

INSTALLATION INSTRUCTIONS FOR 15256-732-L FOR LED PENDANT

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Install the nipple (F) to the crossbar (A) and use the hex nut (D) and key washer (E) to fix tightly. Note: The length of nipple (F) into the crossbar (A) may be adjusted if necessary.
4. Attach the crossbar (A) to junction box (not included) using the mounting screws (C) (Size: 8-32*1/2"L). The side of crossbar (A) marked "GND" must face out.
5. Install the canopy loop (G) onto the nipple (F).
6. Install the aluminum pole (M) onto the fixture body (O).
7. Adjust four rod (N) to rectangle distribution so that they can fit with the fixture body (O). Note: Install rod (N) to the upper hook on the aluminum pole (M) first, then attach rod (N) to the lower hook of fixture body (O).
8. Adjust chain (I) to the desired hanging height and use a pair of proper chain pliers (not included) to remove and discard excess chain.
9. Attach one quick link (H) to the end of chain (I) and then to the fixture loop (L). Slip the lock collar (K) and canopy (J) over chain (I) and allow them to rest the fixture loop (L). Attach another quick link (H) to the other end of chain and then to the canopy loop (G).
10. Carefully feed the wire through the chain (I), lock collar (K), canopy (J), canopy loop (G) and nipple (F).

CONNECTING THE WIRES (Fig.2&Fig.3)

11. Connect the red output wire (marked output +) from driver to the red input wire (marked LED +) from the led module. Connect the black output wire (marked output -) from driver to the black input wire (marked LED -) from led module. See Fig. 2, make sure that all wire connectors are secured.
12. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the crossbar (A) using the green screw (B) provided.
13. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

14. Raise the canopy (J) over canopy loop (G) and secure the canopy (J) to the ceiling with lock collar (K).
15. Align the one long acrylic tube (S) (The longer one is installed in the middle) and six short acrylic tubes (T) with aluminum poles (P), and tighten them appropriately.
16. Press the clip (U) of chain (R/Q) and pass through onto the hole of the fixture body (O), then separate the clip (U) apart using a pin (not included) to hang tightly. (Sequence: R-Q, short chains (Q) on the inside, long chains (R) on the outside).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LED. Hold the fixture by the base or fixture body only.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ETV and/or LED compatible wall dimmer switches



Notice: It is important to use proper chain pliers (not included) .To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

Fig.1

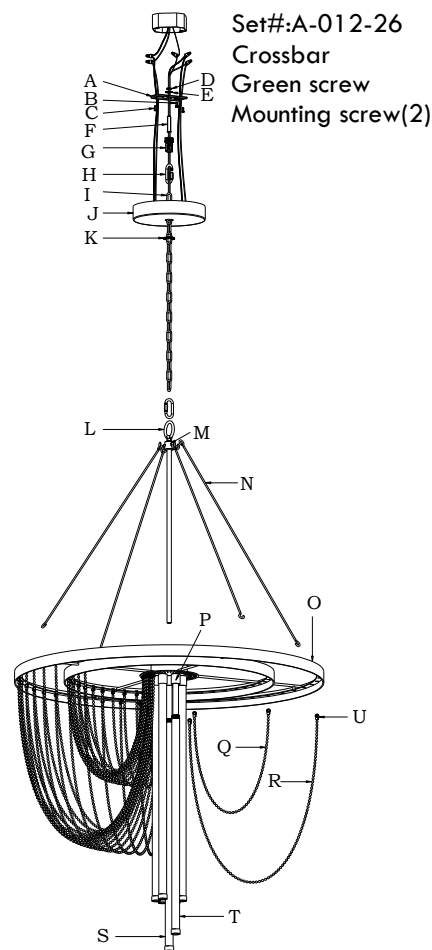


Fig.2

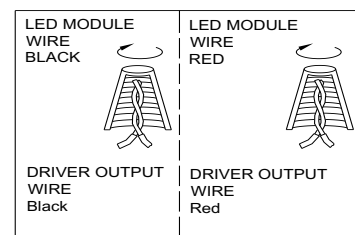


Fig.3

