

INSTALLATION INSTRUCTIONS FOR 2555-855-L FOR LED ISLAND

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position the mounting plate (A) onto the ceiling and mark the location of the two drywall anchors (D). Pre-drill the holes for the drywall anchors (D) and insert the drywall anchors (D) into the ceiling.
4. Attach the mounting plate (A) to the junction box (not included) using the mounting screws (C) (Size: 8-32*1/2"L). The side of the mounting plate (A) marked "GND" must face out.
5. Place the wood screws (E) through the mounting plate (A) and lock them into the drywall anchors (D) to secure the mounting plate (A) to the ceiling.
6. Fixture includes six 12" and two 6" rods. Determine desired hanging height and thread rods (K1/K2) to the nipple (L). Feed fixture wire carefully through each rod.
7. Secure swivel (J) to the last section of rod (K).
8. Slide the back plate (G) onto the two swivels (J), and secure tightly with lock hex nut (H) and key washer (I).
9. Use wire nuts to connect red output wire (marked output +) from driver to two red LED wires (marked LED +) from led module. Connect black output wire (marked output -) from driver to two black LED wires (marked LED -) from led module.
10. The support cable is provided to support the weight of the fixture while wiring. Attach hook (Z) on the end of support cable into a slot located on the mounting plate (A). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig.3)

11. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw (B) provided.
12. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION

13. Raise the back plate (G) to the mounting plate (A) and secure with screw (F).
14. Align the glass (N) with the fixture body (M) and tighten them moderately. Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

Dimmable with ELV and/or LED compatible wall dimmer switches.

Fig.1

Set#: A-021-320108
Mounting plate
Green screw
Wood screw (2)
Drywall anchor (2)
Mounting screw (2)

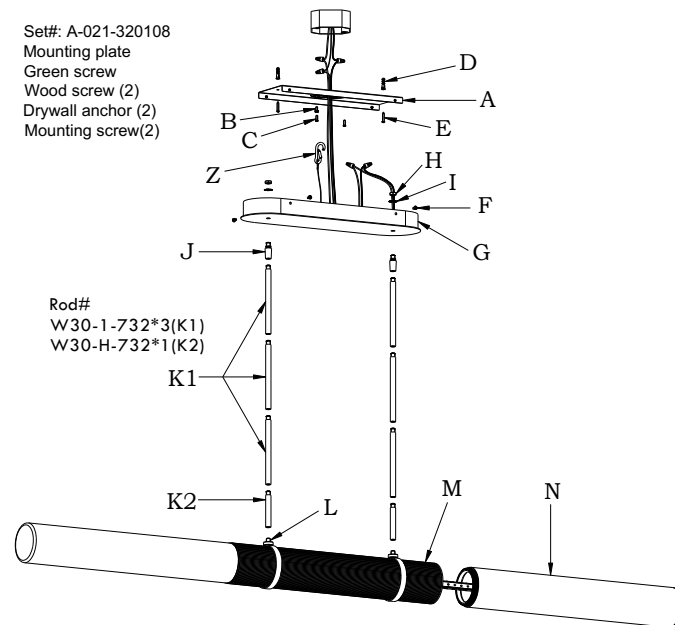


Fig.2

