

# INSTALLATION INSTRUCTIONS

Item#12327-876

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

### ASSEMBLING THE FIXTURE (Fig.1)

3. Loosen mounting screw (E) to remove mounting plate (A) from canopy (F).

4. Attach mounting plate (A) to junction box (Not included) using junction box screws (B) (Size: #8-32N\*L1"). The side of the mounting plate (A) marked "GND" must face out.

5. Determine desired hanging height and thread rods (I/ H) onto coupling on fixture body (J). Pass wires carefully through each rod as you assemble.

6. Push fixture wires carefully through the swivel (G) and secure swivel(G) onto rods (H/I). Pass fixture wire carefully through the canopy (F). Place the canopy (F) and metal sheet(Q) and washer (D), hex nut (C) onto all the thread of swivel (G), secure with them by using hex nut (C).

### CONNECTING THE WIRES (Fig. 2)

7. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (A) using the green screw provided.

8. Tuck wire connectors neatly into the junction box.

### COMPLETING THE INSTALLATION (Fig. 1)

9. Raise the canopy (F) to the ceiling. Line up the holes in canopy with holes in mounting plate (A) and secure with four mounting screws (E).

10. Loosen socket ring (N) to remove from the socket (K) of the fixture body (J). Install (8) eight candelabra base T6 bulbs (P) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification

—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

11. Screw glass shade (M) over the socket (K) in fixture body(J) by using socket ring (N) with tooling (O) provided. Do not over tighten.

Your installation is now complete. Return power to the junction box and test the fixture.

**Note:** Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

The fixture is over 10 lbs. Please remove all glasses before removing canopy from mounting plate to inspect wire connections in the future. This will allow you to hold the fixture body during wire

Fig.1

Set#A-021-250105

-Mounting plate

-Ground Screw

-Junction Box Screw\*2

Rod#

W32-H-732 X 2 (H-6")

W32-1-732 X 6 (I-12")



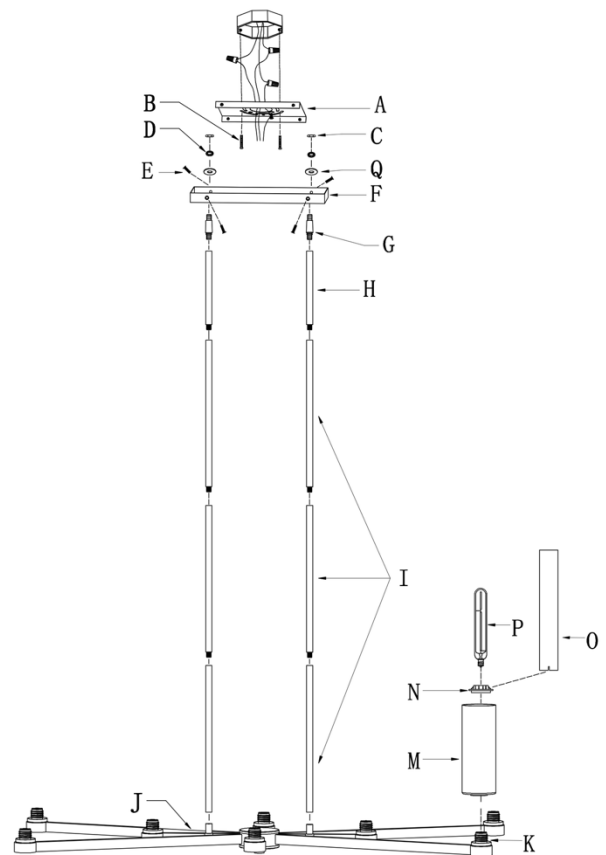


Fig. 2

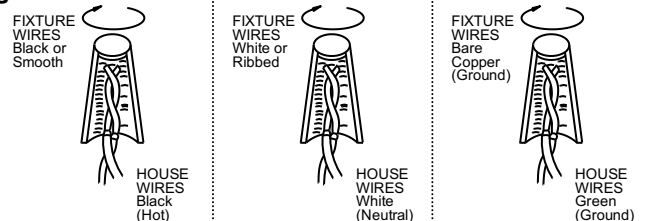


american  
lighting  
association

**Fig.3**

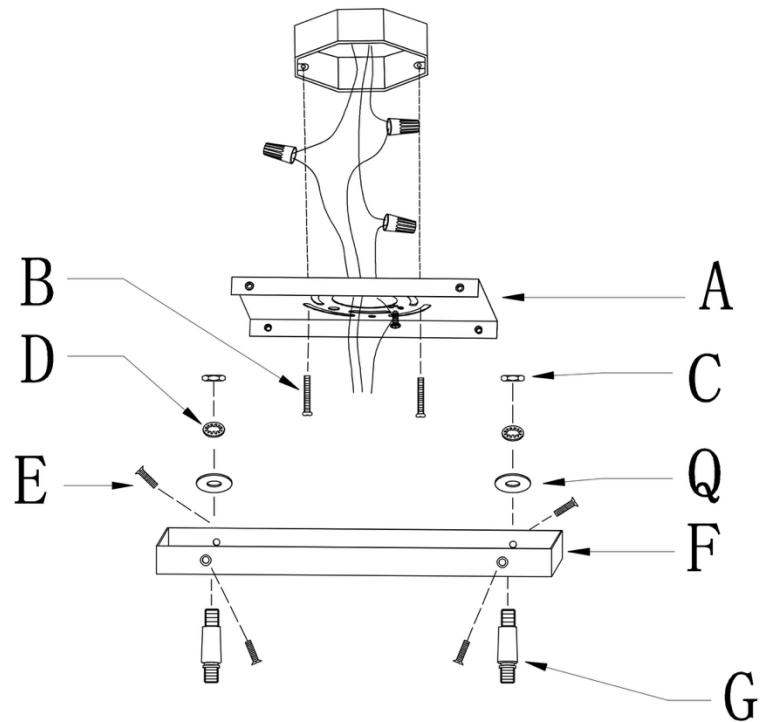

**a. Hardware Bag:**

- A. Mounting plate\*1
- B. Junction Box Screw\*2
- C. Hex nut \*2
- D. Washer\*2
- Q. Metal sheet\*2
- E. Mounting screw\*4
- F. Canopy\*1
- G. Swivel\*1

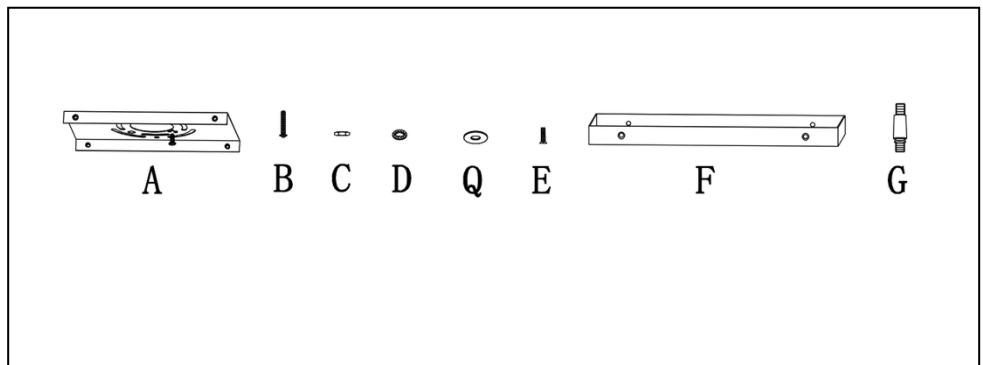

**b. Hardware Bag:**

- I. ROD 12"\*6
- H. ROD 6"\*2

