

INSTALLATION INSTRUCTIONS

Item#12728-796

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Spread Fixture Arms (A) and align each Fixture Arm (A) to the holes on top of fixture body (J). Secure with Fixture screws (B).
4. Attach mounting plate (H) to Junction Box (J) (Not included) using Mounting Screws (G) (Size: #8-32N*L1"). The side of the mounting plate marked "GND" must face out.
5. Determine the desired hanging height and thread rods (D, C) to all thread on top of Center Connector. Pass the wires carefully through each rod as you assemble. Secure Rods (D,C) to all thread of Canopy (F). Pull wires through Canopy (F) as you assemble.
6. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (H) and attach hook (L) on the end of support cable into a slot located on mounting plate (H). Carefully allow the support cable to support the weight of the fixture while wiring.

CONNECTING THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in fig 2, making sure that all Wire Connectors are secured. If your Junction Box (not included) has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (H) using green screw provided.
8. Tuck the wire connectors neatly into Junction Box.


FINISH THE INSTALLATION (Fig. 1)

9. Align canopy (F) onto mounting plate (H) and secure with screws (M).
10. Install the glass(Q) to the socket with the socket ring(P)
11. Install (8) eight candelabra bulbs (N) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

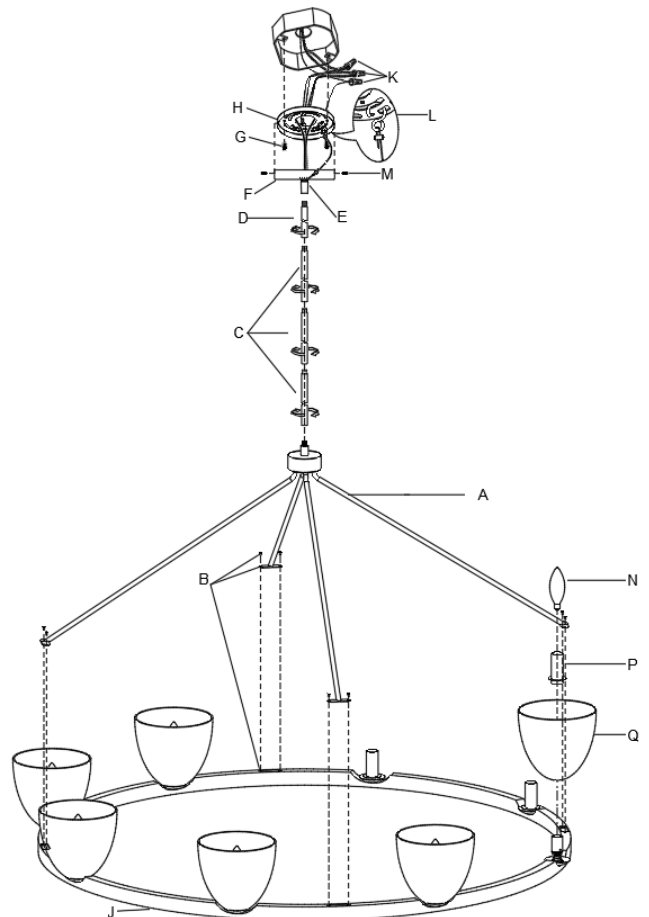

Set#A-022-120

- Ground Screw

- Mounting

Screw*2

Rod#

W30-H-732*1(D)

W30-1-732*3 (C)

Fig. 2

