

# INSTALLATION INSTRUCTIONS FOR 5649-XXX-L FOR LED PENDANT

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR**

## MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove the existing fixture and its mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the junction box (not included) using mounting screws (C) (Size: 8-32\*1/2"L). The side of the mounting plate marked "GND" must face out.
4. The red and black input wires from the led module are marked LED+ & LED-. There is a driver inside of the canopy (D). Connect the red output wire (marked output+) from the driver to the red wire (marked LED+) from the LED module and the black one (marked output-) to the black wire (marked LED-) from the LED module. See Fig. 2, make sure that all wire connectors are secured.
5. Fixture includes three 12" and one 6" rods. Determine desired hanging height and thread rods (F1/F2) to the nipple (G). If installing with one 6" rod only the all thread must be removed. Then feed fixture wire carefully through each rod.
6. Rotate the acrylic tube (I) into metal cap (H). Do not over tighten.
7. Slide metal washer (J), glass (K), metal tube (L/M) (in order "J-K-J-L-J-K-J-L-J-K-J-M-J-K-J" until the whole tube is filled) onto the acrylic tube (I) and secure with the finial (N).

## CONNECTION THE WIRES (Fig. 3)

8. Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from driver to the black wire from the junction box. If your junction box has a ground wire (green or bare copper), connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate (A) using the green screw (B) provided.
9. Tuck wire connectors neatly into the junction box.

## FINISHING THE INSTALLATION (Fig. 1)

10. Align the canopy (D) over the mounting plate (A) and secure with screws (E).

Your installation is now complete. Return power to the junction box and test the fixture.

**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation.

**Dimmable with ELV and/or LED compatible wall dimmer switches.**

Fig.1

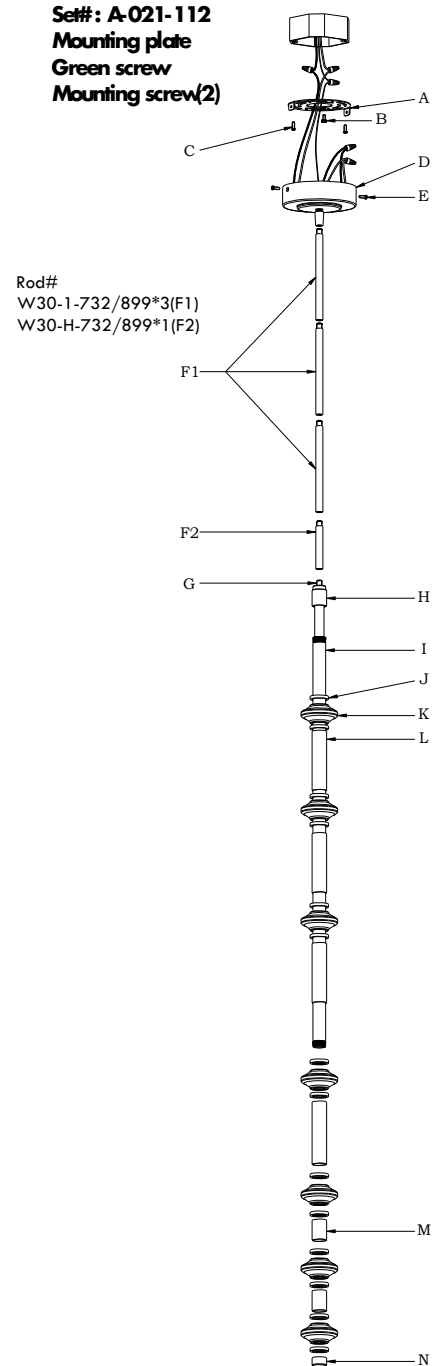


Fig.2




Fig.3

