

Luminaire


Code A676-015
Name AURA PLUS TRANSLUCENT

Measurerm.


Code CL41A19F002G
Name AURA PLUS TRANSLUCENT

| | | | | | | | |
|----------------------------|-----------|-----------------|-----------|-----------------------------|------------------|-----------------------|-----------------------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG | Sym. on planes 270-90 |
| Round Luminaire | | Diam. | 250 mm | Height | 95 mm | | |
| Round Luminous Area | | Diam. | 120 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.011310 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.002736 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Sym. on planes 270-90 | |
| Date | | 03-01-2019 | | Maximum Gamma Angle | | 90 | |
| Measurement Distance | | 6.44 | | Measurement Flux | | 469.50 lm | |
| Operator | | Asselum T2 | | Source Voltage [V] | | 230.25 V | |
| Temperature | | 24.70 °C | | Source current [A] | | 0.04 A | |
| Humidity | | 23.50 % | | Photocell | | Prc | |
| Notes | | RM18121701.7 | | | | | |

| Line | | Code | | Luminaire Lamps | | Flux [lm] | Pow. [W] | Q.ty |
|--------|------------------|------|--|-----------------|------|-----------|----------|------|
| | | LED | | Name | | 469.50 | 8.74 | 1 |
| | | | | LED | | | | |
| C.I.E. | 42 79 95 100 100 | | | D DIN 5040 | A30 | | | |
| F UTE | 1.00 E | | | B NBN | BZ 5 | | | |

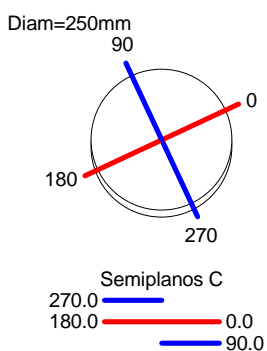

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

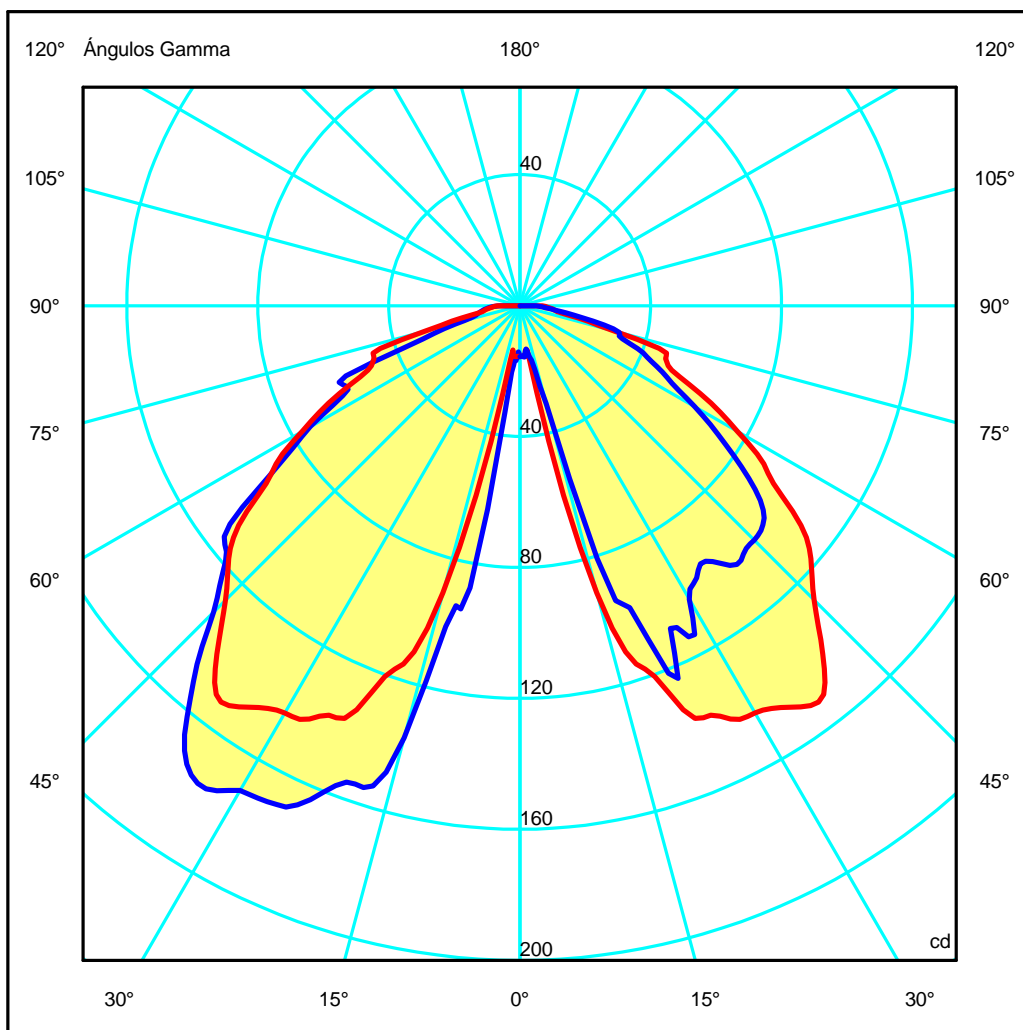

Luminaire

Code A676-015
Name AURA PLUS TRANSLUCENT

Measur.



Code CL41A19F002G
Name AURA PLUS TRANSLUCENT

| | | | | | | | | | | | | | |
|---------------------------------------|-----------|-----------------|----------|-----------|----------|----------|--------|------------------|---------|-------------------|---------|---------|---------|
| Luminaire Flux | 469.50 lm | Luminaire Power | | 8.74 W | | Efficacy | | 53.75 lm/W | | Efficiency | | 100.00% | |
| Lamps Flux | 469.50 lm | Maximum value | | 175.55 cd | | Position | | C=285.00 G=32.50 | | CG Sym. on planes | | 270-90 | |
| Luminous Intensity Table cd Table 1/1 | | | | | | | | | | | | | |
| | C 270.00 | C 285.00 | C 300.00 | C 315.00 | C 330.00 | C 345.00 | C 0.00 | C 15.00 | C 30.00 | C 45.00 | C 60.00 | C 75.00 | C 90.00 |
| G 0.0 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 | 15.58 |
| G 2.5 | 14.48 | 15.03 | 14.49 | 15.74 | 15.20 | 15.73 | 15.46 | 15.53 | 15.62 | 15.05 | 15.45 | 16.21 | 15.53 |
| G 5.0 | 16.11 | 14.79 | 16.44 | 14.69 | 15.66 | 15.47 | 15.65 | 14.74 | 14.30 | 13.77 | 15.11 | 14.04 | 15.76 |
| G 7.5 | 21.56 | 16.93 | 23.95 | 15.76 | 19.24 | 15.49 | 15.50 | 14.73 | 14.26 | 14.40 | 14.50 | 14.45 | 13.47 |
| G 10.0 | 87.55 | 25.04 | 64.48 | 25.17 | 31.81 | 16.50 | 16.90 | 18.74 | 15.04 | 16.48 | 14.82 | 16.48 | 15.00 |
| G 12.5 | 95.41 | 85.89 | 98.14 | 64.87 | 96.81 | 35.98 | 50.88 | 48.34 | 18.00 | 32.60 | 17.66 | 19.45 | 17.18 |
| G 15.0 | 136.66 | 99.88 | 127.24 | 113.70 | 136.55 | 97.81 | 90.86 | 95.04 | 52.96 | 68.41 | 30.58 | 71.37 | 31.05 |
| G 17.5 | 154.36 | 147.72 | 154.66 | 131.92 | 146.93 | 126.28 | 113.24 | 111.26 | 90.90 | 107.12 | 76.49 | 113.09 | 89.90 |
| G 20.0 | 154.87 | 149.57 | 148.22 | 151.32 | 152.10 | 147.88 | 120.57 | 118.31 | 124.80 | 119.36 | 93.35 | 122.12 | 98.18 |
| G 22.5 | 162.20 | 155.76 | 161.13 | 154.92 | 152.58 | 142.24 | 135.53 | 122.72 | 116.75 | 123.14 | 112.70 | 132.81 | 124.15 |
| G 25.0 | 169.03 | 163.69 | 162.69 | 157.62 | 152.83 | 147.29 | 138.00 | 126.62 | 123.05 | 119.53 | 116.08 | 125.48 | 108.84 |
| G 27.5 | 170.24 | 165.99 | 162.99 | 164.49 | 156.87 | 151.08 | 142.59 | 132.28 | 126.61 | 123.18 | 122.06 | 128.82 | 114.48 |
| G 30.0 | 170.99 | 170.40 | 166.95 | 165.17 | 160.95 | 150.51 | 143.65 | 139.04 | 131.98 | 131.68 | 118.77 | 126.82 | 103.60 |
| G 32.5 | 175.49 | 175.55 | 167.51 | 164.08 | 160.16 | 152.48 | 145.71 | 143.51 | 137.42 | 136.88 | 116.65 | 130.22 | 99.75 |
| G 35.0 | 175.08 | 172.56 | 167.42 | 166.06 | 158.55 | 154.01 | 149.61 | 144.60 | 141.67 | 137.81 | 117.01 | 129.09 | 96.24 |
| G 37.5 | 168.42 | 170.40 | 162.21 | 161.26 | 155.94 | 154.40 | 151.42 | 143.24 | 143.55 | 140.54 | 122.17 | 129.65 | 98.88 |
| G 40.0 | 156.62 | 161.01 | 154.94 | 158.32 | 151.46 | 150.87 | 144.76 | 140.25 | 141.02 | 136.12 | 126.46 | 126.87 | 103.24 |
| G 42.5 | 144.92 | 152.19 | 142.69 | 152.45 | 141.00 | 143.97 | 135.50 | 129.53 | 135.38 | 130.94 | 124.90 | 123.82 | 101.68 |
| G 45.0 | 132.24 | 142.60 | 132.13 | 139.32 | 130.26 | 136.52 | 127.17 | 124.27 | 129.22 | 126.29 | 120.71 | 119.72 | 101.22 |
| G 47.5 | 123.84 | 130.42 | 123.87 | 128.28 | 121.80 | 127.67 | 121.03 | 117.07 | 123.88 | 120.54 | 118.68 | 115.61 | 100.34 |
| G 50.0 | 116.93 | 121.58 | 119.60 | 120.61 | 113.76 | 120.82 | 115.44 | 111.77 | 115.80 | 112.07 | 115.61 | 108.69 | 97.07 |
| G 52.5 | 113.10 | 117.59 | 110.91 | 113.28 | 104.72 | 111.11 | 106.81 | 102.22 | 108.17 | 100.69 | 107.75 | 98.68 | 89.45 |
| G 55.0 | 97.71 | 108.69 | 101.91 | 105.57 | 97.06 | 100.76 | 94.61 | 90.67 | 98.35 | 91.31 | 97.60 | 86.22 | 79.78 |
| G 57.5 | 83.66 | 96.35 | 89.36 | 97.23 | 87.55 | 92.16 | 87.32 | 79.47 | 88.32 | 81.65 | 86.74 | 73.25 | 70.37 |
| G 60.0 | 73.88 | 84.12 | 74.82 | 85.93 | 75.27 | 82.96 | 76.75 | 70.53 | 77.61 | 71.67 | 76.47 | 63.40 | 61.66 |
| G 62.5 | 62.50 | 70.07 | 64.34 | 72.28 | 64.71 | 70.73 | 67.53 | 62.07 | 68.19 | 61.53 | 67.78 | 55.62 | 53.40 |
| G 65.0 | 58.40 | 61.11 | 59.33 | 62.66 | 58.49 | 60.17 | 57.13 | 54.19 | 58.21 | 53.78 | 58.96 | 49.09 | 48.03 |
| G 67.5 | 60.43 | 59.20 | 56.70 | 59.53 | 55.13 | 55.09 | 49.20 | 47.46 | 51.15 | 47.62 | 51.08 | 43.51 | 42.72 |
| G 70.0 | 37.85 | 60.05 | 48.12 | 53.29 | 45.76 | 51.40 | 47.40 | 44.36 | 45.49 | 40.59 | 44.65 | 35.56 | 38.32 |
| G 72.5 | 25.81 | 37.71 | 28.39 | 45.06 | 33.84 | 42.43 | 47.05 | 35.73 | 40.24 | 38.32 | 37.53 | 33.01 | 32.06 |
| G 75.0 | 17.49 | 23.23 | 17.93 | 26.80 | 20.85 | 30.97 | 29.90 | 31.29 | 34.61 | 31.45 | 36.54 | 28.67 | 31.42 |
| G 77.5 | 14.02 | 16.32 | 14.11 | 18.47 | 15.33 | 20.03 | 19.76 | 20.10 | 27.80 | 20.06 | 29.55 | 20.12 | 24.66 |
| G 80.0 | 12.69 | 13.63 | 12.62 | 13.65 | 12.48 | 14.64 | 12.71 | 12.94 | 17.70 | 12.89 | 18.19 | 12.76 | 16.69 |
| G 82.5 | 11.43 | 12.25 | 11.39 | 12.21 | 10.72 | 11.87 | 10.88 | 10.14 | 12.20 | 9.46 | 11.74 | 8.52 | 11.40 |
| G 85.0 | 10.23 | 10.88 | 9.98 | 10.87 | 9.55 | 10.21 | 9.52 | 8.79 | 9.12 | 8.09 | 8.99 | 7.08 | 8.20 |
| G 87.5 | 8.45 | 9.42 | 8.34 | 9.41 | 8.41 | 8.66 | 8.13 | 7.82 | 7.71 | 6.76 | 7.34 | 5.99 | 6.44 |
| G 90.0 | 6.12 | 6.29 | 6.57 | 6.86 | 6.94 | 6.67 | 6.89 | 6.77 | 6.27 | 6.09 | 5.87 | 5.26 | 4.90 |

Luminaire
Code A676-015
Name AURA PLUS TRANSLUCENT
Measurem.
Code CL41A19F002G
Name AURA PLUS TRANSLUCENT


| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|------------------|------------|-----------------------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG | Sym. on planes 270-90 |

Diam=250mm

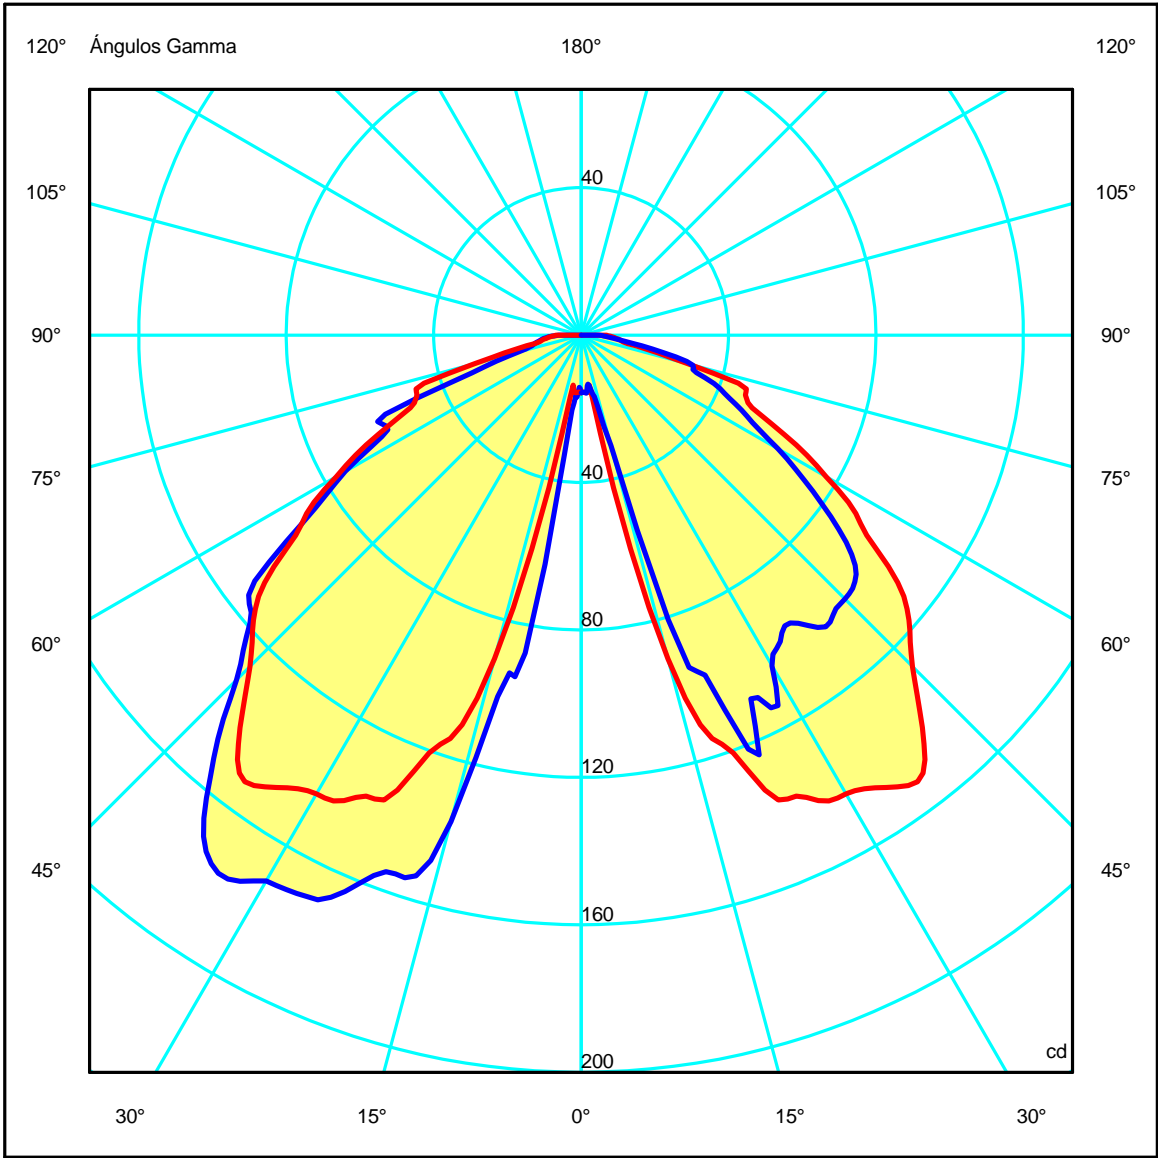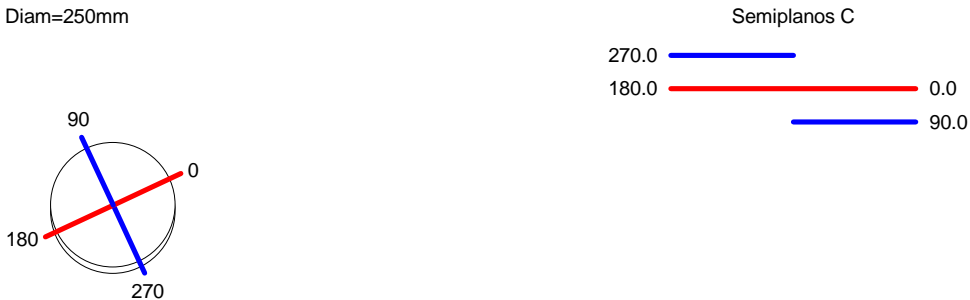

Luminaire
Code A676-015
Name AURA PLUS TRANSLUCENT
Measur.
Code CL41A19F002G
Name AURA PLUS TRANSLUCENT

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|------------------|------------|-----------------------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG | Sym. on planes 270-90 |

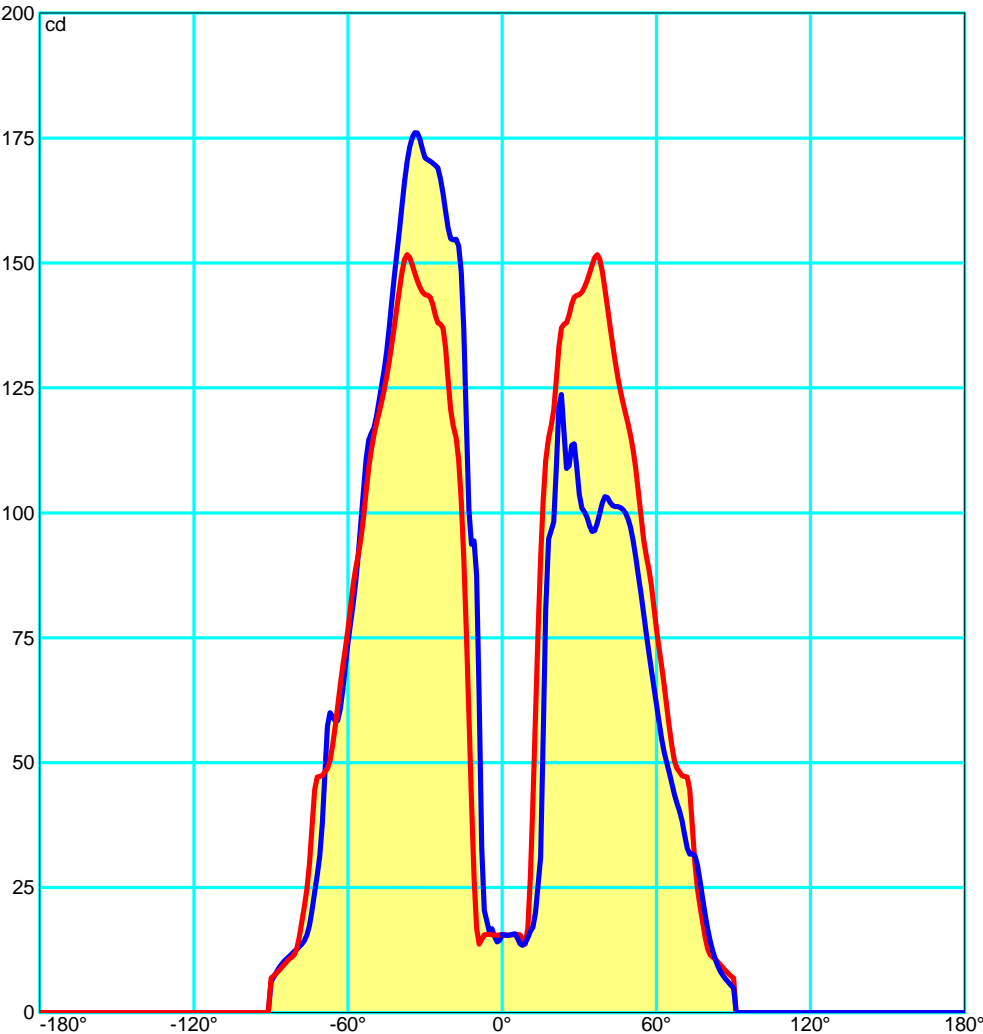

Luminaire

Code A676-015
Name AURA PLUS TRANSLUCENT

Measur.

Code CL41A19F002G
Name AURA PLUS TRANSLUCENT


| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|------------------|------------|-----------------------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG | Sym. on planes 270-90 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 1.00 | 1.99 | 2.99 | 3.98 | 4.98 | OC | 1.53 | 3.06 | 4.58 | 6.11 | 7.64 |
| OB | 0.50 | 1.01 | 1.51 | 2.02 | 2.52 | OD | 1.55 | 3.09 | 4.64 | 6.19 | 7.74 |

Luminous Intensities [cd]

| | | | | | | | | | | |
|----|-------|-------|--------|--------|--------|--------|-------|-------|-------|-------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 15.58 | 15.65 | 90.86 | 138.00 | 149.61 | 127.17 | 94.61 | 57.13 | 29.90 | 9.52 |
| OB | 15.58 | 15.65 | 90.86 | 138.00 | 149.61 | 127.17 | 94.61 | 57.13 | 29.90 | 9.52 |
| OC | 15.58 | 15.76 | 31.05 | 108.84 | 96.24 | 101.22 | 79.78 | 48.03 | 31.42 | 8.20 |
| OD | 15.58 | 16.11 | 136.66 | 169.03 | 175.08 | 132.24 | 97.71 | 58.40 | 17.49 | 10.23 |

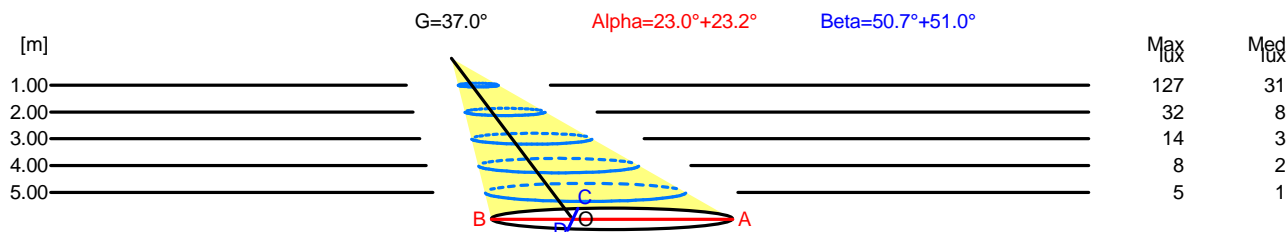

| H[m] | D[m] | Max lux | Med lux | Alpha=23.0°+23.2° | G=37.0 |
|------|------|---------|---------|-------------------|--------|
| 1.00 | 1.50 | 127 | 31 | | |
| 2.00 | 3.00 | 32 | 8 | | |
| 3.00 | 4.50 | 14 | 3 | | |
| 4.00 | 6.00 | 8 | 2 | | |
| 5.00 | 7.50 | 5 | 1 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=51.0°+50.7° | G=0.0 |
|------|-------|---------|---------|------------------|-------|
| 1.00 | 3.07 | 127 | 31 | | |
| 2.00 | 6.15 | 32 | 8 | | |
| 3.00 | 9.22 | 14 | 3 | | |
| 4.00 | 12.30 | 8 | 2 | | |
| 5.00 | 15.37 | 5 | 1 | | |

Luminaire

Code A676-015
Name AURA PLUS TRANSLUCENT

Measurem.

Code CL41A19F002G
Name AURA PLUS TRANSLUCENT

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|------------------|------------|-----------------------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG | Sym. on planes 270-90 |

UGR
S = 0.250

| Reflectancies | | | | | | | | | | |
|----------------|------------------|------|------|------|------|----------------|------|------|------|------|
| Ceiling/Cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| Walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| WorkingPlane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| RoomDimensions | Viewed Crosswise | | | | | Viewed Endwise | | | | |
| x=2H y=2H | 22.1 | 23.5 | 22.4 | 23.7 | 24.0 | 22.5 | 23.9 | 22.8 | 24.1 | 24.4 |
| x=2H y=3H | 23.5 | 24.8 | 23.9 | 25.0 | 25.3 | 24.0 | 25.3 | 24.4 | 25.5 | 25.8 |
| x=2H y=4H | 24.2 | 25.3 | 24.5 | 25.6 | 25.9 | 24.3 | 25.5 | 24.6 | 25.8 | 26.1 |
| x=2H y=6H | 24.4 | 25.5 | 24.7 | 25.8 | 26.1 | 24.4 | 25.5 | 24.8 | 25.8 | 26.1 |
| x=2H y=8H | 24.4 | 25.5 | 24.8 | 25.8 | 26.1 | 24.5 | 25.6 | 24.9 | 25.9 | 26.2 |
| x=2H y=12H | 24.5 | 25.5 | 24.9 | 25.9 | 26.2 | 24.6 | 25.6 | 25.0 | 26.0 | 26.3 |
| x=4H y=2H | 22.8 | 24.0 | 23.1 | 24.3 | 24.6 | 23.2 | 24.4 | 23.5 | 24.6 | 24.9 |
| x=4H y=3H | 24.4 | 25.4 | 24.8 | 25.7 | 26.1 | 24.8 | 25.8 | 25.2 | 26.1 | 26.5 |
| x=4H y=4H | 25.1 | 26.0 | 25.5 | 26.3 | 26.7 | 25.1 | 26.0 | 25.5 | 26.4 | 26.7 |
| x=4H y=6H | 25.4 | 26.2 | 25.8 | 26.5 | 27.0 | 25.3 | 26.1 | 25.7 | 26.5 | 26.9 |
| x=4H y=8H | 25.5 | 26.2 | 25.9 | 26.6 | 27.0 | 25.5 | 26.2 | 25.9 | 26.6 | 27.0 |
| x=4H y=12H | 25.7 | 26.3 | 26.1 | 26.7 | 27.2 | 25.7 | 26.3 | 26.1 | 26.7 | 27.2 |
| x=8H y=4H | 25.3 | 26.1 | 25.8 | 26.5 | 26.9 | 25.3 | 26.0 | 25.7 | 26.4 | 26.8 |
| x=8H y=6H | 25.7 | 26.3 | 26.2 | 26.8 | 27.2 | 25.6 | 26.2 | 26.1 | 26.6 | 27.1 |
| x=8H y=8H | 25.9 | 26.5 | 26.4 | 26.9 | 27.4 | 25.8 | 26.4 | 26.3 | 26.8 | 27.3 |
| x=8H y=12H | 26.2 | 26.6 | 26.7 | 27.1 | 27.6 | 26.2 | 26.6 | 26.6 | 27.1 | 27.6 |
| x=12H y=4H | 25.4 | 26.0 | 25.8 | 26.4 | 26.9 | 25.3 | 26.0 | 25.7 | 26.4 | 26.8 |
| x=12H y=6H | 25.8 | 26.3 | 26.3 | 26.8 | 27.2 | 25.6 | 26.2 | 26.1 | 26.6 | 27.1 |
| x=12H y=8H | 26.0 | 26.5 | 26.5 | 26.9 | 27.4 | 25.9 | 26.4 | 26.4 | 26.8 | 27.3 |

Luminaire
Code A676-015
Name AURA PLUS TRANSLUCENT
Measurem.
Code CL41A19F002G
Name AURA PLUS TRANSLUCENT

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|------------------|--------------------------|---------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG Sym. on planes 270-90 | |

Flujo Total=469.50 Flujo Luminaria=469.50

| | | | | | | | | | | | | |
|-----|------|------|------|------|------|------|------|------|------|------|-------|-------|
| RI | 0.60 | 0.80 | 1.00 | 1.25 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 10.00 | 20.00 |
| DRR | 0.26 | 0.35 | 0.43 | 0.51 | 0.57 | 0.66 | 0.72 | 0.76 | 0.82 | 0.85 | 0.91 | 0.95 |
| RC | 6 | 6 | 6 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 6 | 6 |


Flujo Zonal por 1000 Lúmenes

| | | | | | | | | | | | | | | | | | | |
|-------|----|----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| Y° | 10 | 20 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 |
| ZF(Y) | 4 | 59 | 197 | 393 | 605 | 789 | 913 | 978 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |

Códigos de Flujo C.I.E.
42 79 95 100 100

C.I.E. 6/6/6/5/5/5/5/5/6/6
D DIN 5040 A30
F UTE 1.00 E
B NBN BZ 5
RN 0.00000 %
BLF 1.0

LOR 100.00000 %
ULOR 0.00000 %
DLOR 100.00000 %
UFF 0.00000 %
DFF 100.00000 %
FFR 0.00000 %

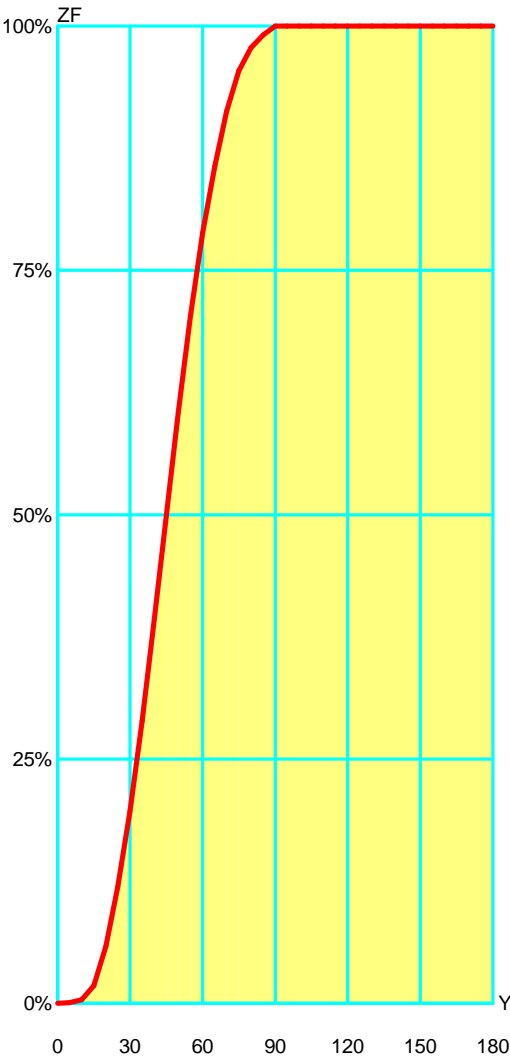

| Flujo Zonal | | | | |
|-------------|--------|---------|-----------|----------|
| Gamma ° | Flujo | Suma lm | Flujo [%] | Suma [%] |
| 0° | 0.00 | 0.00 | 0.00 % | 0.00 % |
| 5° | 0.78 | 0.78 | 0.08 % | 0.08 % |
| 10° | 2.88 | 3.66 | 0.29 % | 0.37 % |
| 15° | 14.24 | 17.90 | 1.42 % | 1.79 % |
| 20° | 40.67 | 58.58 | 4.07 % | 5.86 % |
| 25° | 61.04 | 119.62 | 6.10 % | 11.96 % |
| 30° | 77.01 | 196.63 | 7.70 % | 19.66 % |
| 35° | 92.19 | 288.81 | 9.22 % | 28.88 % |
| 40° | 104.11 | 392.93 | 10.41 % | 39.29 % |
| 45° | 107.37 | 500.30 | 10.74 % | 50.03 % |
| 50° | 104.84 | 605.14 | 10.48 % | 60.51 % |
| 55° | 98.55 | 703.69 | 9.85 % | 70.37 % |
| 60° | 84.89 | 788.57 | 8.49 % | 78.86 % |
| 65° | 68.11 | 856.68 | 6.81 % | 85.67 % |
| 70° | 56.05 | 912.73 | 5.61 % | 91.27 % |
| 75° | 41.44 | 954.17 | 4.14 % | 95.42 % |
| 80° | 23.43 | 977.61 | 2.34 % | 97.76 % |
| 85° | 13.18 | 990.79 | 1.32 % | 99.08 % |
| 90° | 9.21 | 1000.00 | 0.92 % | 100.00 % |
| 95° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 100° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 105° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 110° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 115° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 120° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 125° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 130° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 135° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 140° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 145° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 150° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 155° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 160° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 165° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 170° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 175° | 0.00 | 1000.00 | 0.00 % | 100.00 % |
| 180° | 0.00 | 1000.00 | 0.00 % | 100.00 % |

Luminaire
Code A676-015
Name AURA PLUS TRANSLUCENT
Measur.
Code CL41A19F002G
Name AURA PLUS TRANSLUCENT

| | | | | | | | |
|----------------|-----------|-----------------|-----------|----------|------------------|------------|-----------------------|
| Luminaire Flux | 469.50 lm | Luminaire Power | 8.74 W | Efficacy | 53.75 lm/W | Efficiency | 100.00% |
| Lamps Flux | 469.50 lm | Maximum value | 175.55 cd | Position | C=285.00 G=32.50 | CG | Sym. on planes 270-90 |

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

