


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.: 600mm	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 31.37 lm/W
MODEL	--	I _{max} (cd)	188.1	S/MH (C0/180)	1.26	
NOMINAL POWER (W)	--	LOR (%)	100.0	S/MH (C90/270)	1.27	
RATED VOLTAGE (V)	--	TOTAL FLUX (lm)	778.31	η UP, DN (C0-180)	5.7, 44.3	
NOMINAL FLUX (lm)	778.311	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	5.5, 44.5	
LAMPS INSIDE	1	η up (%)	11.2	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	--	η down (%)	88.8	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

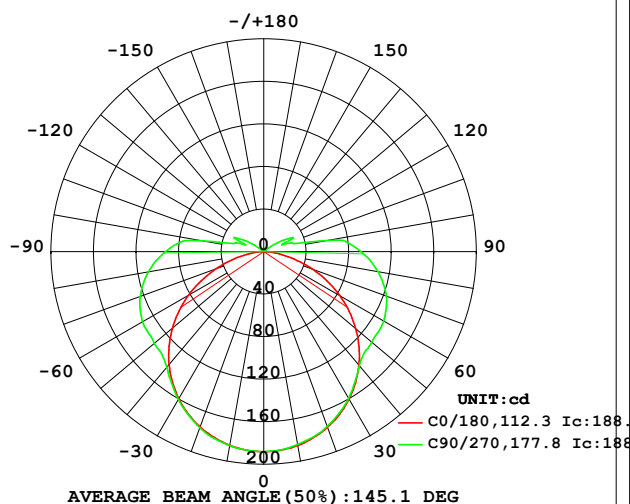

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

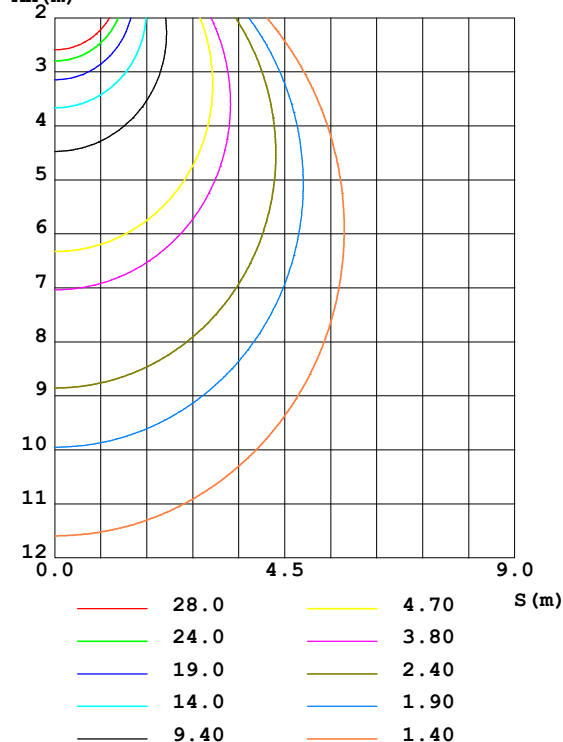

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason Huang
Test Date: 2023-03-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity: 65.0%
Test Distance: 13.486m [K=1.0000]
Remarks: --

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	185.1	184.6	184.1	184.4	184.9	185.1	185.2	185.1	0- 10	17.79	17.79	2.29,2.29
20	175.7	175.0	174.9	174.6	175.3	175.9	176.1	176.1	10- 20	51.05	68.84	8.85,8.85
30	160.4	159.5	159.5	159.1	159.7	160.4	160.6	160.6	20- 30	77.60	146.4	18.8,18.8
40	139.3	138.5	139.9	138.0	138.5	139.3	141.9	139.6	30- 40	93.93	240.4	30.9,30.9
50	113.1	116.2	132.6	115.0	112.1	117.1	134.3	117.0	40- 50	99.80	340.2	43.7,43.7
60	82.40	103.8	130.4	100.9	81.36	103.9	131.6	102.8	50- 60	100.1	440.3	56.6,56.6
70	49.15	94.35	122.7	90.91	48.02	94.00	123.6	92.76	60- 70	95.82	536.1	68.9,68.9
80	17.72	80.77	109.1	77.40	16.74	80.30	110.1	78.99	70- 80	85.43	621.6	79.9,79.9
90	1.014	62.81	91.50	59.42	0.5733	62.25	92.45	61.04	80- 90	69.55	691.1	88.8,88.8
100	0.9697	29.77	62.24	25.35	0.5328	25.82	60.18	28.00	90-100	48.82	739.9	95.1,95.1
110	1.160	19.50	20.24	16.51	0.7106	18.07	19.81	18.10	100-110	18.98	758.9	97.5,97.5
120	1.366	4.231	21.95	3.121	0.9014	3.155	22.02	2.887	110-120	11.86	770.8	99,99
130	1.516	1.694	2.781	1.694	1.025	1.325	2.259	1.332	120-130	3.753	774.5	99.5,99.5
140	1.666	1.762	1.830	1.776	1.216	1.461	1.598	1.475	130-140	1.205	775.7	99.7,99.7
150	1.803	1.844	1.885	1.851	1.462	1.591	1.721	1.612	140-150	1.041	776.8	99.8,99.8
160	1.898	1.912	1.926	1.919	1.639	1.714	1.789	1.741	150-160	0.8181	777.6	99.9,99.9
170	1.953	1.953	1.939	1.953	1.844	1.837	1.871	1.830	160-170	0.5272	778.1	100,100
180	1.953	1.946	1.939	1.933	1.953	1.939	1.939	1.946	170-180	0.1831	778.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 289.97 lm

%lum = 37.3%

%lamp = 37.3%

Conical surface Flux(120deg): 440.32 lm

%lum = 56.6%


%lamp = 56.6%

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Huang
Test Date:2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:13.486m [K=1.0000]
Remarks: --

LUMINANCE LIMITATION CURVES

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.311x1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.: 600mm	

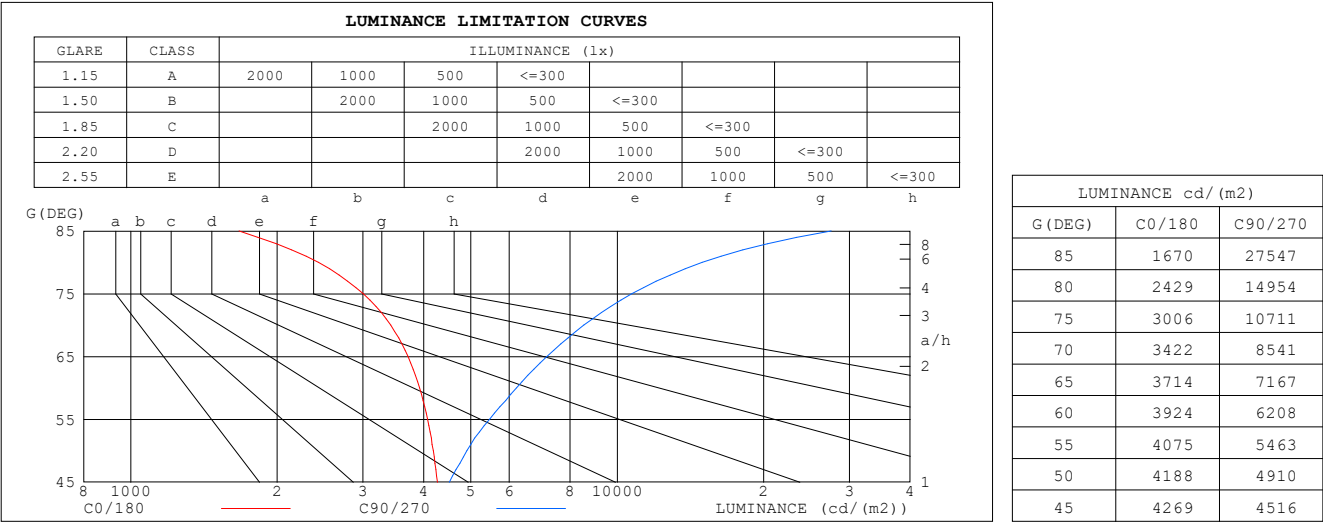


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Huang
Test Date:2023-03-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:13.486m [K=1.0000]
Remarks: --

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.:600mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.12	1.12	1.12	1.05	1.05	1.05	.98	.98	.98	.92	.92	.92	.89
1.0	.96	.90	.85	.93	.88	.83	.86	.82	.78	.80	.77	.74	.75	.72	.70	.66
2.0	.82	.74	.67	.79	.72	.65	.73	.67	.62	.68	.63	.59	.64	.60	.56	.53
3.0	.71	.62	.54	.68	.60	.53	.64	.57	.51	.59	.53	.48	.55	.50	.46	.43
4.0	.62	.53	.45	.60	.51	.44	.56	.48	.42	.52	.46	.41	.49	.43	.39	.36
5.0	.55	.46	.38	.54	.44	.38	.50	.42	.36	.47	.40	.35	.44	.38	.33	.31
6.0	.50	.40	.33	.48	.39	.33	.45	.37	.31	.42	.35	.30	.40	.34	.29	.27
7.0	.45	.36	.29	.43	.35	.29	.41	.33	.28	.38	.32	.27	.36	.30	.26	.23
8.0	.41	.32	.26	.40	.31	.25	.37	.30	.25	.35	.29	.24	.33	.27	.23	.21
9.0	.37	.29	.23	.36	.28	.23	.34	.27	.22	.32	.26	.21	.31	.25	.21	.19
10.0	.34	.26	.21	.33	.26	.20	.32	.25	.20	.30	.24	.19	.28	.23	.19	.17

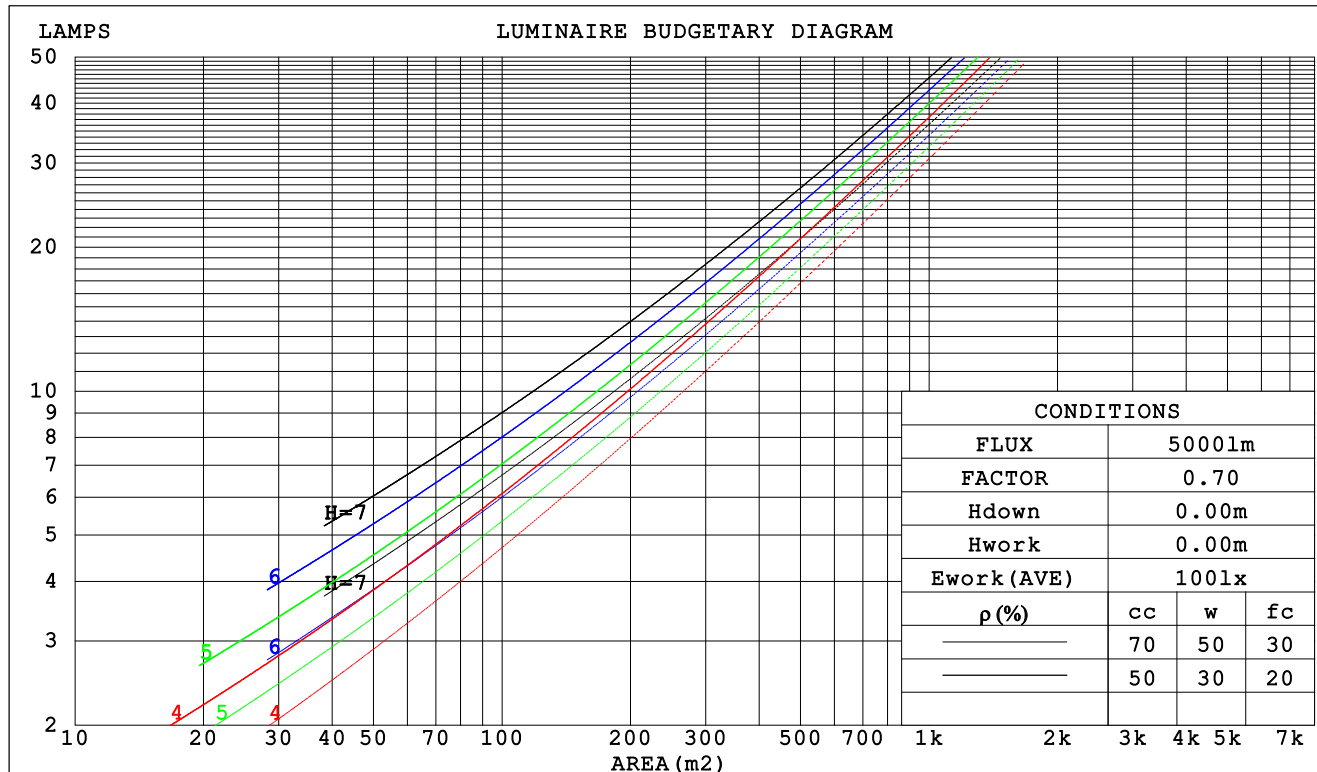

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Huang
Test Date:2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:13.486m [K=1.0000]
Remarks: --

GONIOPHOTOMETERS SYSTEM TEST REPORT

Page 5 Of 11

WEC AND CCEC

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.311x1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.:600mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.407	.231	.073	.396	.226	.072	.376	.216	.069	.358	.206	.066	.341	.197	.064	
2.0	.348	.190	.058	.338	.186	.057	.320	.178	.055	.303	.170	.053	.288	.163	.051	
3.0	.306	.163	.049	.298	.159	.048	.281	.152	.046	.266	.146	.045	.252	.140	.043	
4.0	.274	.143	.042	.266	.139	.041	.252	.134	.040	.238	.128	.039	.226	.123	.037	
5.0	.248	.127	.037	.241	.124	.036	.228	.119	.035	.216	.114	.034	.204	.109	.033	
6.0	.227	.114	.033	.221	.111	.032	.209	.107	.031	.197	.103	.030	.187	.098	.029	
7.0	.209	.103	.029	.203	.101	.029	.192	.097	.028	.182	.093	.027	.172	.090	.026	
8.0	.193	.094	.027	.188	.093	.026	.178	.089	.025	.169	.086	.025	.160	.082	.024	
9.0	.180	.087	.024	.175	.085	.024	.166	.082	.023	.158	.079	.023	.149	.076	.022	
10.0	.168	.081	.022	.164	.079	.022	.156	.076	.021	.148	.073	.021	.140	.071	.020	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.276	.276	.276	.236	.236	.236	.161	.161	.161	.092	.092	.092	.030	.030	.030		
1.0	.273	.241	.213	.234	.207	.183	.160	.142	.127	.092	.082	.074	.029	.027	.024		
2.0	.266	.218	.178	.228	.188	.154	.156	.130	.107	.090	.076	.063	.029	.024	.020		
3.0	.259	.202	.156	.222	.174	.135	.152	.121	.095	.088	.071	.056	.028	.023	.018		
4.0	.251	.189	.142	.215	.163	.123	.148	.114	.087	.086	.067	.051	.028	.022	.017		
5.0	.243	.179	.132	.208	.155	.115	.143	.108	.081	.083	.064	.048	.027	.021	.016		
6.0	.235	.171	.125	.202	.148	.109	.139	.104	.077	.081	.061	.046	.026	.020	.015		
7.0	.227	.164	.120	.196	.142	.105	.135	.100	.074	.079	.059	.044	.025	.019	.015		
8.0	.221	.159	.116	.190	.138	.101	.131	.097	.072	.076	.057	.043	.025	.019	.014		
9.0	.214	.154	.113	.184	.133	.099	.128	.094	.070	.074	.055	.042	.024	.018	.014		
10.0	.208	.150	.111	.179	.130	.097	.124	.091	.069	.073	.054	.041	.024	.018	.014		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Huang
Test Date:2023-03-16

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:13.486m [K=1.0000]
Remarks: --

GONIOPHOTOMETERS SYSTEM TEST REPORT

Page 6 Of 11

UGR(Unified Glare Rating) Table

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm										
NAME: Pendent lamp					TYPE:--			SERIAL No.:FTS23031602L-02		
SPEC.:S09924					DIM.: --					
MFR.: YiZHI					SUR.:600mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	17.9	16.8	18.3	18.7	18.4	19.9	18.9	20.3	20.8
3H	17.9	19.2	18.3	19.7	20.2	21.5	22.9	22.0	23.3	23.8
4H	18.4	19.8	18.9	20.2	20.7	23.2	24.5	23.7	25.0	25.5
6H	18.8	20.1	19.3	20.6	21.1	25.0	26.2	25.5	26.7	27.2
8H	19.0	20.2	19.5	20.7	21.2	26.0	27.2	26.5	27.7	28.2
12H	19.0	20.2	19.5	20.7	21.2	27.1	28.2	27.6	28.7	29.3
4H 2H	17.6	18.9	18.1	19.3	19.8	19.1	20.4	19.6	20.9	21.4
3H	19.4	20.6	19.9	21.1	21.6	22.4	23.6	22.9	24.1	24.6
4H	20.2	21.3	20.8	21.8	22.4	24.3	25.4	24.8	25.9	26.5
6H	20.9	21.9	21.5	22.4	23.0	26.3	27.3	26.9	27.8	28.4
8H	21.1	22.0	21.7	22.6	23.2	27.4	28.3	28.0	28.9	29.5
12H	21.3	22.1	21.8	22.7	23.3	28.7	29.5	29.3	30.1	30.7
8H 4H	21.6	22.5	22.2	23.1	23.7	24.7	25.6	25.3	26.2	26.8
6H	22.8	23.5	23.4	24.1	24.8	27.0	27.8	27.6	28.4	29.1
8H	23.3	24.0	23.9	24.6	25.3	28.4	29.1	29.0	29.7	30.4
12H	23.6	24.2	24.3	24.9	25.6	29.9	30.5	30.5	31.1	31.8
12H 4H	22.1	22.9	22.7	23.5	24.1	24.7	25.6	25.3	26.2	26.8
6H	23.5	24.2	24.1	24.8	25.5	27.2	27.9	27.8	28.5	29.2
8H	24.2	24.8	24.8	25.5	26.2	28.6	29.2	29.3	29.9	30.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.2					+ 0.3 / - 0.4				

CIE Pub.117, 778.3 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.9$)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Huang
Test Date:2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:13.486m [K=1.0000]
Remarks: --

UTILIZATION FACTORS TABLE

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.:600mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	49	37	30	48	37	29	47	36	29	22
0.80	58	45	37	57	45	37	55	44	36	29
1.00	66	53	44	64	52	44	61	53	43	35
1.25	73	60	51	71	59	51	67	57	50	41
1.50	78	65	57	76	64	56	72	62	55	45
2.00	85	74	65	82	72	64	78	69	62	52
2.50	89	79	71	87	77	70	81	73	67	56
3.00	93	84	76	90	82	75	85	77	71	60
4.00	98	90	83	95	87	81	89	83	77	65
5.00	101	94	88	98	91	86	91	86	81	68
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason Huang
 Test Date:2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:13.486m [K=1.0000]
 Remarks: --

ISOCANDELA DIAGRAM

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.:600mm	

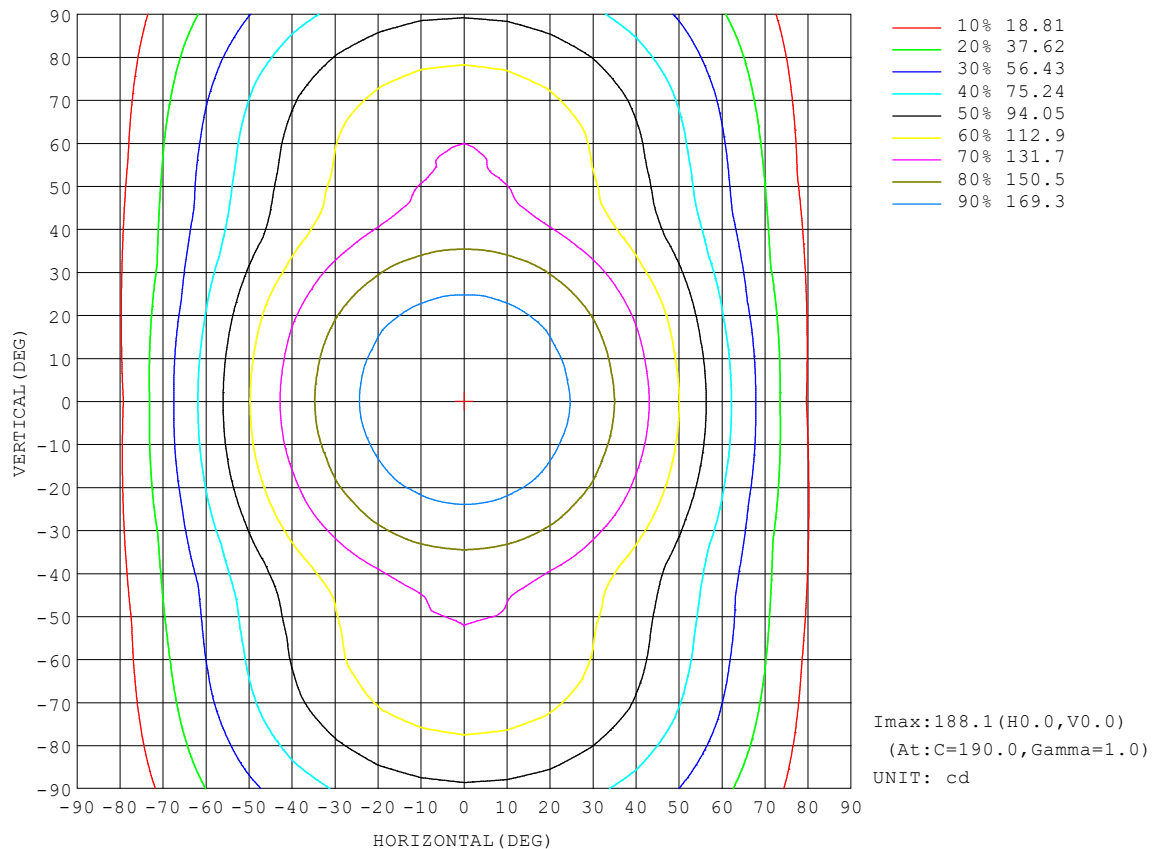


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Jason Huang
Test Date:2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity:65.0%
Test Distance:13.486m [K=1.0000]
Remarks: --

AAI Figure

Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.:600mm	

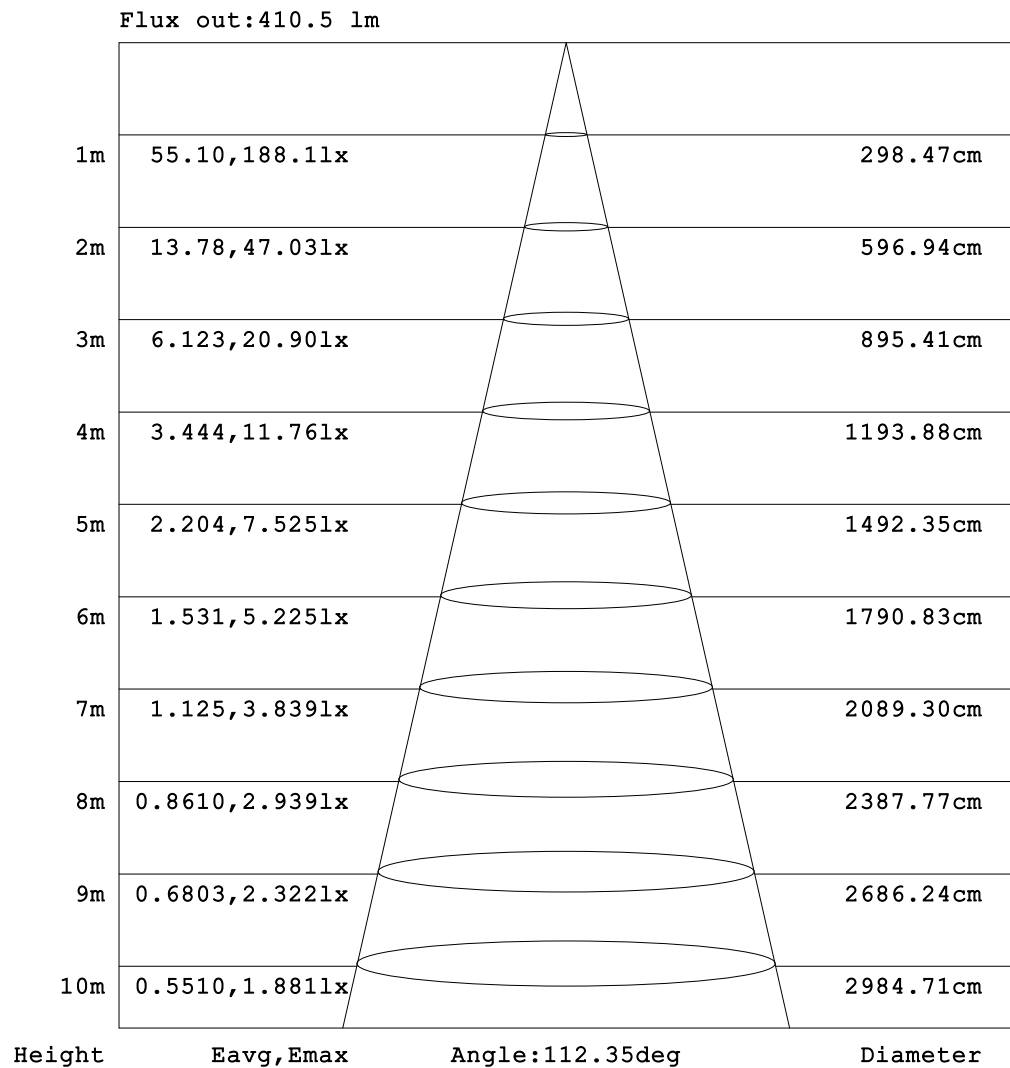


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Jason Huang
 Test Date:2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
 Humidity:65.0%
 Test Distance:13.486m [K=1.0000]
 Remarks: --

ISOLUX DIAGRAM


Test:U:120.07V I:0.231A P:24.81W PF:0.8953 Freq:60.00Hz Lamp Flux:778.31lx1 lm		
NAME: Pendent lamp	TYPE:--	SERIAL No.:FTS23031602L-02
SPEC.:S09924	DIM.: --	
MFR.: YiZHI	SUR.: 600mm	

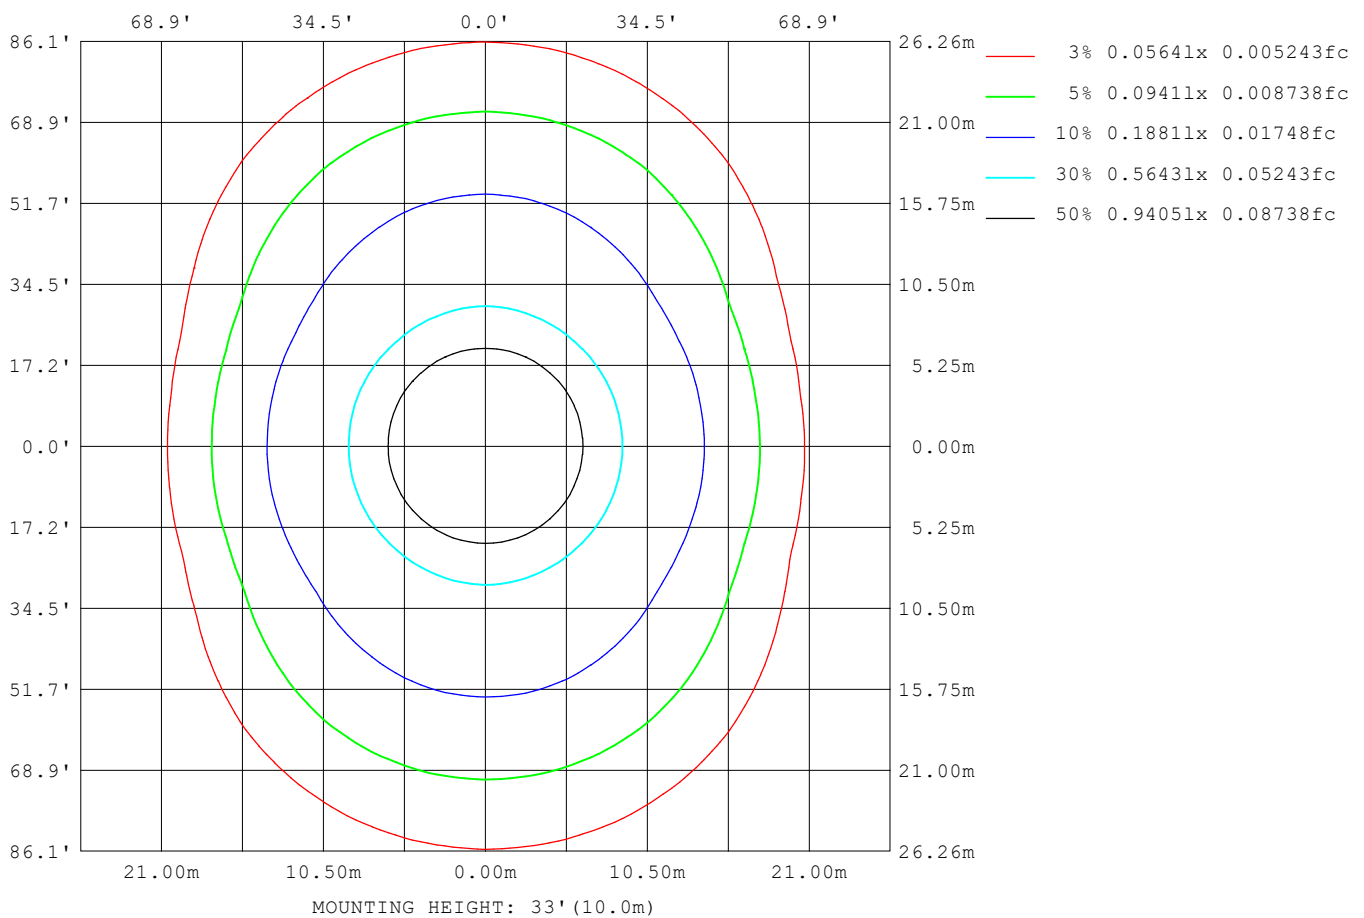

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason Huang
Test Date: 2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity: 65.0%
Test Distance: 13.486m [K=1.0000]
Remarks: --

Planar Illuminance Curve

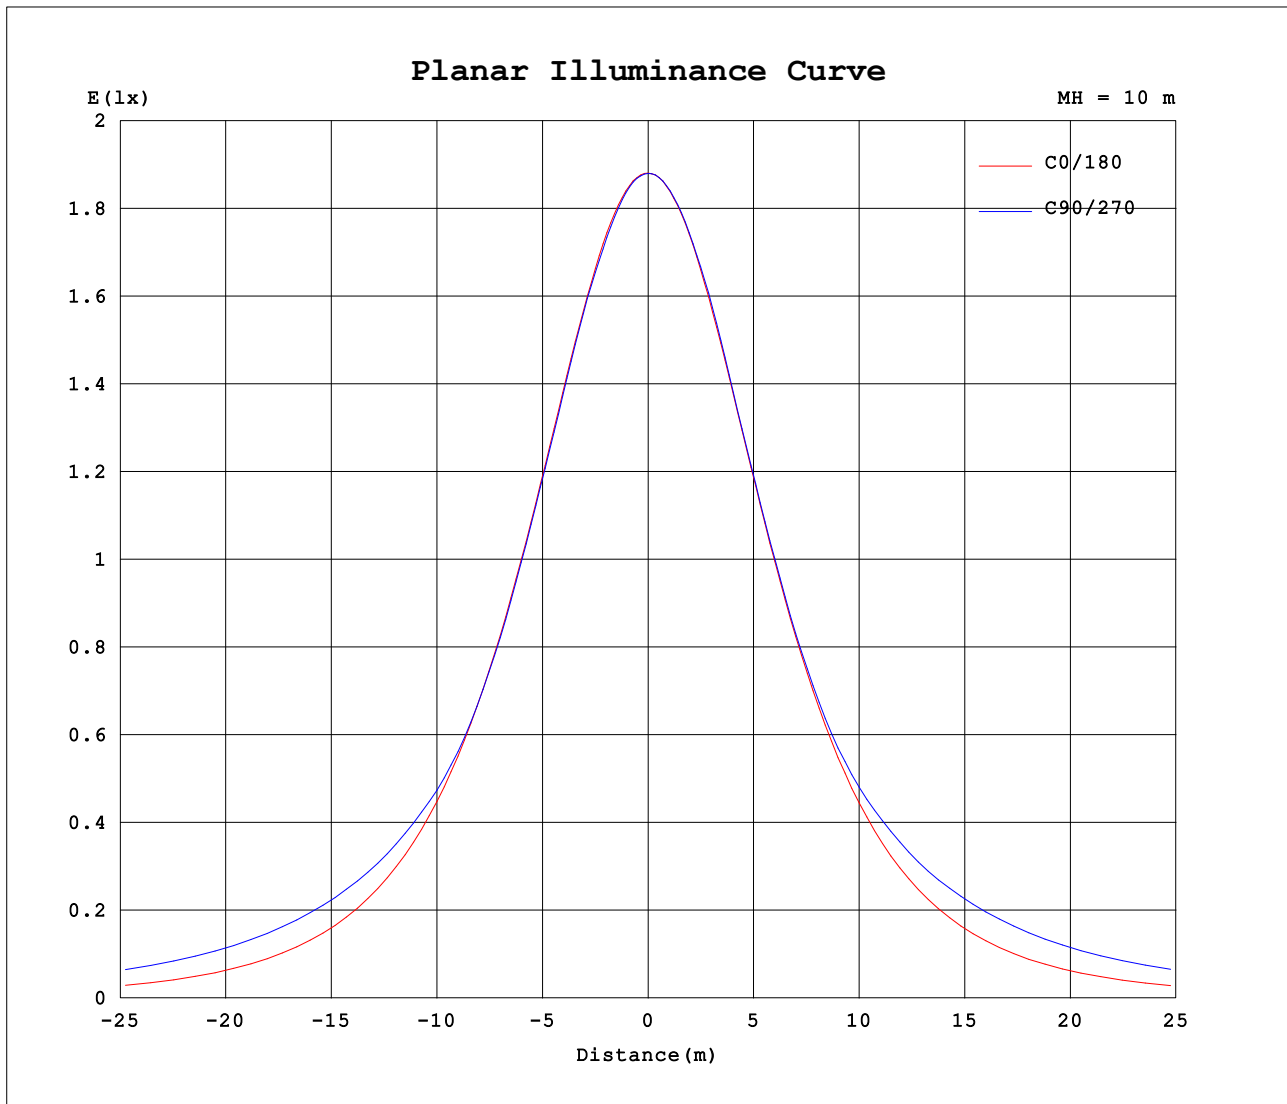

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Jason Huang
Test Date: 2023-03-16

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000H_V1 SYSTEM V2.0.404.7
Humidity: 65.0%
Test Distance: 13.486m [K=1.0000]
Remarks: --