

COUNTERMAX | 24V RECESSED/SURFACE LED CHANNEL

UCL24-88921 | UCL24-88922 | UCL24-88923 | UCL24-88924 | UCL24-88928

- Includes 39" of wire
- 2 mounting clips included


Job Name : \_\_\_\_\_  
Job Type : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Comments : \_\_\_\_\_



ACCESSORIES




MSC8924V6P-WT  
\*Sold Separately  
6 Port Hub (24V)



SWT898-2460WT  
\*Sold Separately  
24V 60W Driver  
& Dimmer Switch

MEASUREMENTS

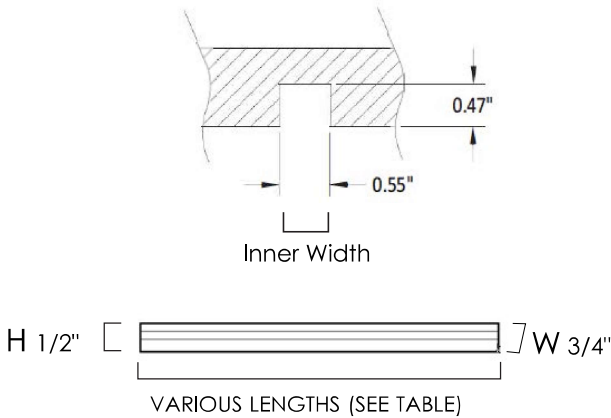

MODEL	LENGHTS	LAMPING BULB TYPE	COL TEMP.	VOLTAGE INPUT	LUMENS	
					RATED	DELIVERED
UCL24-88921	12"	1 x 3W Integrated LED, (3W Total)	3000K	24V	300	150
UCL24-88922	24"	1 x 6W Integrated LED, (6W Total)	3000K	24V	600	370
UCL24-88923	36"	1 x 9W Integrated LED, (9W Total)	3000K	24V	900	570
UCL24-88924	48"	1 x 12W Integrated LED, (12W Total)	3000K	24V	1200	760
UCL24-88928	94"	1 x 23W Integrated LED, (23W Total)	3000K	24V	2300	1470

FINISH

Brushed Aluminum (AL)

MATERIAL

Aluminum

RATINGS

cETLus  
Dry Location



ADDITIONAL

INSTALL UP/DOWN: Up/Down  
RATED LIFE 35000 Hours  
OPERATING TEMPERATURE:  
-20°C (-4°F), 40°C (104°F)

Always consult a qualified electrician before installing any lighting product.



WESTERN DISTRIBUTION CENTER (HEADQUARTER)  
253 NORTH VINELAND AVE | CITY OF INDUSTRY, CA 91746  
EASTERN DISTRIBUTION CENTER  
101 GARDNER PARK | PEACHTREE CITY, GA 30269  
P. 626.956.4200 | F. 626.956.4225 | maximlighting.com