




VINE SERIES PENDANT

DESIGNER
CAINE HEINTZMAN

INSTRUCTIONS



SCAN HERE

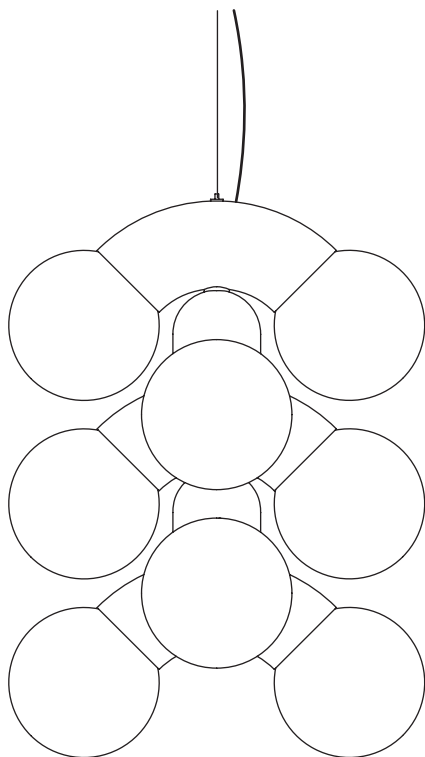

NORTH AMERICA



a-n-d.com

INSTALLATION NOTES

The luminaire is powered by line voltage and is rated for inputs between 110-130VAC.

Two people are recommended to install the Vine Pendant; one to gently support the luminaire while the other makes the electrical connections and mechanical connections to the ceiling.

For questions regarding installation, please email **info@a-n-d.com**



CARE INSTRUCTIONS

Always wear clean gloves when handling the luminaire. Clean finished surfaces with a soft, lint-free cloth. Clean glass with a clean cloth and glass cleaner. When changing light bulb, turn fixture off and allow to cool to room temperature prior to removing glass.

For replacement parts contact A-N-D directly.

Replace Lamping with G9 LED lamps. Never exceed the recommended wattage and voltage (MAX 5W,130V), as doing so may damage the luminaire or cause a fire.



WARNING


The luminaire must be installed by a qualified electrician in a dry indoor location.

Failure to meet any or all of these criteria will not only damage the luminaire, but will void both the warranty and all of its certifications.

COMPONENTS




- ① WIRE NUT (2)
- ② T-BAR
- ③ #8-32 SCREW (2)
- ④ CANOPY
- ⑤ CABLE GRIPPER
- ⑥ STRAIN RELIEF
- ⑦ O-RING (4)
- ⑧ SUSPENSION CABLE
- ⑨ ELECTRICAL CORD
- ⑩ STACKED BENT SECTIONS (3-9)
- ⑪ GLOBE HOLDER (6-18)
- ⑫ G9 LAMP (6-18)
- ⑬ GLASS GLOBE (6-18)

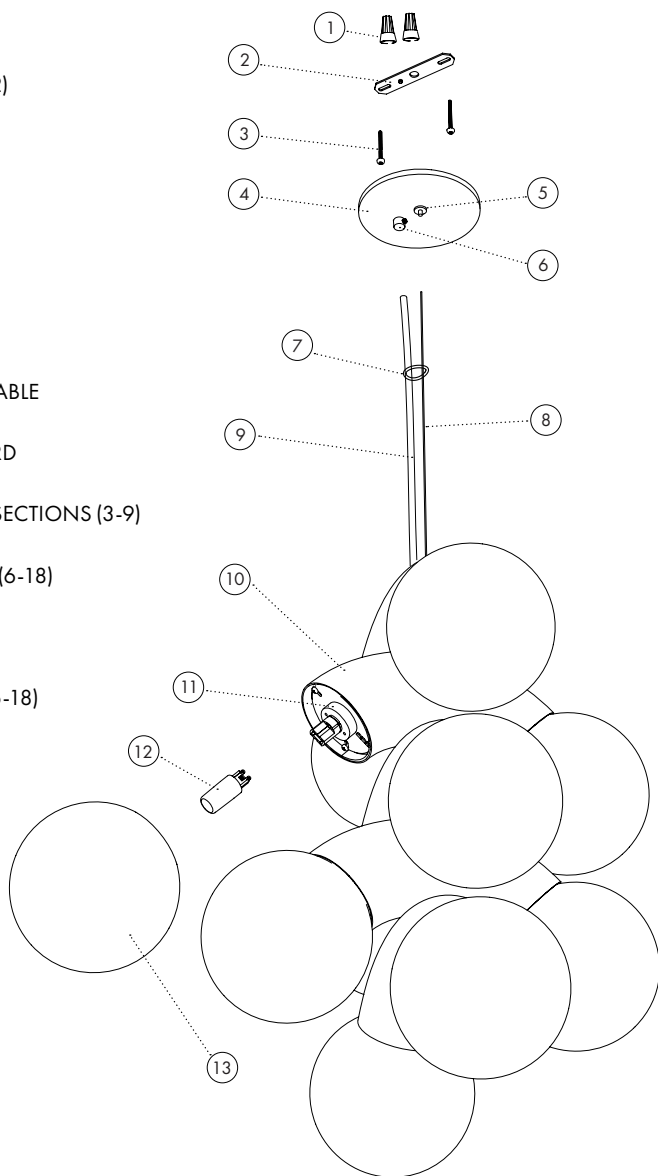


VINE OPTIONS

The Vine Pendant series
is available in 4 sizes:

VINE 3




VINE 5

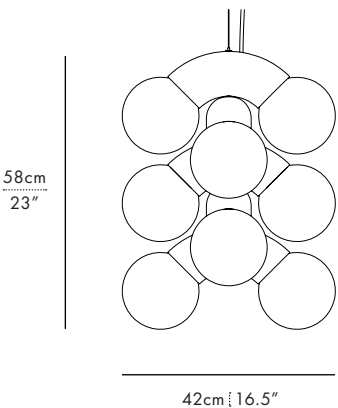

VINE 7


76cm
30"

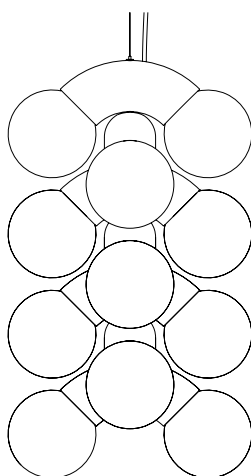

42cm | 16.5"

VINE 9

94cm
37"

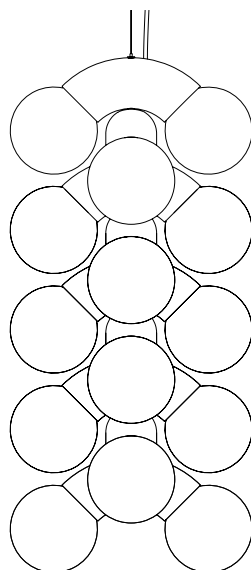

42cm | 16.5"

PREPARATION

STEP 1

Determine the drop height of the fixture and trim excess cable.

Suspension cable length:


Add an extra 15cm/6" to the required length. This allows for adjustment at the end.

Electrical cord length:

Add an extra 30cm/12" to the drop height. This allows for slack, and electrical connections inside the canopy.

⚠ Caution!

The electrical cord must not bear any weight.

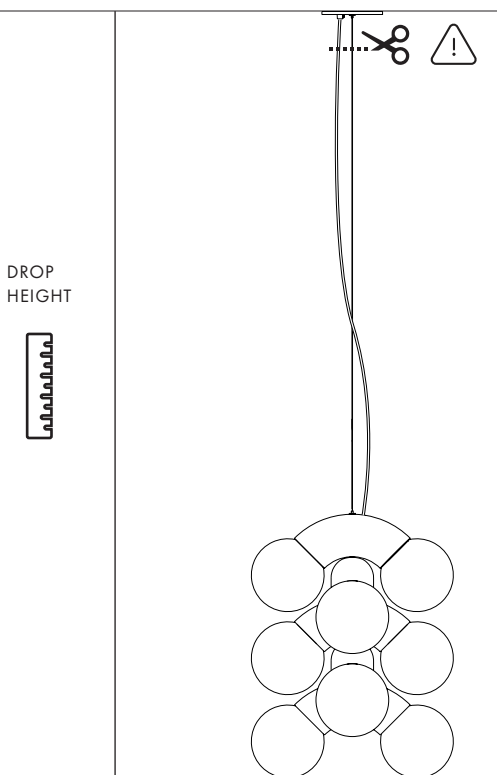

INSTALLATION




STEP 2

Mount the T-bar to the junction box.

Use the provided #8-32 screws..

Caution!

Ensure that the power is disconnected at the breaker.

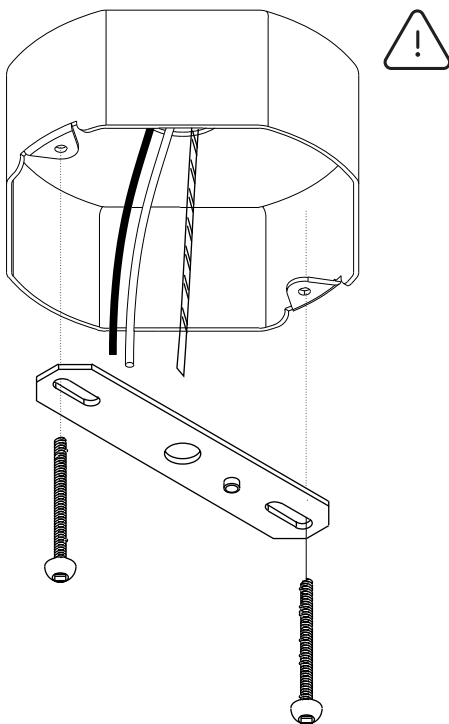


INSTALLATION

STEP 3

Pull the electrical cord through the strain relief and the suspension cable through the cable gripper.

Secure the electrical cord in position with the screw on the strain relief.

If needed, release the suspension cable from the cable gripper by pushing the center pin inwards while pulling the cable backwards.

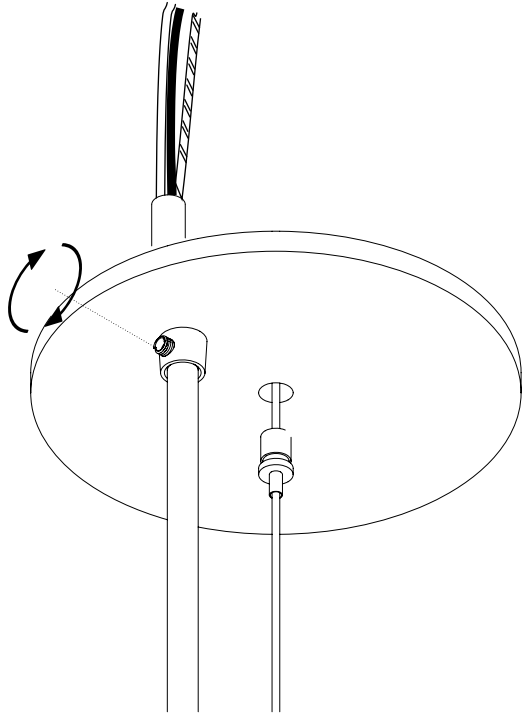


STEP 4

Connect the luminaire to input power. Connect ground.

Black/brown wire = **Line** (L)

White/blue wire = **Neutral** (N)

Green screw = **Ground** (G)

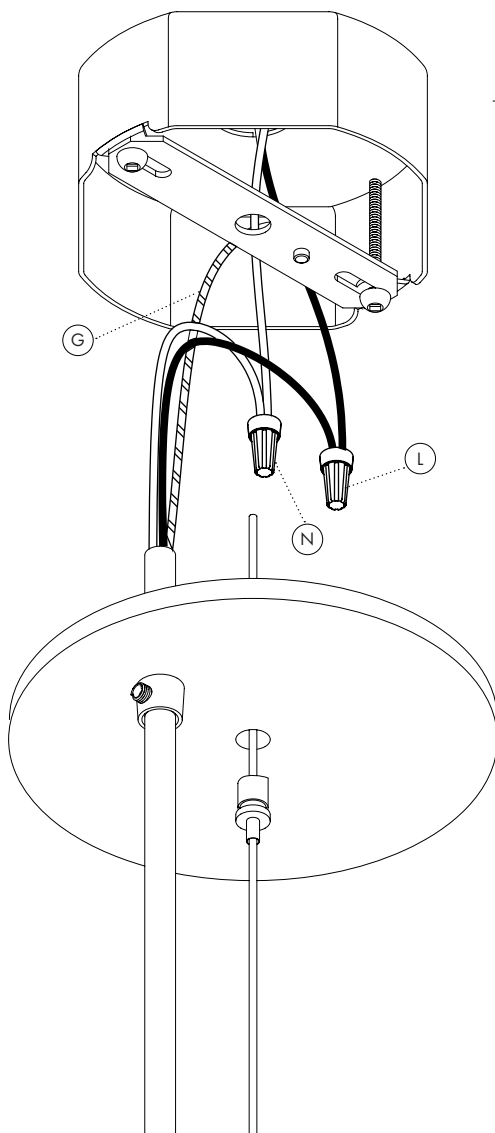


INSTALLATION

STEP 5

Mount the canopy to the T-Bar.

Thread the cable gripper into the center hole on the T-bar.


Spin clockwise until the canopy sits flush on the ceiling.

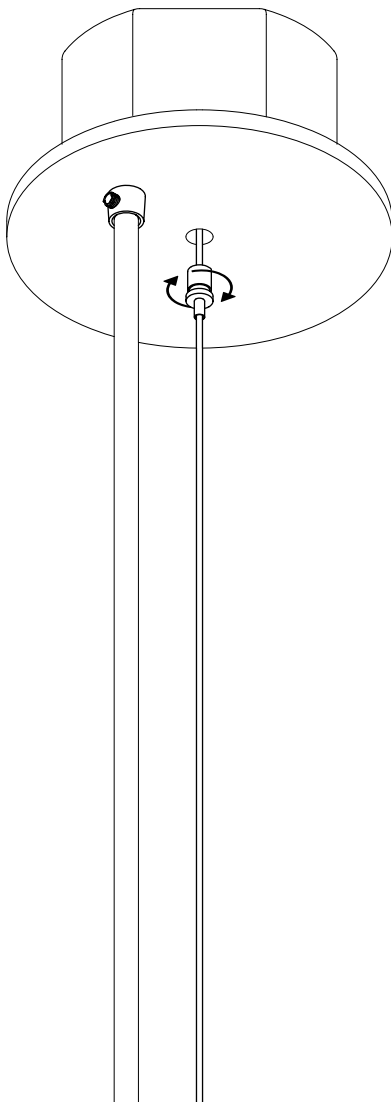

STEP 6

Install the G9 lamps into each socket.

A 'click' will indicate proper installation of the lamp into the socket.

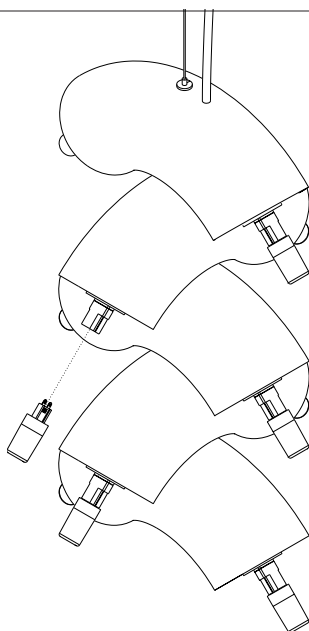

STEP 7


Install the glass globes.

Spin the glass globes clockwise onto the globe holders. Stop spinning the glass once it touches the edge of the luminaire.

⚠ Caution!

Take care not to over tighten the glass, it may cause a crack.

For replacement parts contact A-N-D directly.

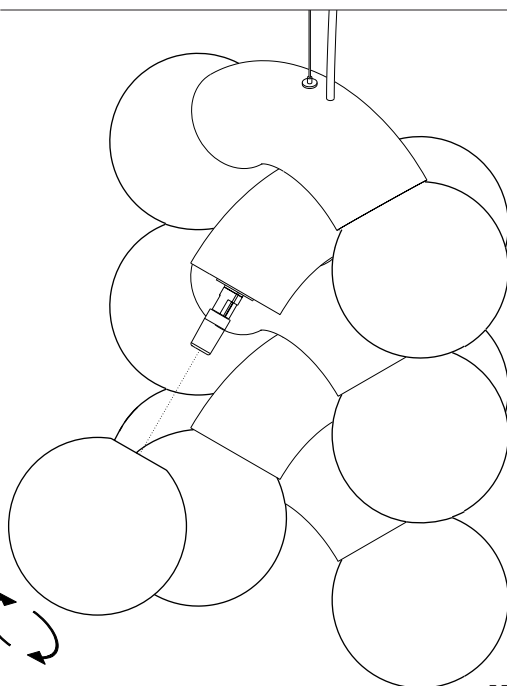



For support, please contact:

info@a-n-d.com

+1 604 563 6938

A-N-D

1951 Franklin St,
Vancouver, BC
Canada V5L 0C7

a-n-d.com