
VALE — P

PENDANT

A—N—D

Designed by Caine Heintzman — 2019



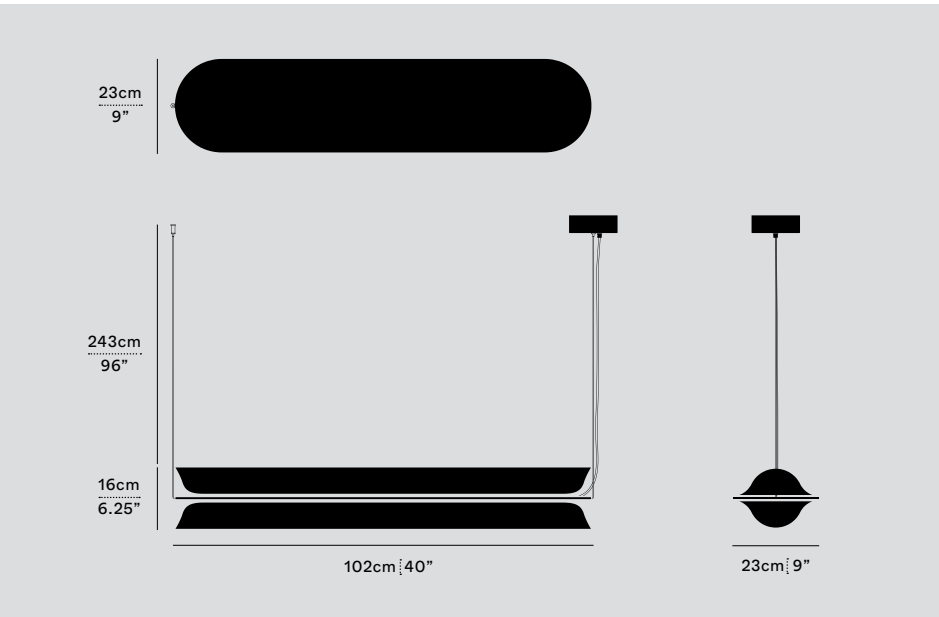

VAL-1-P-ANT-27-ELV-120 — A-N-D.COM

TYPE
Pendant

DIMENSIONS
102cm x 16cm x 23cm / 40” x 6.25” x 9”

3D MODELS ON A-N-D.COM
REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS
Application: dry indoor location only

MANUFACTURED
Canada

MATERIALS
Aluminum, Acrylic

TECHNICAL INFORMATION
Input Voltage
110–120V, 220–240V, 110–277V

Lamping
Integral 20W 24V DC LED
CRI 90+, 50,000 hours

Lumens
1388 lumens delivered

Controls
Phase Dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS
Warm — Neutral
2700K 3000K 3500K 4100K

DIM TO WARM
Warm / DIM - — Bright / DIM +
1800K — 3000K

CANOPY OPTIONS
Standard
Ø 11cm x 4cm / Ø 4.5” x 1.5” enclosure with surface mounted driver (1), anchor (2)

*Refer to Accessories for Micro Canopy, Remote Power Supply, and other options

FRAME FINISHES
Anthracite (ANT) — Silica (SIL) — Rust (RST)

LENS FINISH
Clear (CLR)

For custom finishes, please inquire.

SERIES	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN
VAL	☐ 1	P	☐ ANT (ANTHRACITE) ☐ SIL (SILICA) ☐ RST (RUST)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL**	☐ 120 ☐ 230 ☐ 277*

**DALI standard canopy Ø6”
*277 only available with 010

Modified: 03/25/26
©2026 ANDSTUDIO DESIGNS INC.
All Rights Reserved.

1951 Franklin St
Vancouver, B.C.
Canada V5L 0C7


Sankt Peders Stræde
45B, 1453 Copenhagen
Denmark

+1 604 563 6938
INFO@A-N-D.COM
A-N-D.COM


POSSIBLE ORIENTATIONS

The Vale suspends horizontally on an x- or y-axis, or vertically. The following diagrams show Vale's possible orientations.

HORIZONTAL, X-AXIS



HORIZONTAL, Y-AXIS



VERTICAL



Modified: 03/25/26
©2026 ANDSTUDIO DESIGNS INC.
All Rights Reserved.

1951 Franklin St
Vancouver, B.C.
Canada V5L 0C7

Sankt Peders Stræde
45B, 1453 Copenhagen
Denmark

+1 604 563 6938
INFO@A-N-D.COM
A-N-D.COM