


PIPELINE 125 – C/W

CEILING/WALL / DESIGNER: CAINE HEINTZMAN / 2021

A-N-D

MANUFACTURED IN CANADA

A-N-D.COM

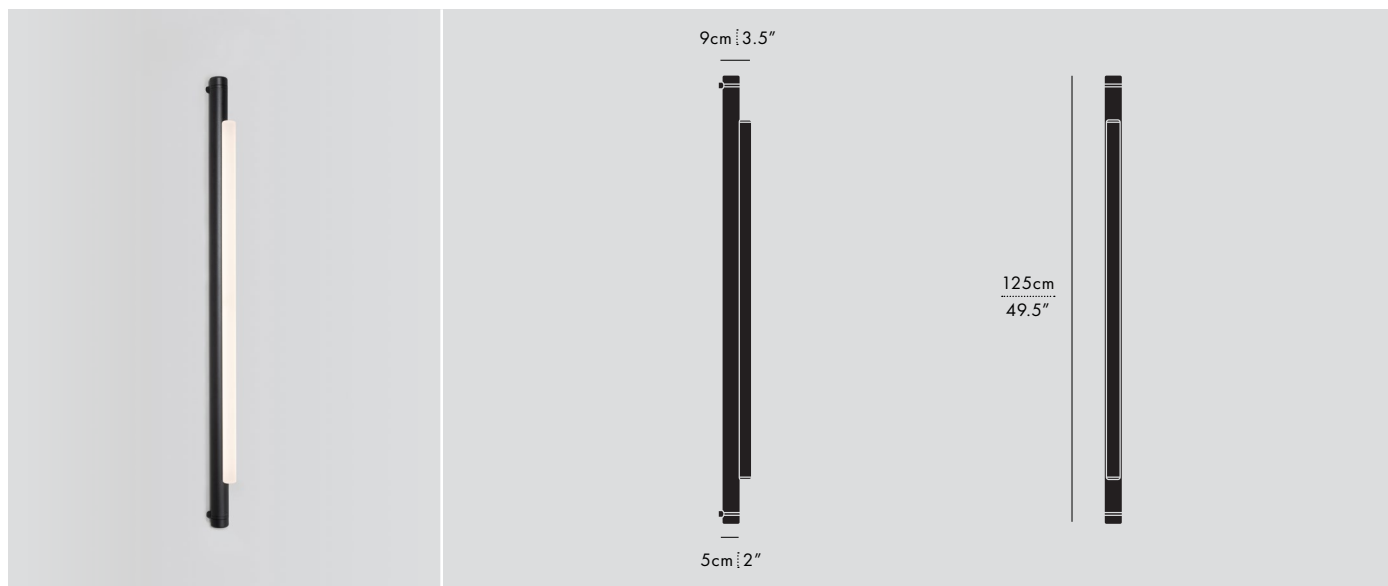

PIP-125-CW-BK-27-ELV-120

VISIT [A-N-D.COM](https://www.a-n-d.com) FOR 3D MODELS INCLUDING REVIT/IES.

DESCRIPTION

Space efficient, the surface mounted Pipeline provides accent lighting while becoming an integral element of the environment it is set in.

TYPE

Ceiling/Wall

DIMENSIONS

- Luminaire: 125 x 9 x 5cm / 49.5" x 3.5" x 2"

POWER TRIM OPTIONS

- Trimless (Mud-in or surface mount, remote power supply)
 - Cover plate (Junction box, 4.5" x 4.5")
- * SEE INSTALL INSTRUCTIONS

CERTIFICATIONS




* APPLICATION: DRY INDOOR LOCATION ONLY


TECHNICAL INFORMATION

- Input Voltage: 110–120V, 220–240V, 110–277V
- Lamping: Integral 17W 24V DC LED CRI 90+, 50,000 hours
- Lumens: 716 lumens delivered
- Power Supply: Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MATERIALS

- Aluminum
- Acrylic

FINISHES



BLACK "BK"



WHITE "WH"



BRASS "BR"



COPPER "CP"



CHROME "CH"



FOR CUSTOM FINISHES, PLEASE INQUIRE.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP	125	CW	<input type="checkbox"/> BK (BLACK)	<input type="checkbox"/> BK (BLACK)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120
			<input type="checkbox"/> WH (WHITE)	<input type="checkbox"/> WH (WHITE)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> 010	<input type="checkbox"/> 230
				<input type="checkbox"/> BR (BRASS)	<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DAL	<input type="checkbox"/> 277*
			<input type="checkbox"/> BR (BRASS)	<input type="checkbox"/> CP (COPPER)	<input type="checkbox"/> 41 (4100K)		
			<input type="checkbox"/> CP (COPPER)	<input type="checkbox"/> CH (CHROME)	<input type="checkbox"/> DW (DIM TO WARM)		
			<input type="checkbox"/> CH (CHROME)				

*277 ONLY AVAILABLE WITH 010

