


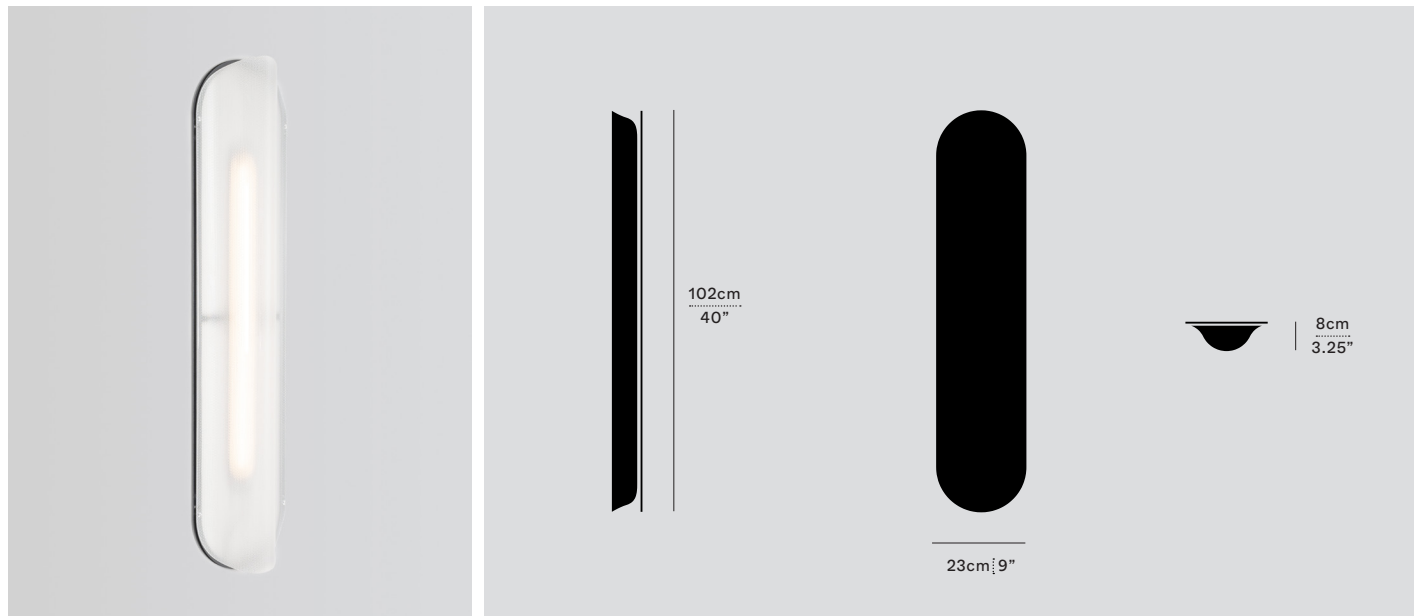

VAL-1-CW-ANT-27-ELV-120

A-N-D.COM

TYPE

Ceiling/Wall

DIMENSIONS

102cm x 8cm x 23cm / 40" x 3.25" x 9"

POWER OPTIONS NORTH AMERICA

- Coverplate
- Mounts to standard depth octagon box
- Remote power supply for multiple Vale arrangements

POWER OPTIONS WORLD MARKET

- Surface mounted
- Remote power supply only

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

MATERIALS

Aluminum, Acrylic

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

Integral 10W 24V DC LED
CRI 90+, 50,000 hours


Lumens

694 lumens delivered


Controls

Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS




DIM TO WARM





MANUFACTURED

Canada

FRAME FINISHES

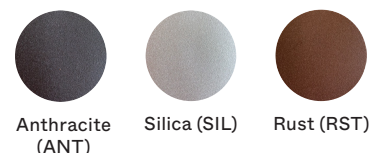

LENS FINISH



CERTIFICATIONS



Application: dry indoor location only

SERIES	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN
VAL	☐ 1	CW	☐ ANT (ANTHRACITE) ☐ SIL (SILICA) ☐ RST (RUST)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL	☐ 120 ☐ 230 ☐ 277*

*277 only available with 010

POSSIBLE ORIENTATIONS

The Vale Ceiling/Wall suspends horizontally or vertically on the ceiling or wall.

