


PACE 28 — P

PENDANT

A—N—D

Designed by Caine Heintzman

2025

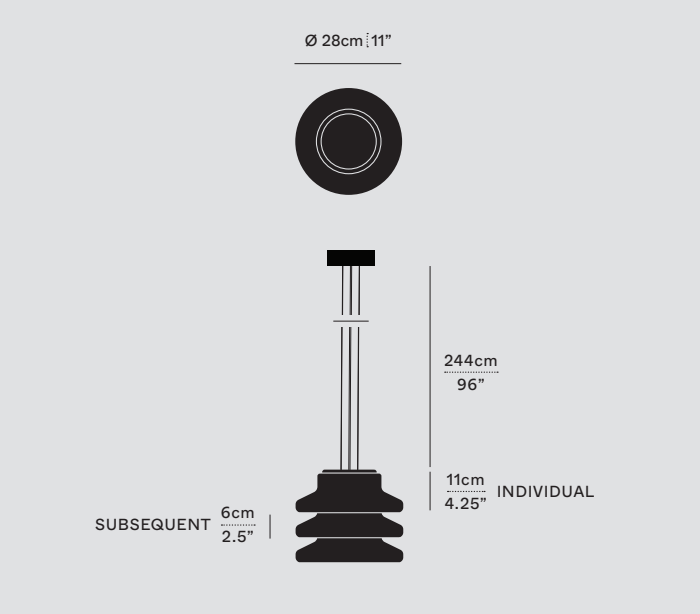

PAC-28-3-P-TRN-DW-ELV-120

A-N-D.COM

TYPE

Pendant

MATERIALS

Glass, Aluminum

MANUFACTURED

Canada

DIMENSIONS

Individual: Ø 28cm x 11cm / Ø 11" x 4.25"

Subsequent: Ø 28cm x 6cm / Ø 11" x 2.5"

Adjustable drop length

244cm / 96" — Custom length available

Weights

1: 4kg / 8lbs	9: 13.5kg / 30lbs
2: 5kg / 11lbs	12: 17kg / 38lbs
3: 6kg / 14lbs	15: 21kg / 46.5lbs
6: 10kg / 22lbs	

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

24V DC LED, CRI 90+, 50,000 hours

1: 8W	9: 36W
2: 12W	12: 46W
3: 15W	15: 56W
6: 25W	

Controls

Phase dimming, 0–10V, DALI

FINISHES



Float (FLT) Translucent (TRN) Umber (UMB)




For custom finishes, please inquire.

3D MODELS

REVIT, IES, DWG, 3DS, Rhino, Sketchup

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



CERTIFICATIONS



Application: dry indoor location only

SERIES	SIZE	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN
PAC	28	<input type="checkbox"/> 1	P	<input type="checkbox"/> FLT (FLOAT)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120
		<input type="checkbox"/> 2		<input type="checkbox"/> TRN (TRANSLUCENT)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> 010	<input type="checkbox"/> 230
		<input type="checkbox"/> 3		<input type="checkbox"/> UMB (UMBER)	<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DAL**	<input type="checkbox"/> 277*
		<input type="checkbox"/> 6			<input type="checkbox"/> DW (DIM TO WARM)		
		<input type="checkbox"/> 9					
		<input type="checkbox"/> 12					
		<input type="checkbox"/> 15					

**DALI remote only

*277 only available with 010

PAC-28-1-P PAC-28-2-P PAC-28-3-P PAC-28-6-P PAC-28-9-P PAC-28-12-P PAC-28-15-P

