


PACE 28 — CW

CEILING/WALL

A—N—D

Designed by Caine Heintzman

2025

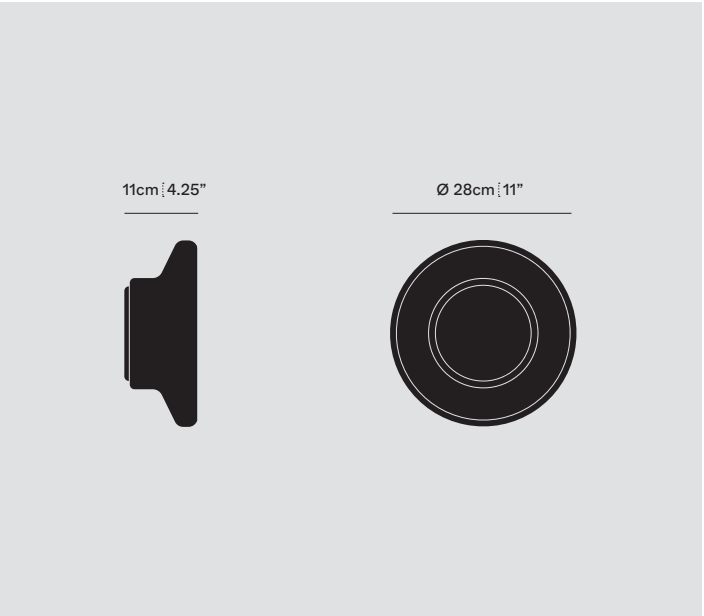

PAC-28-CW-FLT-DW-ELV-120

A-N-D.COM

TYPE

Ceiling/Wall

DIMENSIONS

Ø 28cm x 11cm / Ø 11" x 4.25"

MOUNTING OPTIONS

Driver remote and/or standard junction box

—See install instructions for more details

3D MODELS

REVIT, IES, DWG, 3DS, Rhino, Sketchup

MATERIALS

Glass, Aluminum

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping


Integral 8W 24V DC LED

CRI 90+, 50,000 hours

Controls

Phase dimming, 0–10V, DALI

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

FINISHES



Float (FLT) Translucent (TRN) Umber (UMB)



For custom finishes, please inquire.

CERTIFICATIONS



Application: dry indoor location only

SERIES	SIZE	TYPE	FINISH	CCT	PS	VOLTAGE IN
PAC	28	CW	<input type="checkbox"/> FLT (FLOAT)	<input type="checkbox"/> 27 (2700K)	<input type="checkbox"/> ELV	<input type="checkbox"/> 120
			<input type="checkbox"/> TRN (TRANSLUCENT)	<input type="checkbox"/> 30 (3000K)	<input type="checkbox"/> 010	<input type="checkbox"/> 230
			<input type="checkbox"/> UMB (UMBER)	<input type="checkbox"/> 35 (3500K)	<input type="checkbox"/> DAL**	<input type="checkbox"/> 277*
				<input type="checkbox"/> DW (DIM TO WARM)		

**DALI remote only

*277 only available with 010