

COLUMN 175 — C

A—N—D


CEILING

Designed by Lukas Peet


2024



FLUSH MOUNT

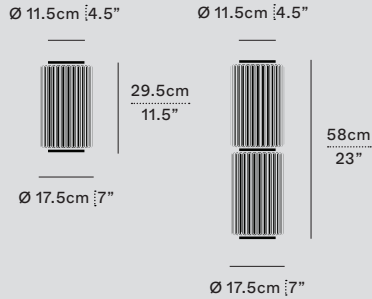

SURFACE MOUNT

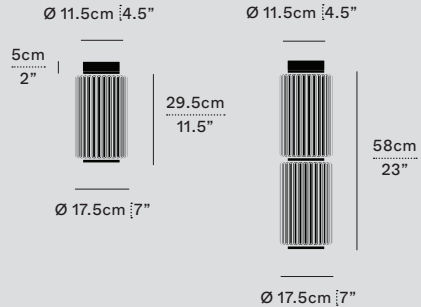

COL-175-1-C-IVO-27-ELV-120-REM

A-N-D.COM

TYPE

Ceiling

DIMENSIONS (PER 1 UNIT)

Ø 17.5cm x 29.5cm / Ø 7" x 11.5"

Weight

3.6kg / 7.9lbs

MOUNTING OPTIONS

Flush Mount (remote power supply)

Surface Mount (power supply in canopy)

—See install instructions for more details

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

12W 24V DC LED (PER UNIT)

CRI 90+, 50,000 hours

Lumens


711 lumens delivered (PER UNIT)

Controls

Phase dimming, 0–10V,

DALI (6" canopy or remote)

COLOUR TEMPERATURE OPTIONS



DIM TO WARM

Warm / DIM -

Bright / DIM +



MANUFACTURED

Canada

MATERIALS

Glass, Aluminum

FINISHES



Carbon (CBN)

Ivory (IVO)

Amber (AMB)

SERIES	SIZE	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN	CANOPY
COL	175	<input type="checkbox"/> 1 <input type="checkbox"/> 2	C	<input type="checkbox"/> CBN (CARBON) <input type="checkbox"/> IVO (IVORY) <input type="checkbox"/> AMB (AMBER)	<input type="checkbox"/> 27 (2700K) <input type="checkbox"/> 30 (3000K) <input type="checkbox"/> 35 (3500K) <input type="checkbox"/> DW (DIM TO WARM)	<input type="checkbox"/> ELV <input type="checkbox"/> 010 <input type="checkbox"/> DAL	<input type="checkbox"/> 120 <input type="checkbox"/> 230 <input type="checkbox"/> 277*	<input type="checkbox"/> REM (REMOTE) <input type="checkbox"/> SUR (SURFACE MOUNT)

*277 only available with 010