

COLUMN 300 — C

A—N—D


CEILING

Designed by Lukas Peet


2024



FLUSH MOUNT

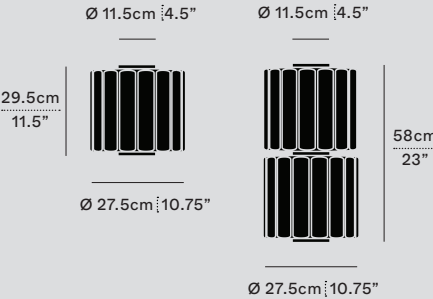

SURFACE MOUNT

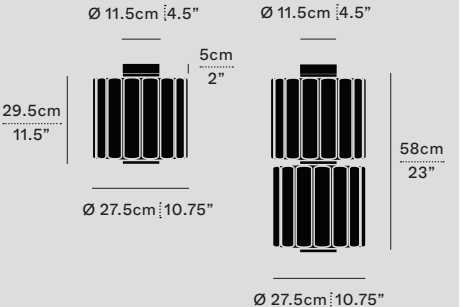

COL-300-1-C-AMB-27-ELV-120-REM

A-N-D.COM

TYPE

Ceiling

DIMENSIONS (PER 1 UNIT)

Ø 27.5cm x 29.5cm / Ø 10.75" x 11.5"

Weight

5.3kg / 11.7lbs

MOUNTING OPTIONS

Flush Mount (remote power supply)
Surface Mount (power supply in canopy)

—See install instructions for more details

3D MODELS ON A-N-D.COM

REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS



Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage

110–120V, 220–240V, 110–277V

Lamping

12W 24V DC LED (PER UNIT)

CRI 90+, 50,000 hours


Lumens

711 lumens delivered (PER UNIT)

Controls

Phase dimming, 0–10V,
DALI (6" canopy or remote)

COLOUR TEMPERATURE OPTIONS



DIM TO WARM



MANUFACTURED

Canada

MATERIALS

Glass, Aluminum

FINISHES



SERIES	SIZE	UNIT	TYPE	FINISH	CCT	PS	VOLTAGE IN	CANOPY
COL	300	<input type="checkbox"/> 1 <input type="checkbox"/> 2	C	<input type="checkbox"/> CBN (CARBON) <input type="checkbox"/> IVO (IVORY) <input type="checkbox"/> AMB (AMBER)	<input type="checkbox"/> 27 (2700K) <input type="checkbox"/> 30 (3000K) <input type="checkbox"/> 35 (3500K) <input type="checkbox"/> DW (DIM TO WARM)	<input type="checkbox"/> ELV <input type="checkbox"/> 010 <input type="checkbox"/> DAL	<input type="checkbox"/> 120 <input type="checkbox"/> 230 <input type="checkbox"/> 277*	<input type="checkbox"/> REM (REMOTE) <input type="checkbox"/> SUR (SURFACE MOUNT)

*277 only available with 010