

PIPELINE V2 125 — P

A—N—D

PENDANT

Designed by Caine Heintzman — 2013

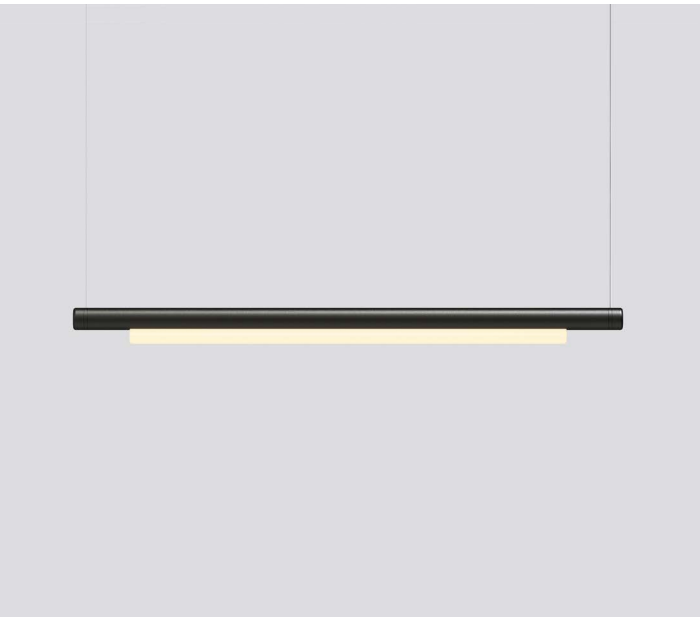

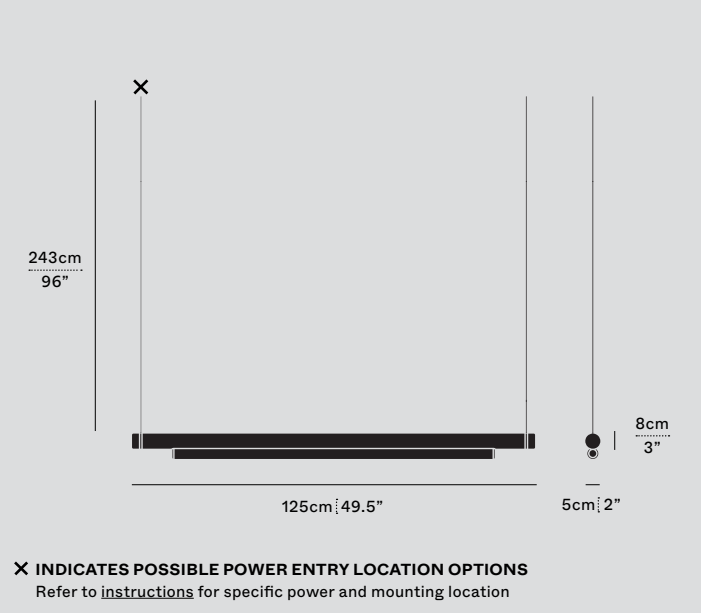

✕ INDICATES POSSIBLE POWER ENTRY LOCATION OPTIONS
Refer to instructions for specific power and mounting location

PIP-V2-125-P-BK-27-ELV-120 — A-N-D.COM

TYPE
Pendant

DIMENSIONS
125cm x 8cm x 5cm / 49.5” x 3” x 2”

Adjustable drop length
243cm / 96” –Custom length available

MATERIALS
Aluminum, Acrylic

MANUFACTURED
Canada

3D MODELS ON A-N-D.COM
REVIT, IES, DWG, 3DS, Rhino, Sketchup

CERTIFICATIONS
cULus CE

Application: dry indoor location only

TECHNICAL INFORMATION

Input Voltage
110–120V, 220–240V, 110–277V

Lamping
Integral 22W 24V DC LED
CRI 90+, 50,000 hours

Lumens
1773 lumens delivered

Controls
Phase dimming, 0-10V, DALI

COLOUR TEMPERATURE OPTIONS

Warm — Neutral

2700K 3000K 3500K 4100K

DIM TO WARM

Warm / DIM - — Bright / DIM +

1800K — 3000K

CANOPY OPTIONS

Standard
Ø 11cm x 4cm / Ø 4.5” x 1.5” encolusure (1), monopoint suspension, surface mount driver (1), anchor (1), and cable swag add-on included (1)

*Refer to Accessories for Micro Canopy, Remote Power Supply, and other options

FINISHES

Black (BK) White (WH) Raw (RA)

Brass (BR) Copper (CP) Chrome (CH)

For custom finishes, please inquire.

SERIES	SIZE	TYPE	BODY FINISH	END CAP/JOINER	CCT	PS	VOLTAGE IN
PIP-V2	125	P	☐ BK (BLACK) ☐ WH (WHITE) ☐ RA (RAW) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ BK (BLACK) ☐ WH (WHITE) ☐ BR (BRASS) ☐ CP (COPPER) ☐ CH (CHROME)	☐ 27 (2700K) ☐ 30 (3000K) ☐ 35 (3500K) ☐ 41 (4100K) ☐ DW (DIM TO WARM)	☐ ELV ☐ 010 ☐ DAL**	☐ 120 ☐ 230 ☐ 277*

**DALI standard canopy Ø6”

*277 only available with 010

Modified: 03/13/26
©2026 ANDSTUDIO DESIGNS INC.
All Rights Reserved.

1951 Franklin St
Vancouver, B.C.
Canada V5L 0C7

Sankt Peders Stræde
45B, 1453 Copenhagen
Denmark

+1 604 563 6938
INFO@A-N-D.COM
A-N-D.COM