


ELLISSE PENDANT TRIPLE

Federico Palazzari

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.

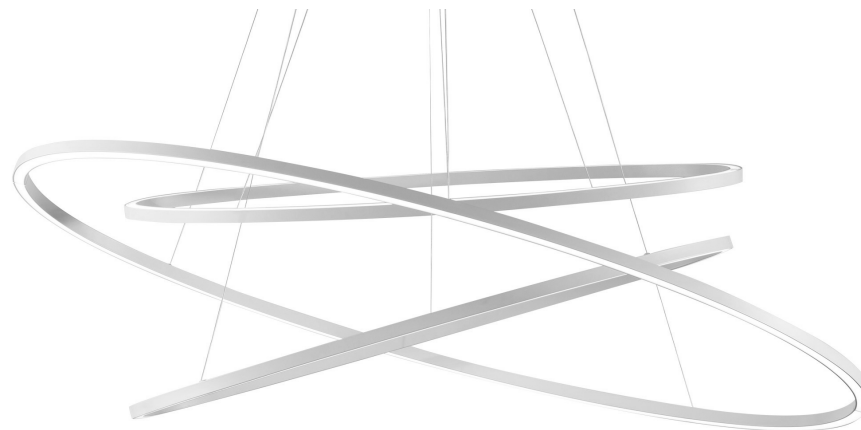

2700K

LAMPING

Source	Linear LED
Total power	70W
Emission	diffused uplight (minor), diffused downlight (major/minor)
Switching	dimnable
Tension	120V
Color temperature	2700K
Luminous flux	1050+1630+1050lm
Typ CRI	85
IP class	20
Dimensions	53.2' x 27.6' x 8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, integral driver dual capability TRIAC- ELV and 0-10V, extra cable on request

Codes

- ELP LW2 57
- ELP LN2 57
- ELP LL2 57
- ELP LO2 57
- ELP LGW 57


Structure

- white
- black
- polished aluminium
- gold painted
- gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs
------------	--

Certificazioni

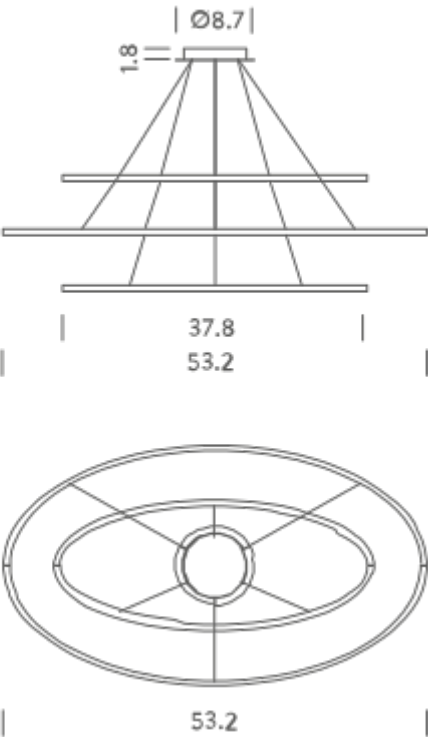

3000K

LAMPING

Source	Linear LED
Total power	70W
Emission	diffused uplight (minor), diffused downlight (major/minor)
Switching	dimnable
Tension	120V
Color temperature	3000K
Luminous flux	1050+1630+1050lm
Typ CRI	85
IP class	20
Dimensions	53.2' x 27.6' x 8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, integral driver dual capability TRIAC- ELV and 0-10V, extra cable on request

Codes

- ELP LWW 57
- ELP LNW 57
- ELP LLW 57
- ELP LOW 57

Structure

- white
- black
- polished aluminium
- gold painted

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Gross weight: 16.5 lbs
------------	--

Certificazioni

