

KEPLER MINOR

Arihiro Miyake

The Kepler collection is made of painted extruded aluminium, whose continuous line is obtained through a three-dimensional manufacturing process developed by Nemo. Designed on the basis of the mathematical principle of the Möbius strip. Diffuser in opaque technopolymer.



UPLIGHT 2700K

LAMPING

Source	linear LED
Total power	60W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	2700K
Luminous flux	3500lm
Typ CRI	85
IP class	20
Dimensions	33' x 33' x 13.7'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V

Codes

KEM LWW 53
KEM LNN 53
KEM LOW 53


Structure

white
black
gold

PACKAGE

Package 01	Dimension: 35.4 x 35.4 x 17.7 inches / Gross weight: 24.3 lbs
------------	---

Certificazioni

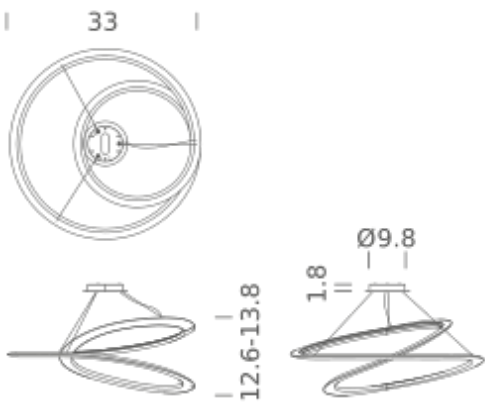

DOWNLIGHT 2700K

LAMPING

Source	linear LED
Total power	60W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	2700K
Luminous flux	3500lm
Typ CRI	85
IP class	20
Dimensions	33' x 33' x 13.7'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V

Codes

KEM LWW 54
KEM LNN 54
KEM LOW 54


Structure

white
black
gold

PACKAGE

Package 01	Dimension: 35.4 x 35.4 x 17.7 inches / Gross weight: 24.3 lbs
------------	---

Certificazioni

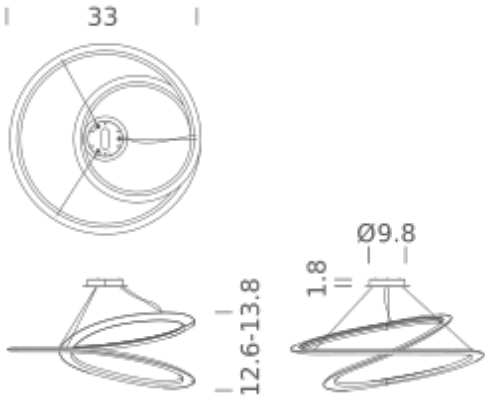

UPLIGHT 3000K

LAMPING

Source	linear LED
Total power	60W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	3000K
Luminous flux	3500lm
Typ CRI	85
IP class	20
Dimensions	33' x 33' x 13.7'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V

Codes

KEM LWW 51
KEM LNN 51
KEM LOW 51


Structure

white
black
gold

PACKAGE

Package 01	Dimension: 35.4 x 35.4 x 17.7 inches / Gross weight: 24.3 lbs
------------	---

Certificazioni

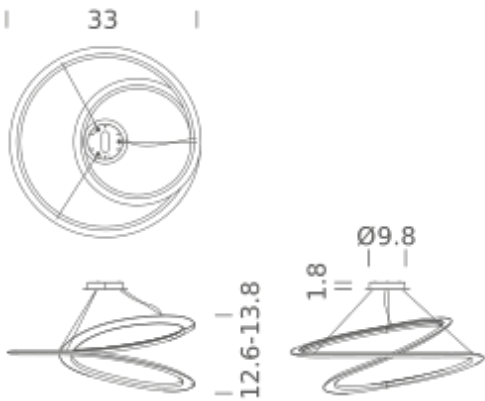

DOWNLIGHT 3000K

LAMPING

Source	linear LED
Total power	60W
Emission	diffused
Switching	dimmable
Tension	120V
Color temperature	3000K
Luminous flux	3500lm
Typ CRI	85
IP class	20
Dimensions	33' x 33' x 13.7'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, extra cable on request, integral driver dual capability TRIAC-ELV and 0-10V

Codes

KEM LWW 52
KEM LNN 52
KEM LOW 52

Structure

white
black
gold

PACKAGE

Package 01	Dimension: 35.4 x 35.4 x 17.7 inches / Gross weight: 24.3 lbs
------------	---

Certificazioni

