


ZIRKOL – O

ZIRKOL -O is a family of oval suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version with high flux and different colour temperatures.

Driver and dimmer interface included

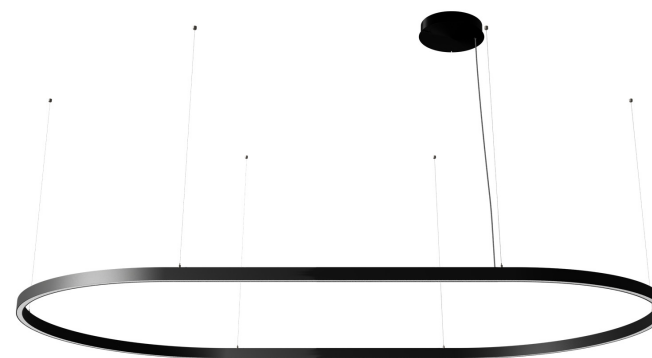

OVAL 78.7"X39.4" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	74W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	2700K
Luminous flux	4282lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRO16A20G15DBO
 UZRO16A20G15DNE
 UZRO16A20G15DOR

Structure

white
 black
 gold

Certificazioni

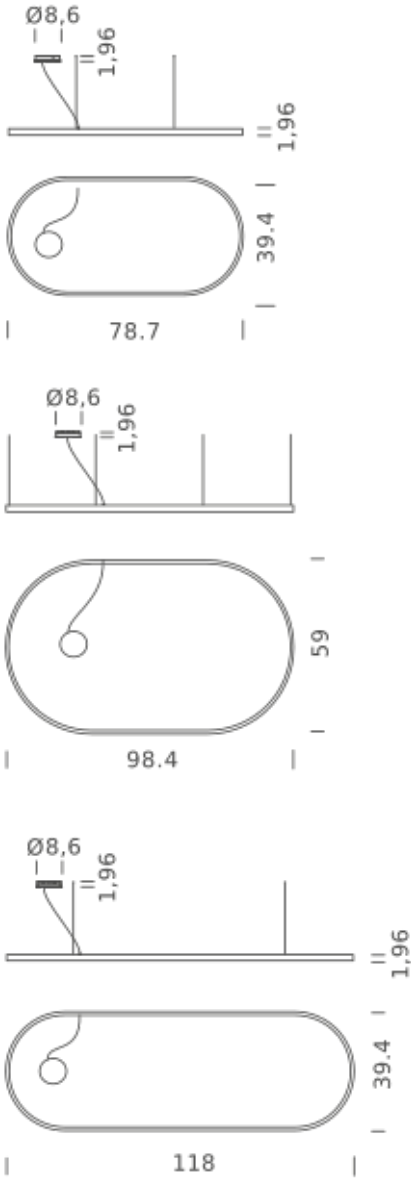

OVAL 78.7"X39.4" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	74W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	3000K
Luminous flux	4533lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRO16A20G15WBO
 UZRO16A20G15WNE
 UZRO16A20G15WOR

Structure

white
 black
 gold

Certificazioni

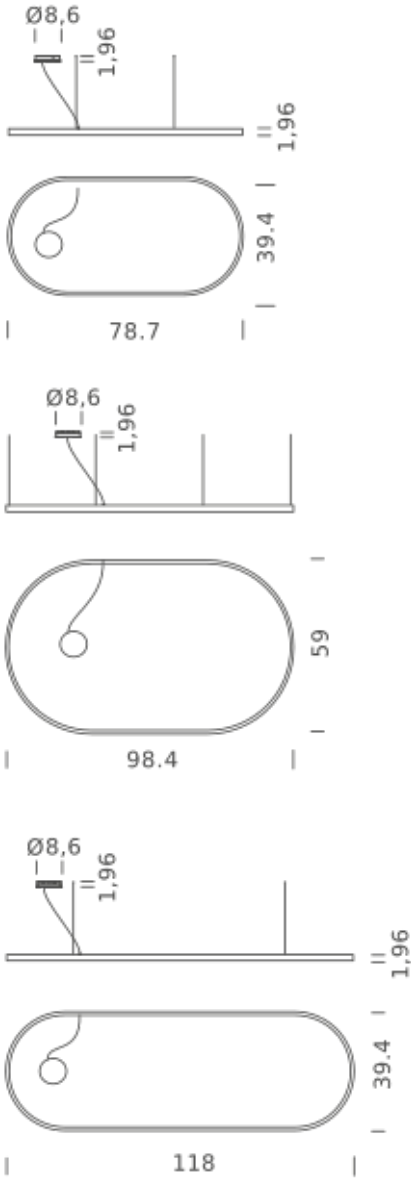

OVAL 78.7"X39.4" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	74W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	4000K
Luminous flux	5037lm
Typ CRI	90
IP class	IP40
Dimensions	78.7"x39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRO16A20G15NBO
UZRO16A20G15NNE
UZRO16A20G15NOR

Structure

white
black
gold

Certificazioni

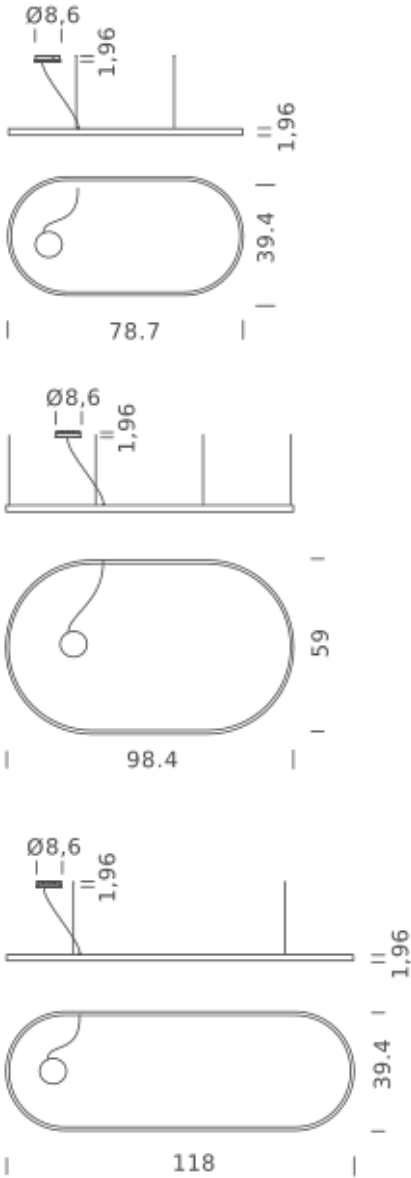

OVAL 118"X39.4" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	98W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	2700K
Luminous flux	5948lm
Typ CRI	90
IP class	IP40
Dimensions	118"x39.4"x1.9"
Materials	aluminum
Notes	<p>RAL 9005 black RAL 9016 white shipped assembled </p> <p>round canopy with 1 x driver WALIMLED100/24 1 x</p> <p>dimmer interface WDIMDALIHP 1 x electrical cable</p> <p>16.4' 4 x adjustable metal cable length 9.8' (including</p> <p>ceiling attachments)</p>


Codes

UZRO16A30G15DBO
UZRO16A30G15DNE
UZRO16A30G15DOR

Structure

white
black
gold

Certificazioni

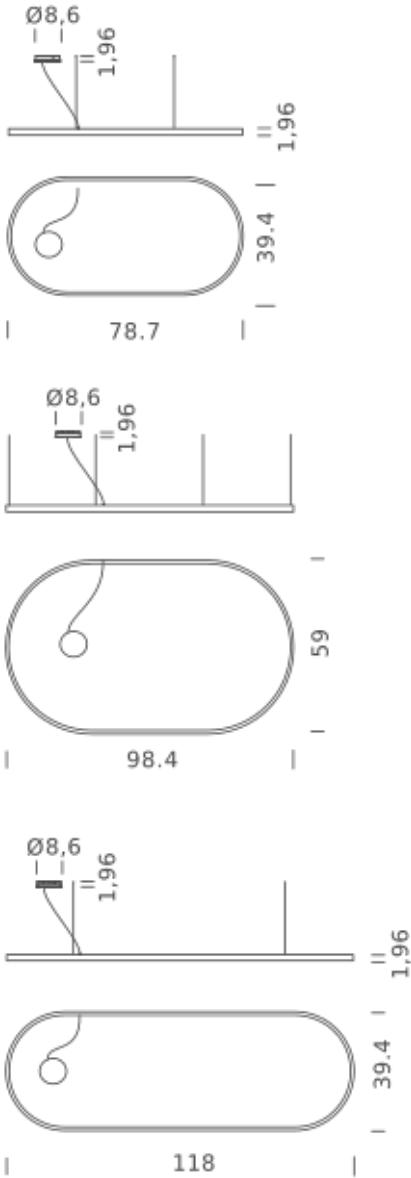

OVAL 118"X39.4" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	98W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	3000K
Luminous flux	6297lm
Typ CRI	90
IP class	IP40
Dimensions	118"x39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRO16A30G15WBO
UZRO16A30G15WNE
UZRO16A30G15WOR

Structure

white
black
gold

Certificazioni

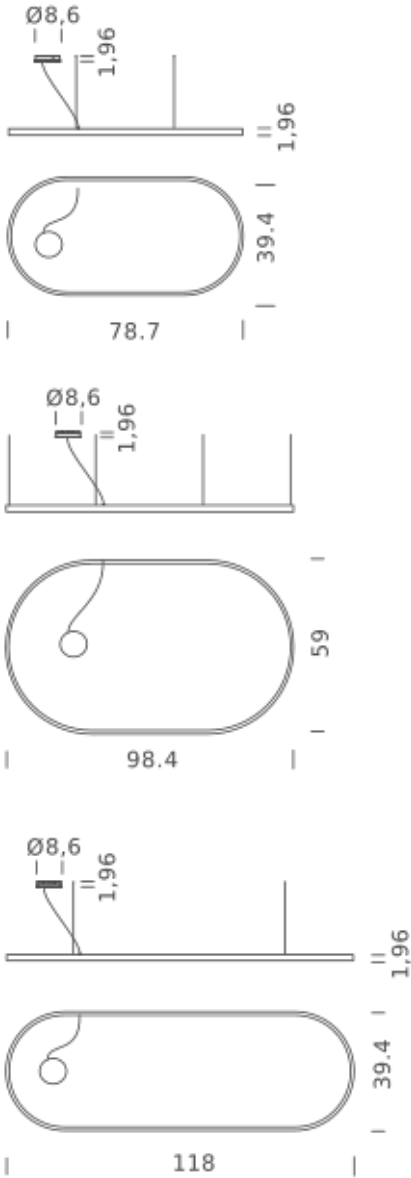

OVAL 118"X39.4" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	98W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	4000K
Luminous flux	6997lm
Typ CRI	90
IP class	IP40
Dimensions	118"x39.4"x1.9"
Materials	aluminum
Notes	RAL 9005 black RAL 9016 white shipped assembled round canopy with 1 x driver WALIMLED100/24 1 x dimmer interface WDIMDALIHP 1 x electrical cable 16.4' 4 x adjustable metal cable length 9.8' (including ceiling attachments)


Codes

UZRO16A30G15NBO
UZRO16A30G15NNE
UZRO16A30G15NOR

Structure

white
black
gold

Certificazioni

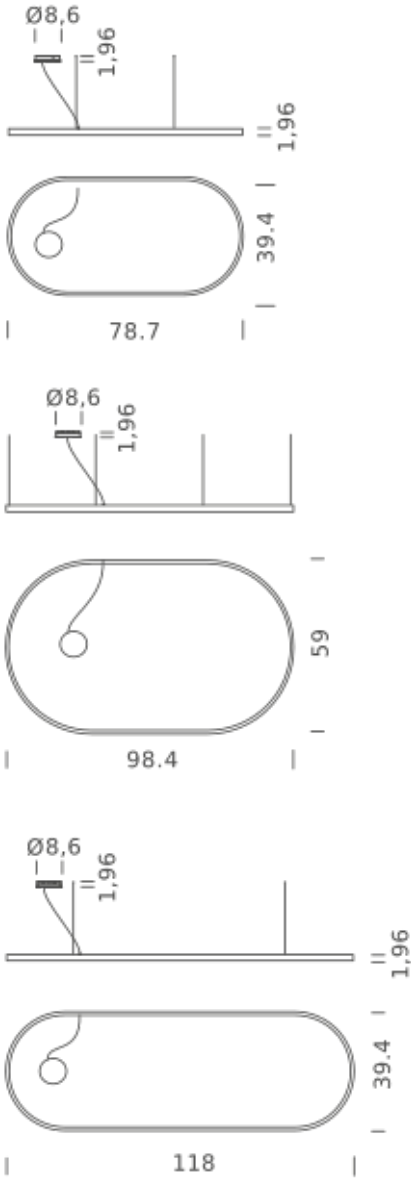

OVAL 98.4"X59" | DOWNLIGHT - 2700K

LAMPING

Source	linear LED
Total power	97W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	2700K
Luminous flux	5589lm
Typ CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	aluminum
Notes	<p>RAL 9005 black RAL 9016 white shipped in 4 pieces </p> <p>round canopy with 1 x driver WALIMLED100/24 1 x</p> <p>dimmer interface WDIMDALIHP 1 x electrical cable</p> <p>16.4' 6 x adjustable metal cable length 9.8' (including</p> <p>ceiling attachments)</p>


Codes

UZRO16B25G15DBO
UZRO16B25G15DNE
UZRO16B25G15DOR

Structure

white
black
gold

Certificazioni

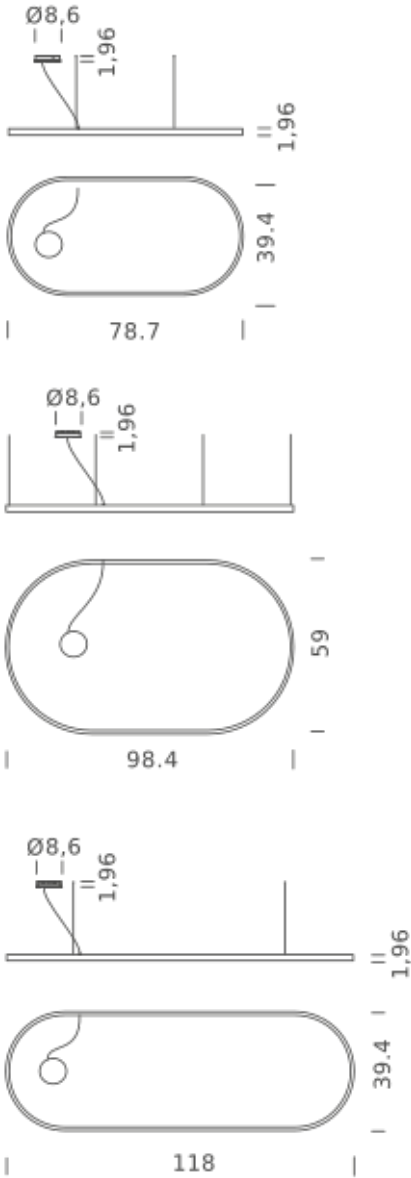

OVAL 98.4"X59" | DOWNLIGHT - 3000K

LAMPING

Source	linear LED
Total power	97W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	3000K
Luminous flux	5918lm
Typ CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	aluminum
Notes	<p>RAL 9005 black RAL 9016 white shipped in 4 pieces </p> <p>round canopy with 1 x driver WALIMLED100/24 1 x</p> <p>dimmer interface WDIMDALIHP 1 x electrical cable</p> <p>16.4' 6 x adjustable metal cable length 9.8' (including</p> <p>ceiling attachments)</p>


Codes

UZRO16B25G15WBO
UZRO16B25G15WNE
UZRO16B25G15WOR

Structure

white
black
gold

Certificazioni

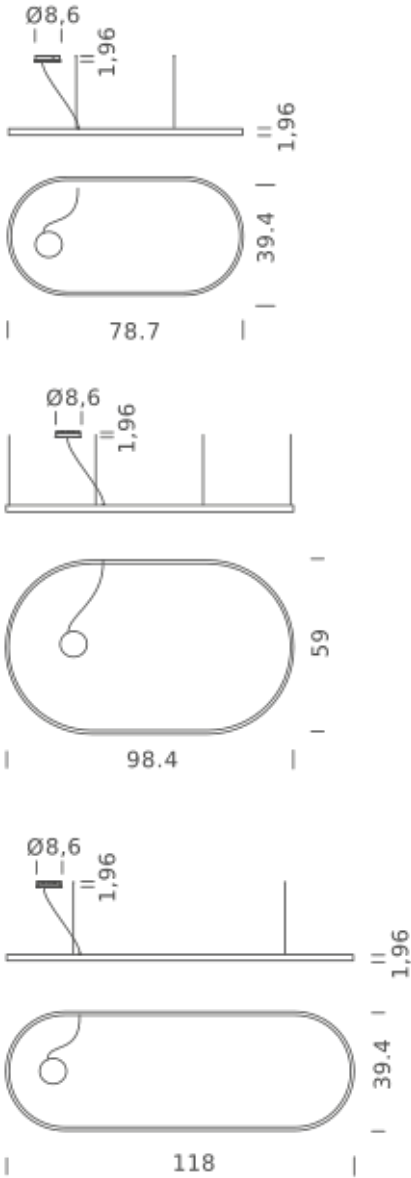

OVAL 98.4"X59" | DOWNLIGHT - 4000K

LAMPING

Source	linear LED
Total power	97W
Emission	diffused
Switching	dimmable 0-10V
Tension	110/277V
Color temperature	4000K
Luminous flux	6576lm
Typ CRI	90
IP class	IP40
Dimensions	98.4"x59"x1.9"
Materials	aluminum
Notes	<p>RAL 9005 black RAL 9016 white shipped in 4 pieces </p> <p>round canopy with 1 x driver WALIMLED100/24 1 x</p> <p>dimmer interface WDIMDALIHP 1 x electrical cable</p> <p>16.4' 6 x adjustable metal cable length 9.8' (including</p> <p>ceiling attachments)</p>

Codes

UZRO16B25G15NBO
UZRO16B25G15NNE
UZRO16B25G15NOR

Structure

white
black
gold

Certificazioni

