


# ELLISSE PENDANT DOUBLE

*Federico Palazzari*

Realised in various versions through an innovative technology developed by Nemo for coupling extrusions, Ellisse guarantees diffused direct and indirect lighting with the LED housed within the structure while remaining unobtrusive. The design is linear and contemporary, while an elegant black marble base becomes a pedestal for the floor version.

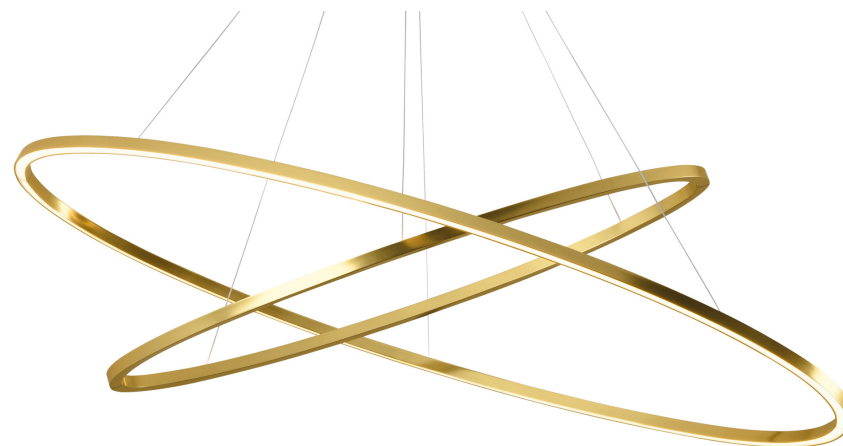

2700K

LAMPING

Source	Linear LED
Total power	70W
Emission	diffused uplight (minor), diffused downlight (major)
Switching	dimnable
Tension	120V
Color temperature	2700K
Luminous flux	1980 +1300lm
Typ CRI	85
IP class	20
Dimensions	53.1' x 27.6' x 0.8'
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, integral driver dual capability TRIAC- ELV and 0-10V, extra cable on request
Net lamp weight	11 lbs

Codes

- ELP LW2 56
- ELP LN2 56
- ELP LO2 56
- ELP LL2 56
- ELP LGW 56


Structure

- white
- black
- gold painted
- polished aluminium
- gold polished anodized

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Net weight: 12 lbs / Gross weight: 16.5 lbs
------------	--

Certificazioni

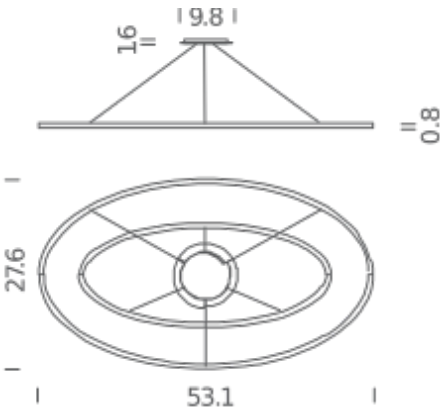

3000K

LAMPING

Source	Linear LED
Total power	70W
Emission	diffused uplight (minor), diffused downlight (major)
Switching	dimnable
Tension	120V
Color temperature	3000K
Luminous flux	1980 +1300lm
Typ CRI	85
IP class	20
Dimensions	53.1 x 27.6 x .8
Materials	Aluminum + PC
Notes	adjustable cable length 8.2' max, 3500K and 4000K available on request, integral driver dual capability TRIAC- ELV and 0-10V, extra cable on request
Net lamp weight	11 lbs

Codes

- ELP LWW 56
- ELP LNW 56
- ELP LOW 56
- ELP LLW 56

Structure

- white
- black
- gold painted
- polished aluminium

PACKAGE

Package 01	Dimension: 31.5 x 59.1 x 5.9 inches / Net weight: 12 lbs / Gross weight: 16.5 lbs
------------	--

Certificazioni

