

CAUTION - We recommend this fixture be installed by a licensed Electrician.

Before assembling and installing this product, carefully read the following:

- When installing multiple lamps; these fixtures must be wired in parallel in order to achieve the best possible light quality from each lamp. Wiring in series will result in the progressive loss of performance as the lamps move further away from the building power.
- Switch off power to the junction box before installing the lamp.
- Move light switch into the OFF position.
- When mounting to the ceiling, always use appropriate anchoring hardware.
- We recommend reading the guide before you begin installation.
- Installation Guides can be downloaded from Pablodesigns.com in the case this document is lost or damaged.
- Do not disassemble, modify or try to repair this fixture! In order to receive technical assistance contact Pablo Designs. Any modification to the fixture will nullify the manufacturer's warranty.

CLEANING INSTRUCTIONS:

- Use only a soft cloth to clean this fixture, dampened with water or mild cleanser if required, DO NOT use alcohol, solvents, or other abraasive cleaners, as this could damage the lamp finish.

TECHNICAL SPECIFICATIONS

BULB TYPE: E26/PAR30 LED

11 Watt

3000K

1000 Lumens

Contents


SOLIS FLUSH SHIPS IN MULTIPLE BOXES IN ORDER TO ENSURE THE SAFETY OF ALL COMPONENTS.

A. SOCKET ASSEMBLY (CANOPY BRACKET)

B. CANOPY COVER

C. SOLIS SHADE


D. CHECK RING

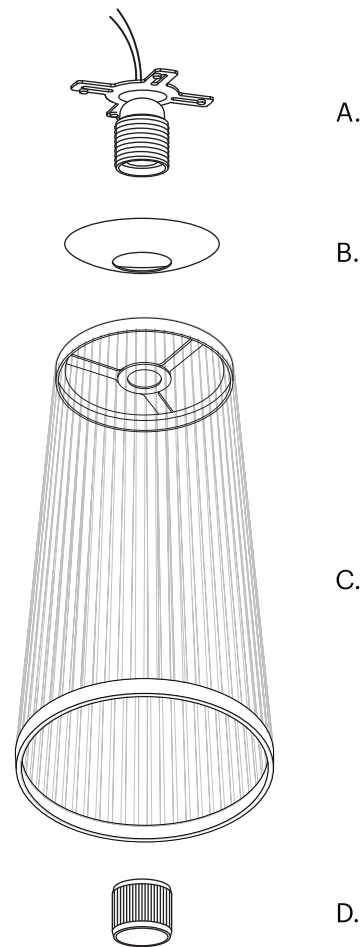


IF THERE ARE MISSING OR DAMAGED PARTS, PLEASE CONTACT US AS SOON AS POSSIBLE TO FILE A REPORT. CLEAR PHOTOS AND DESCRIPTIONS WILL ENABLE OUR CUSTOMER SERVICE TEAM TO QUICKLY AND EFFECTIVELY ADDRESS YOUR CLAIM.

(415) 865-5000
888 MARIN STREET
SAN FRANCISCO, CA 94124
INFO@PABLODESIGNS.COM
[INFO@PABLODESIGNS.COM]

- 1** Secure CANOPY BRACKET to junction box using the appropriate hardware.




- 2** Wire SOCKET to BUILDING:
[BLACK TO BLACK - LINE]
[WHITE TO WHITE - NEUTRAL]

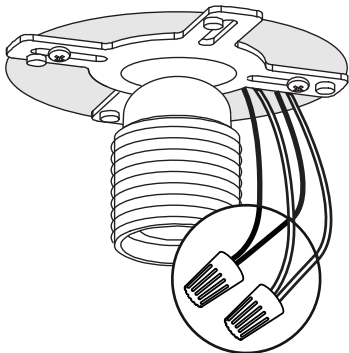


NOTE! NEATLY TUCK WIRES AND CONNECTORS UP INTO THE JUNCTION BOX.

- 3** Secure CANOPY COVER to CANOPY BRACKET via magnetic connection.

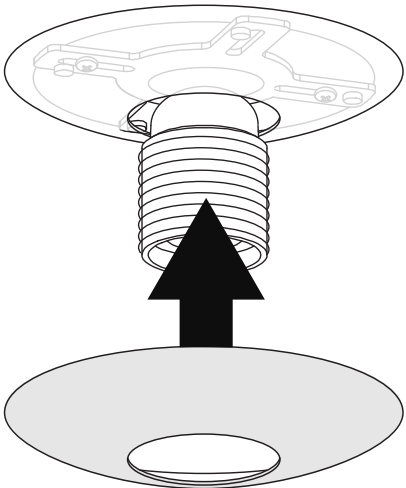

- 4** Secure SHADE to SOCKET using the CHECK RING. Install the bulb.

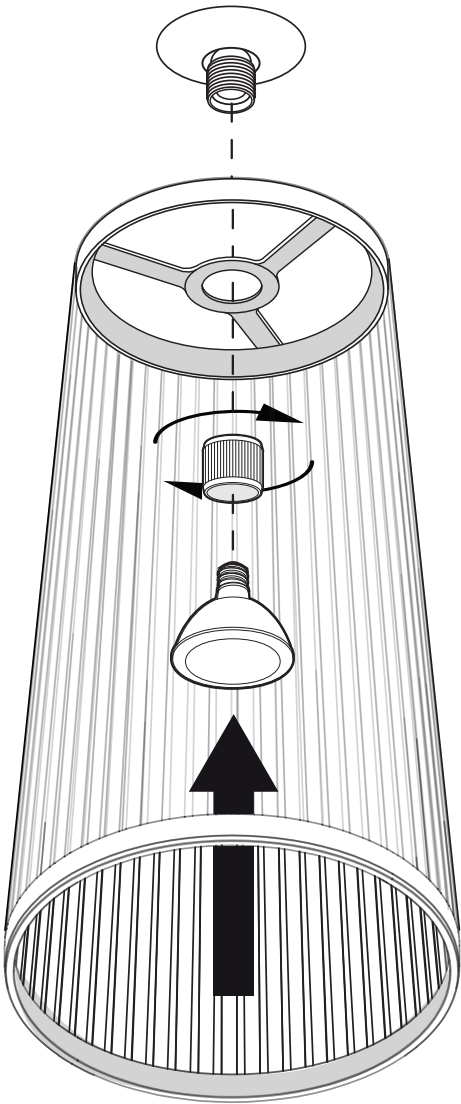

SOLIS FLUSH

