

Super Line Up&Down Indirect


Designed by FLOS Architectural, 2017



Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of uspended luminaries for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

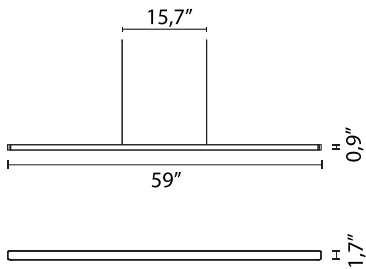

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	Top LED
Lamp category	LED
Ilcos	No
Bulb finish	Semifrosted
Number of heads	1
Power (W)	58
System power (W)	60
Source flux (lm)	6820
System flux (lm)	4914
Efficacy (lm/W)	81.9

Physical

Color	Grey
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Technical Drawings

2D	ZIP
3D	ZIP



Schematic light drawing




Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50
Beam angle C0-180 (°)	100
Beam angle C90-270 (°)	101
UGR _L	19


Electrical

Insulation class	III
Main voltage (Vac)	55.80
Forward voltage (V)	55.8
LED current (mA)	1050
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency type	No

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Notes

Cable 4.25 m

Accessories & Power Supply



REQUIRED
Accessory

08.0524.40.19

Super Line Suspension Kit
accessory for Remote installation,
White



REQUIRED
Accessory

08.0524.14.19

Super Line Suspension Kit
accessory for Remote installation,
Black



REQUIRED
Accessory

08.0524.02.19

Super Line Suspension Kit
accessory for Remote installation,
Grey



REQUIRED
Accessory

Installation

08.0524.ET.19

Remote Suspension KIT




REQUIRED
Accessory

Installation

08.0524.EU.19

Remote Suspension KIT



REQUIRED
Power supply

SP60W1050MA-10V-E01

Splice Box 9.5"x2.5"x1.5",
1050mA , 60W, 0-10V ,
Dimmable, 120V/277V