

## Super Line Pro Down NEW


Designed by FLOS Architectural



Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

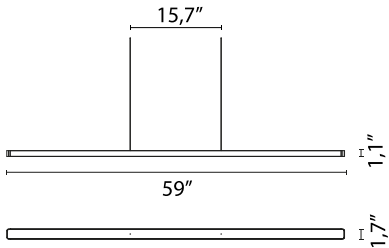

### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	Top LED
Lamp category	LED
Number of heads	1
Power (W)	38.7
System power (W)	39
System flux (lm)	3801
Efficacy (lm/W)	97.46

### Physical

Color	Brushed Brass
Orientation	Fixed
IP internal	20
IP external	20

### Download

Family spec sheet	ZIP
Mounting instructions	PDF

### Photometric Files

LDT / IES	ZIP
-----------	-----

### Technical Drawings


2D	ZIP
3D	ZIP



## Ecodesign and Energy Labelling




Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional

## Schematic light drawing



Beam Angle: 80°

h(m)	E(lx)	D(m)
1	2367	1.68
2	592	3.36
3	263	5.04
4	148	6.72
5	95	8.40

Luminous flux luminaire  
3955 lm

## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 - 50.0000h (Tc 85°C)
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	80
UGR <sub>L</sub>	19

## Electrical

Insulation class	III
Forward voltage (V)	35.9
LED current (mA)	1050
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply



REQUIRED  
Accessory

08.0524.40.19

Super Line Suspension Kit  
accessory for Remote installation,  
White



REQUIRED  
Accessory

08.0524.14.19

Super Line Suspension Kit  
accessory for Remote installation,  
Black



REQUIRED  
Accessory

08.0524.02.19

Super Line Suspension Kit  
accessory for Remote installation,  
Grey



REQUIRED  
Accessory

Installation

08.0524.ET.19

Remote Suspension KIT




REQUIRED  
Accessory

Installation

08.0524.EU.19

Remote Suspension KIT



REQUIRED  
Power supply

Electrical

SP40W1050MA-10V-A02

Remote Splice Box 9.5"x2.5"x1.5",  
1050mA , 40W, 0-10V Dimmable,  
120V/277V