

SAFETY INFORMATION

Released Date: 2023-10-30

Please read and understand this entire manual before attempting to assemble, install or operate the product.


WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

TOOLS REQUIRED

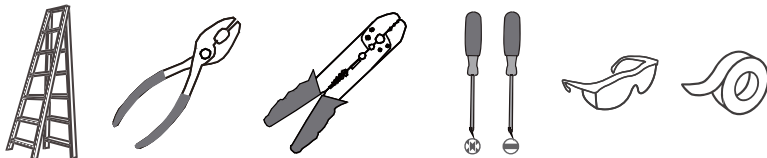


CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

If you need further assistance call Quoizel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at www.quoizel.com.

PACKAGE CONTENTS

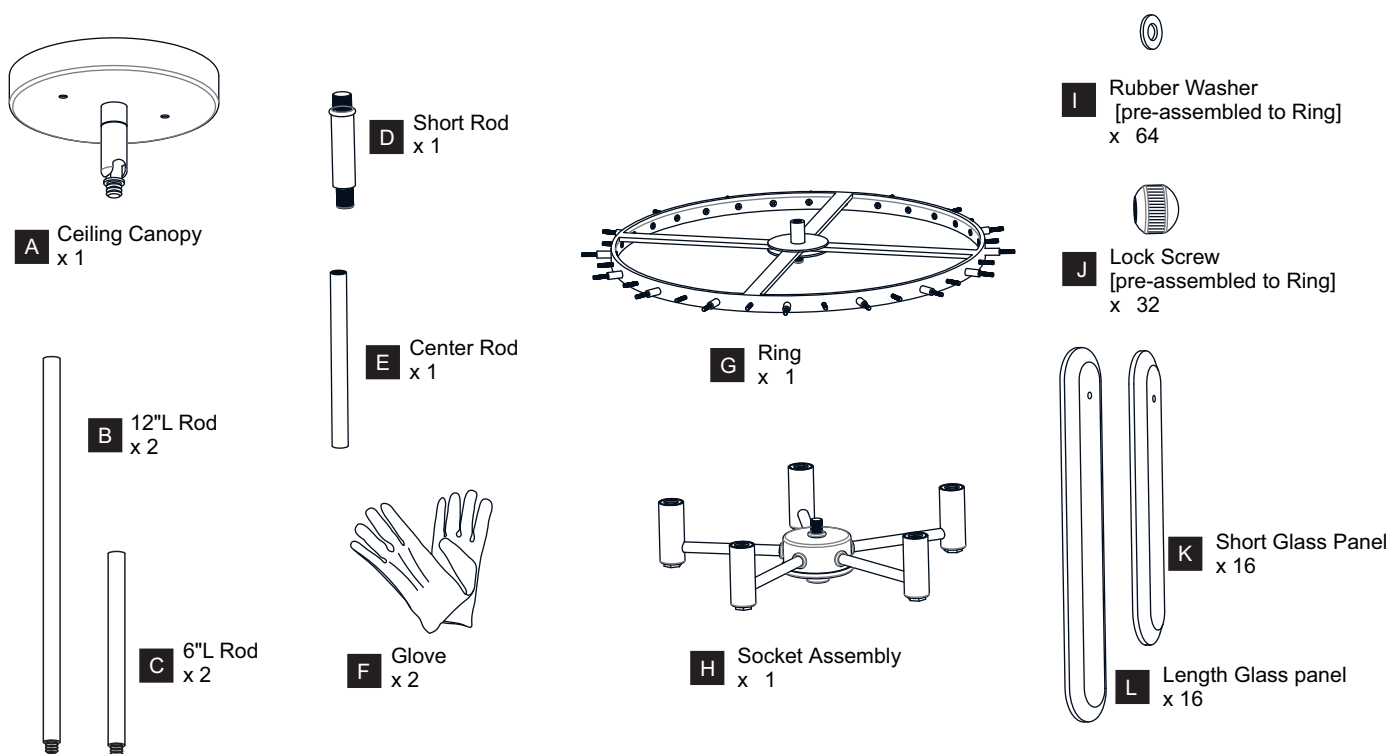

MOUNTING HARDWARE

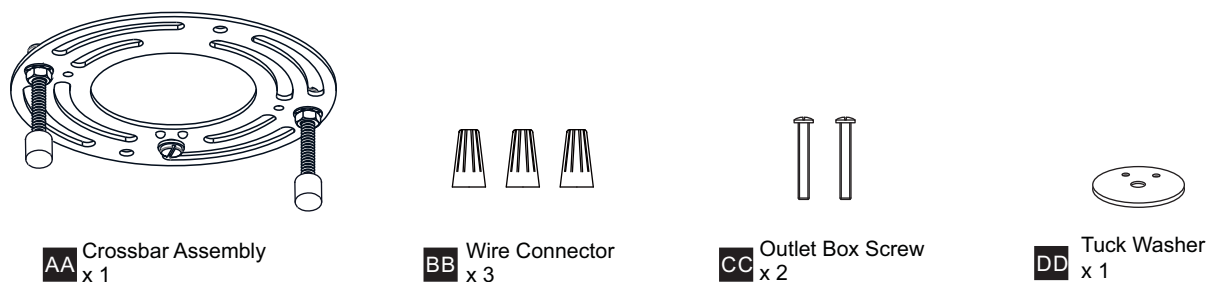


INSTALLATION


IMPORTANT: This CONVERTIBLE fixture can be mounted as pendant light or semi-flush light. **DO NOT CUT SUPPLY WIRES** if you intend to use it as pendant light.

OPTION 1: SEMI-FLUSH - PCSTI1720C


* Set aside (2) 6"L Rods and (2) 12"L Rods, swivel since they are not required for the semi-flush installation.



1 Install Socket Assembly to Ring

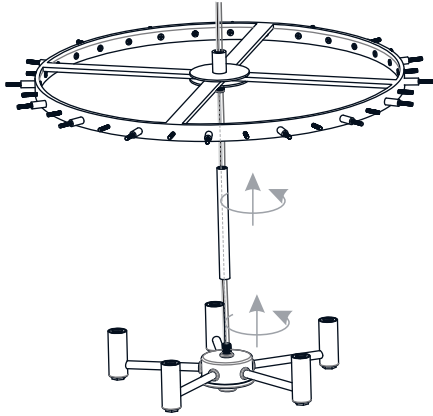


2 Remove Swivel

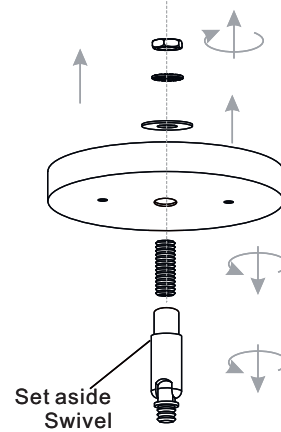


3 Install Ceiling Canopy


* Cut the supply wires leaving approximately 8" of wire extending from the ceiling canopy after assembly.

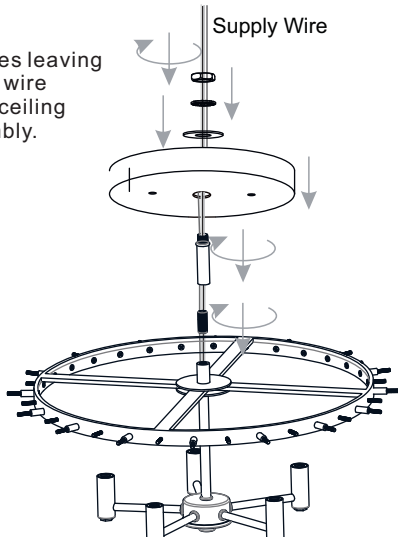

4 Install Crossbar Assembly

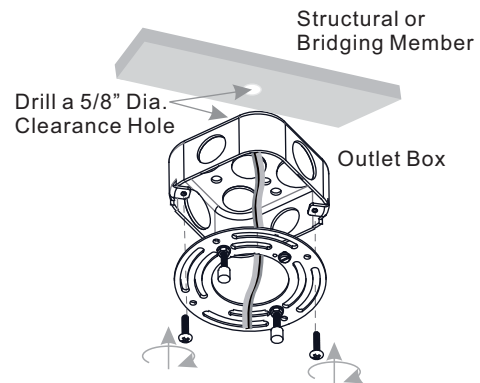


5 Install Safety Cable

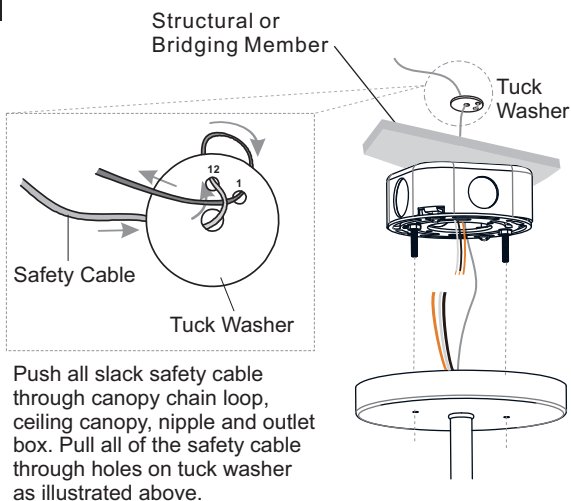

Push all slack safety cable through canopy chain loop, ceiling canopy, nipple and outlet box. Pull all of the safety cable through holes on tuck washer as illustrated above.


6 Wiring

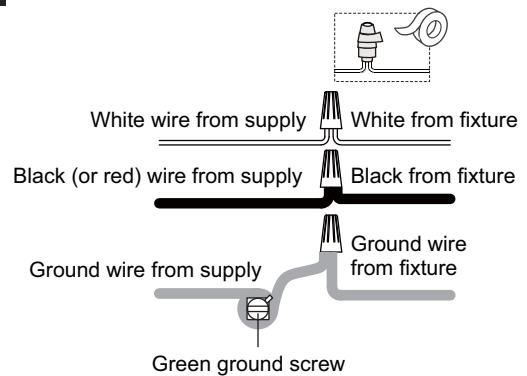

INSTALLATION

7


Install Ceiling Canopy to Crossbar Assembly

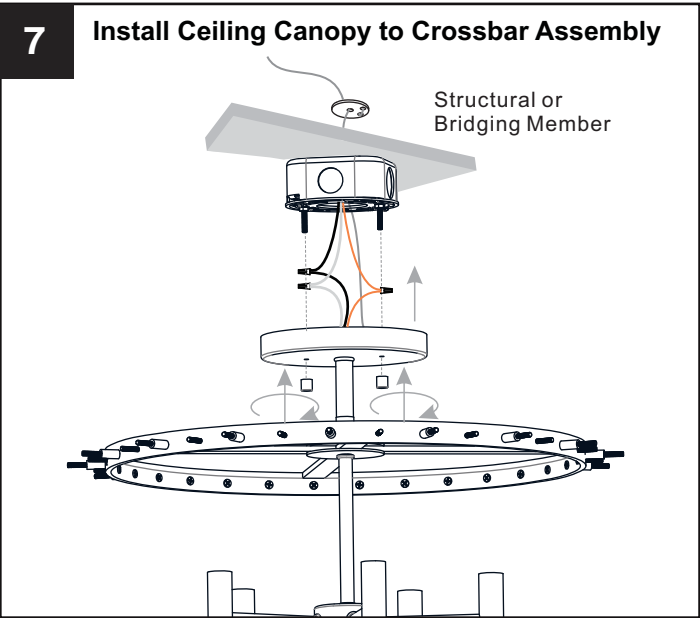

Structural or Bridging Member


8

Install Short Glass Panels

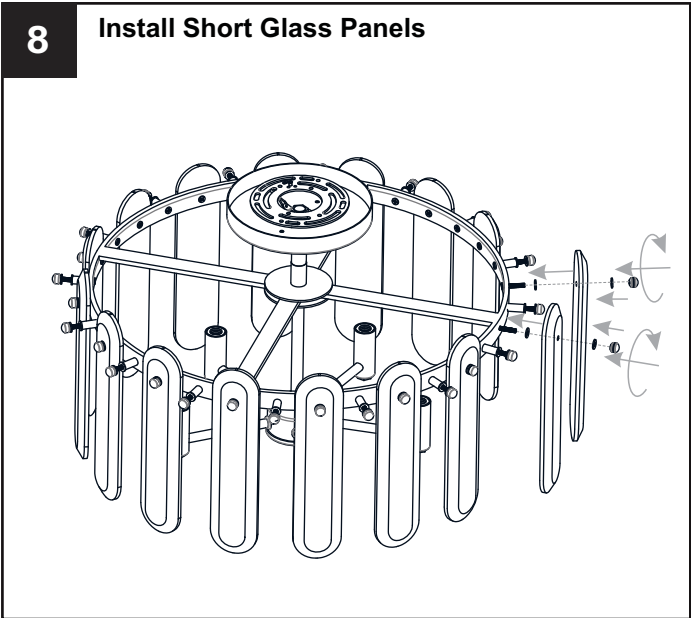


9

Install Length Glass Panels

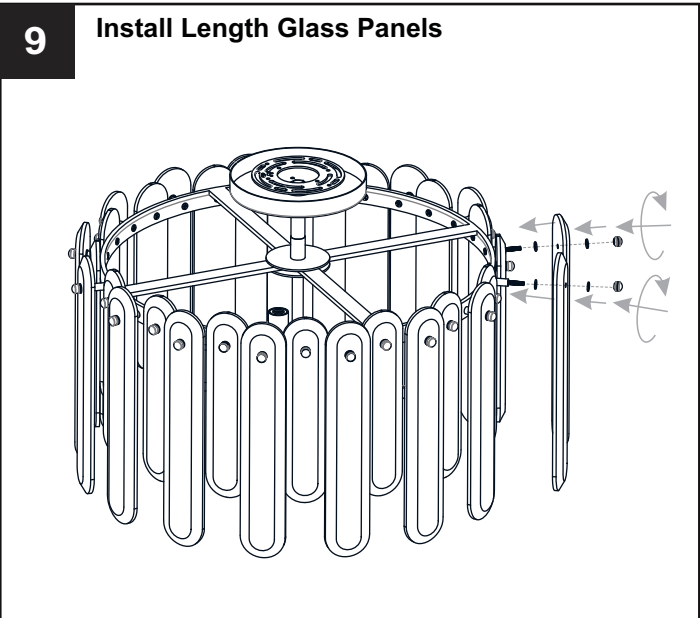



10

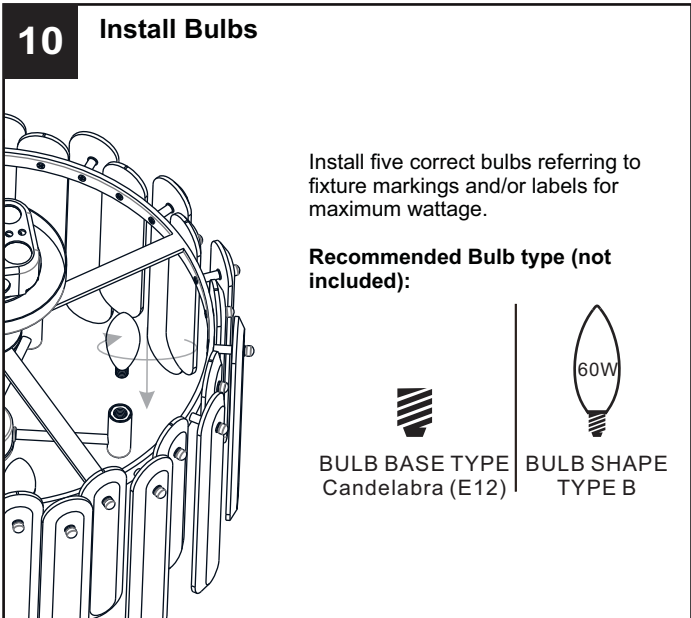Install Bulbs



Install five correct bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):

	
BULB BASE TYPE Candelabra (E12)	BULB SHAPE TYPE B 60W

Your installation is now complete! Restore electricity and save this sheet for future reference.

INSTALLATION


OPTION 2: PENDANT - PCSTI2820C

1

Install Rods


Optional Rods:

8 Feet Ceiling:
(2) 12"L Rods.
9 Feet Ceiling:
(2) 6"L Rods + (2) 12"L Rods.

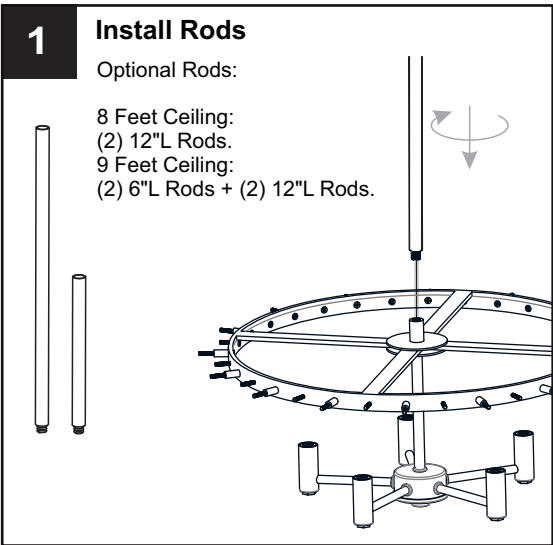


2

Tighten hex nut inside of the Ceiling Canopy

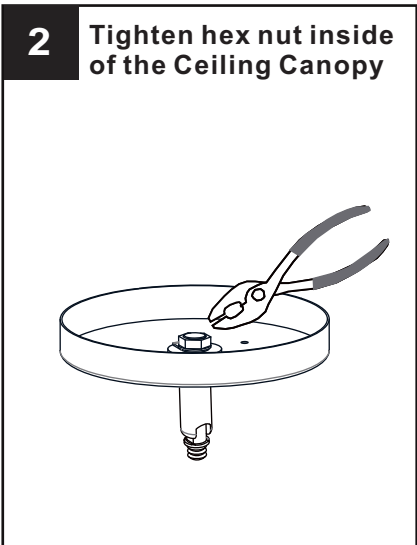


3


Install Ceiling Canopy to Upper Rod

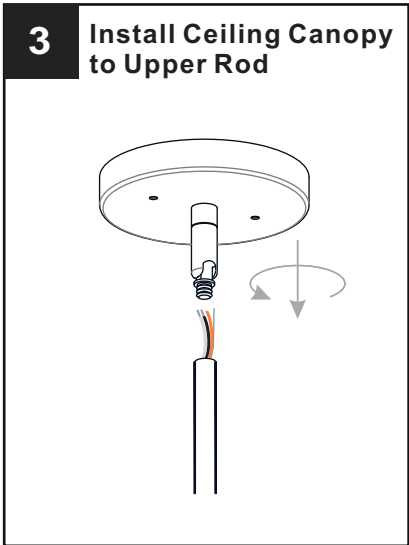


4 Install Crossbar Assembly

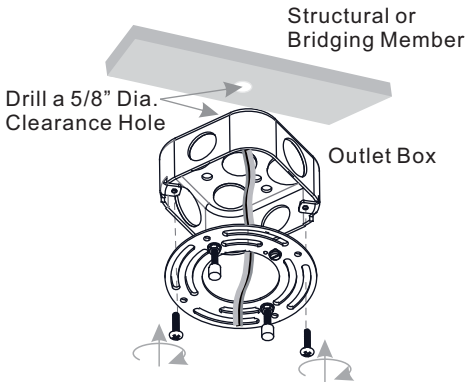


5 Install Lanyard

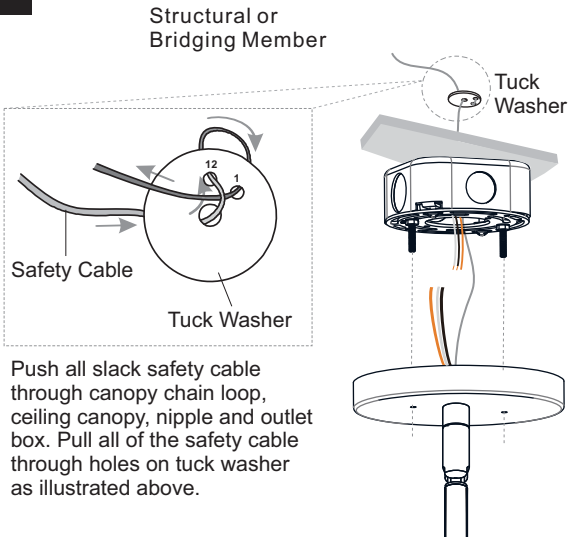


6 Wiring

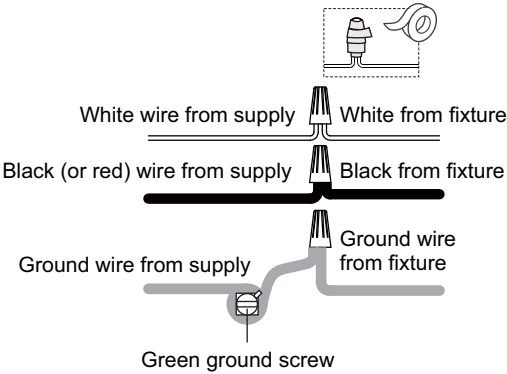


7 Install Ceiling Canopy to Crossbar Assembly

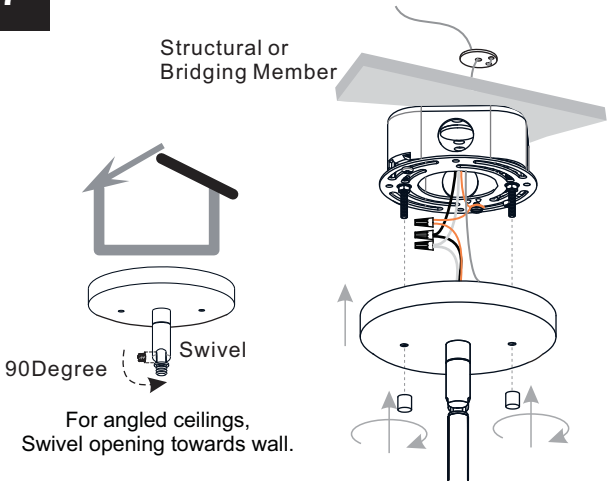

8 Install Short Glass Panels

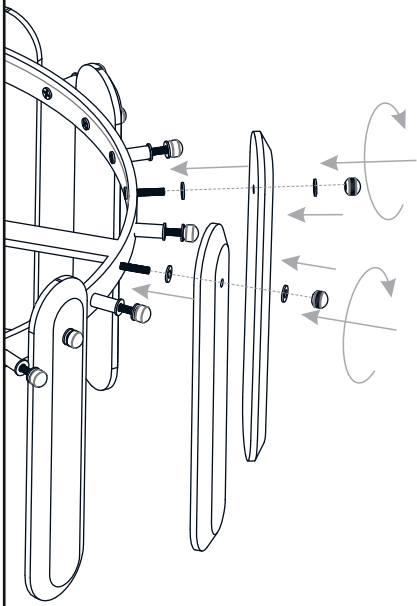



9 Install Length Glass Panels

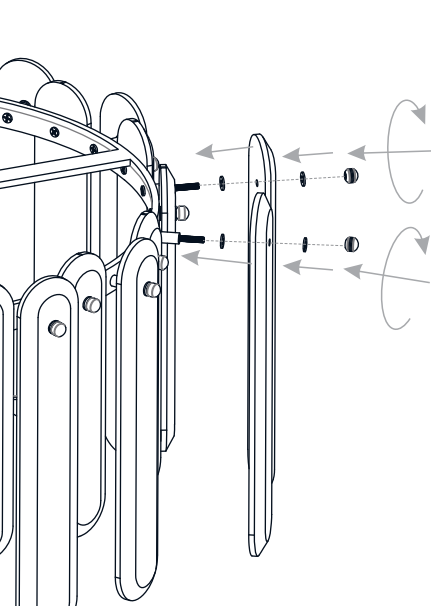

10 Install Bulbs

Install five correct bulbs referring to fixture markings and/or labels for maximum wattage.

Recommended Bulb type (not included):

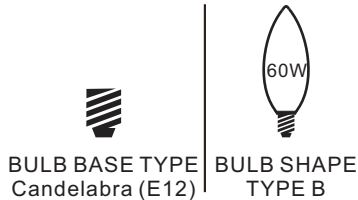

Your installation is now complete! Restore electricity and save this sheet for future reference.