


CONTENTS

Surface Mount 01 Lighting Assembly

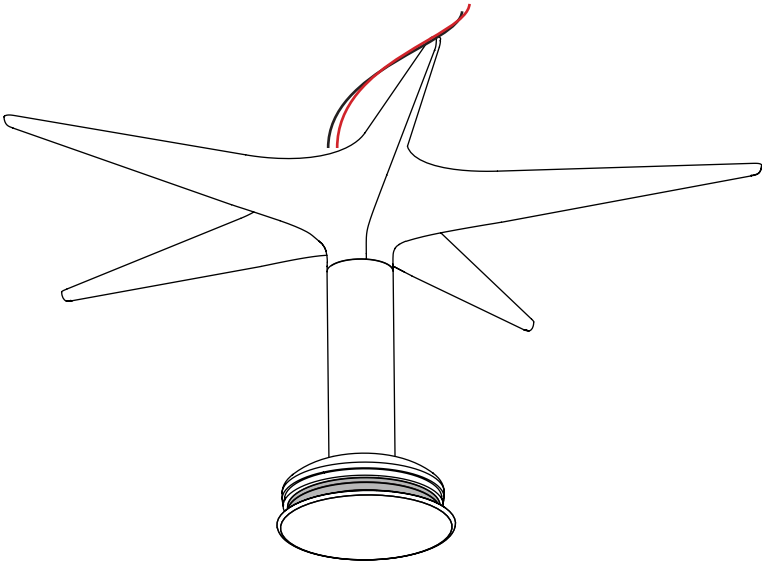

<p>(x2) 8-32 Screw</p>	<p>(x5) Wago Connector</p>	<p>(x1) Driver</p>
<p>Glass shade</p>	<p>(x2) Toggle anchor On 240V fixtures only</p>	<p>(x2) Wood screw On 240V fixtures only</p>
	<p>(x2) Long 8-32 screw On 240V fixtures only</p>	<p>(x2) Metal screw On 240V fixtures only</p>


SAFETY INFORMATION

Suitable for dry or damp locations.
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Laddi Surface Mount 01 | INSTALLATION

Note: Please contact a licensed electrician for installation. Ensure power is off during installation.


01. Unscrew the shade cap (A), then unscrew the nut (B) from the fixture assembly (C) to release the star shaped body (D) , and crossbar with rod assembly (E).

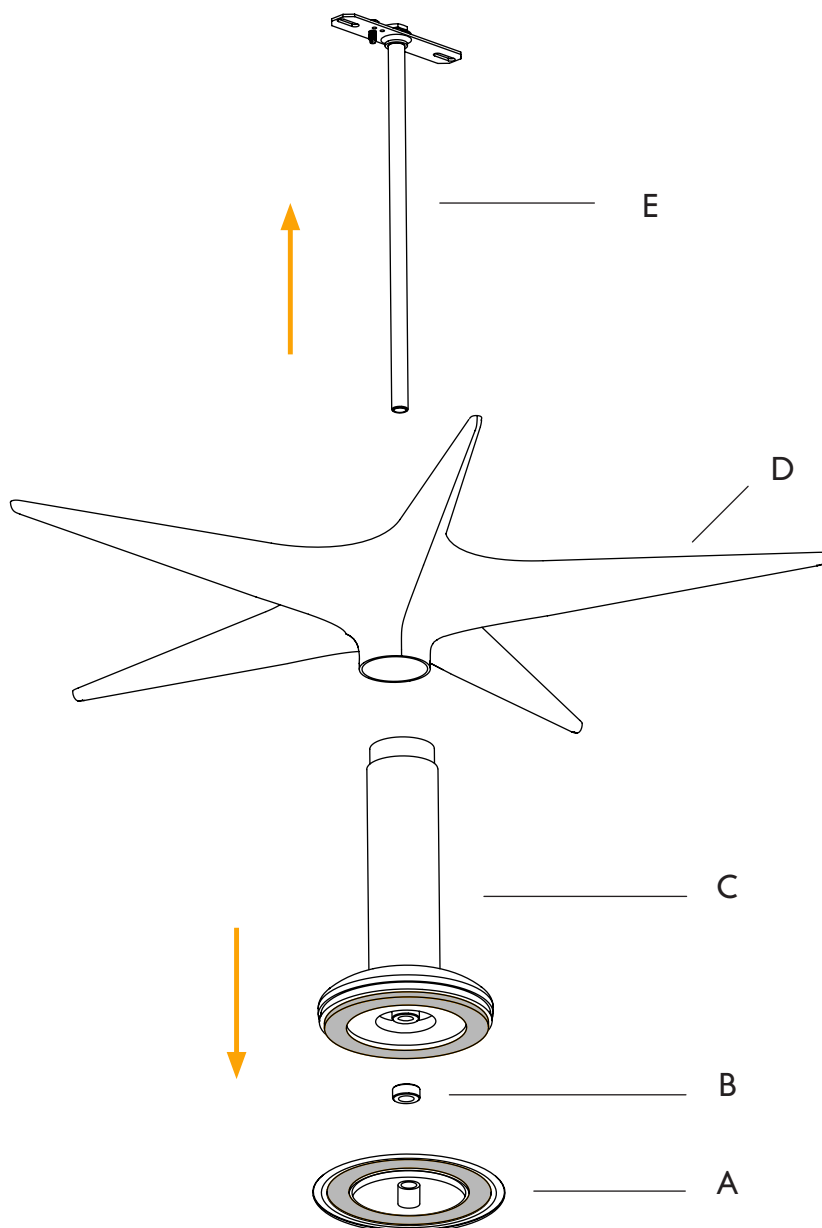

Laddi Surface Mount 01 | INSTALLATION

Note: Please contact a licensed electrician for installation. Ensure power is off during installation.

02. Bring the LED driver (F) to the J-box(G), then make the lead wire connection with the provided 2-port wagos (H).
03. Optional, make the dimming wire connection with the provided 2-port wagos (I).
04. Tuck the LED driver into the J-box, be sure to pull out the green ground wire.
05. Bring the crossbar with rod assembly (E) up to J-box, and make the ground wire connection with provided 2-port wagos (J).
06. Secure the crossbar with rod (E) to J-box (G) with the provided two screws (K).
07. Fit the star shape base (D) onto the fixture assembly (C), then make the low voltage wire connection with provided 2-port wagos (L). NOTE, the wires do not run inside the crossbar with rod.
08. Bring up the whole fixture over up and over the rod, fitting the rod through the center hole on the fixture.
09. Then secure the fixture with a nut (B). Be sure to tighten it securely.

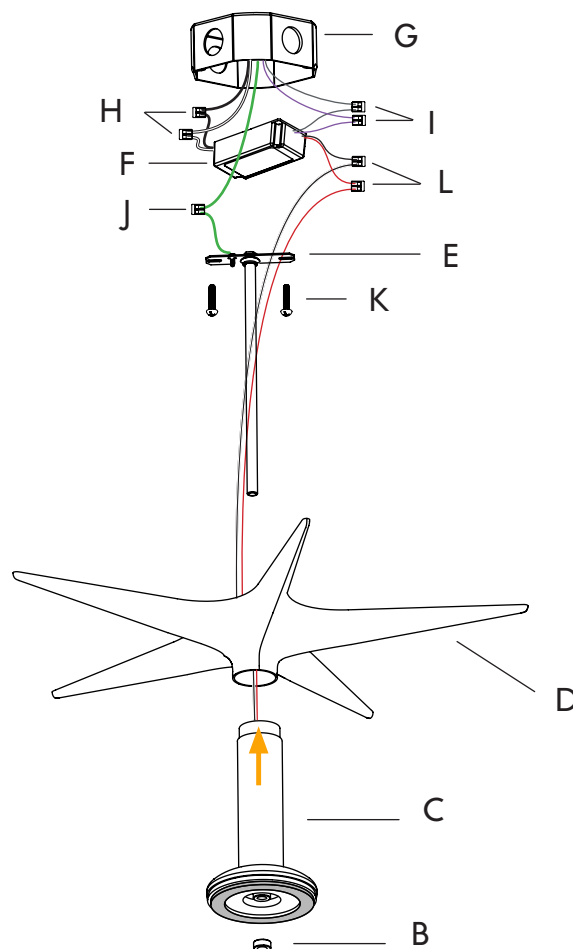

Laddi Surface Mount 01 | INSTALLATION

Note: Please contact a licensed electrician for installation. Ensure power is off during installation.

10. Secure the Glass shade (N) on to the main fixture (C) with a shade cap (A).
Be sure to align the glass with the rubber gasket for even glass fitment.

