




Crisp/Dimple/Phase/Ripple
Corded Plug-in Sconce

18436 rA

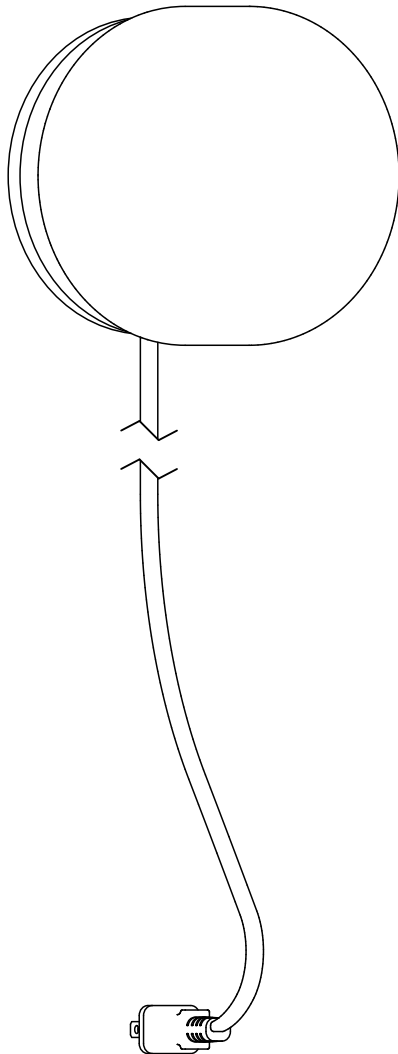


IMPORTANT SAFETY INSTRUCTIONS

This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.


Input: 8W | 110-120VAC



Calling for backup? Scan above
to contact our team.

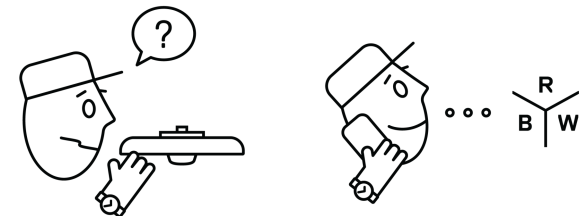


www.RBW.com
+1 212 388 0399
support@RBW.com
© 2023, RBW Studio LLC

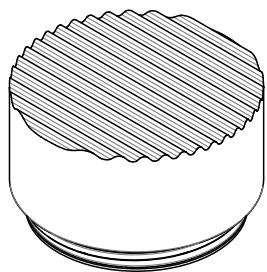

Crisp Glass

Part numbers may vary. See order for details


Part Number	Description
12220	Crisp Glass Clear & Painted White
12221	Crisp Glass Chrome & Painted White
12222	Crisp Glass Clear & Frosted
12223	Crisp Glass Copper & Painted White



Phase Glass

Part numbers may vary. See order for details


Part Number	Description
14212	Phase Glass

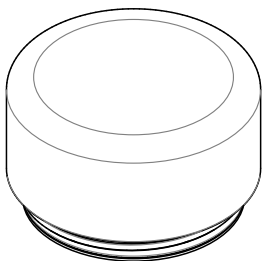

Dimple Glass

Part numbers may vary. See order for details

Part Number	Description
14149	Dimple Glass Clear & Painted White
14151	Dimple Glass Clear & Smoked
14155	Dimple Glass Frosted
14153	Dimple Glass Clear & Amber




Ripple Glass

Part numbers may vary. See order for details

Part Number	Description
17869	Ripple Glass w Gasket. White Interior.
17886	Ripple Glass w Gasket. Smoked.
17887	Ripple Glass w Gasket. Frosted Exterior.
17888	Ripple Glass w Gasket. Copper Exterior.
17889	Ripple Glass w Gasket. Jade.


Corded Plug-in (Back)

What's Included: Part Configurations May Vary

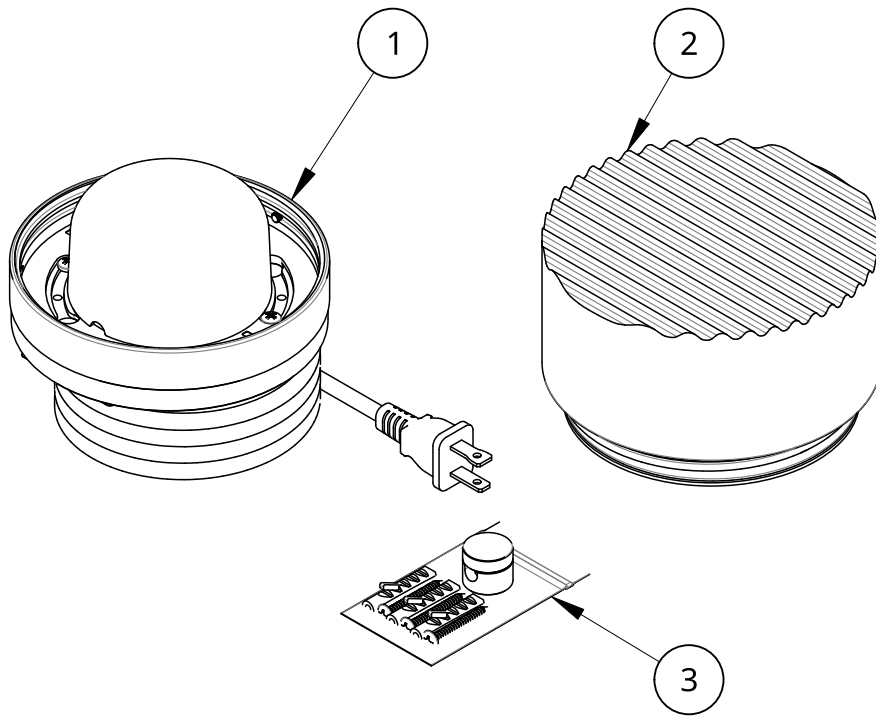

Item	Qty	Part number	Description
1	1	17957-AA01-27	Assembly: Round LED Module 5". Corded Plug-in (Back). Natural Anodized. 2700K CCT
2	1	12220	Package: Crisp Glass Clear & Painted White
3	1	18439	Package: Corded Plug-in Hardware Kit

* Adjust Screw depth for tightness as needed

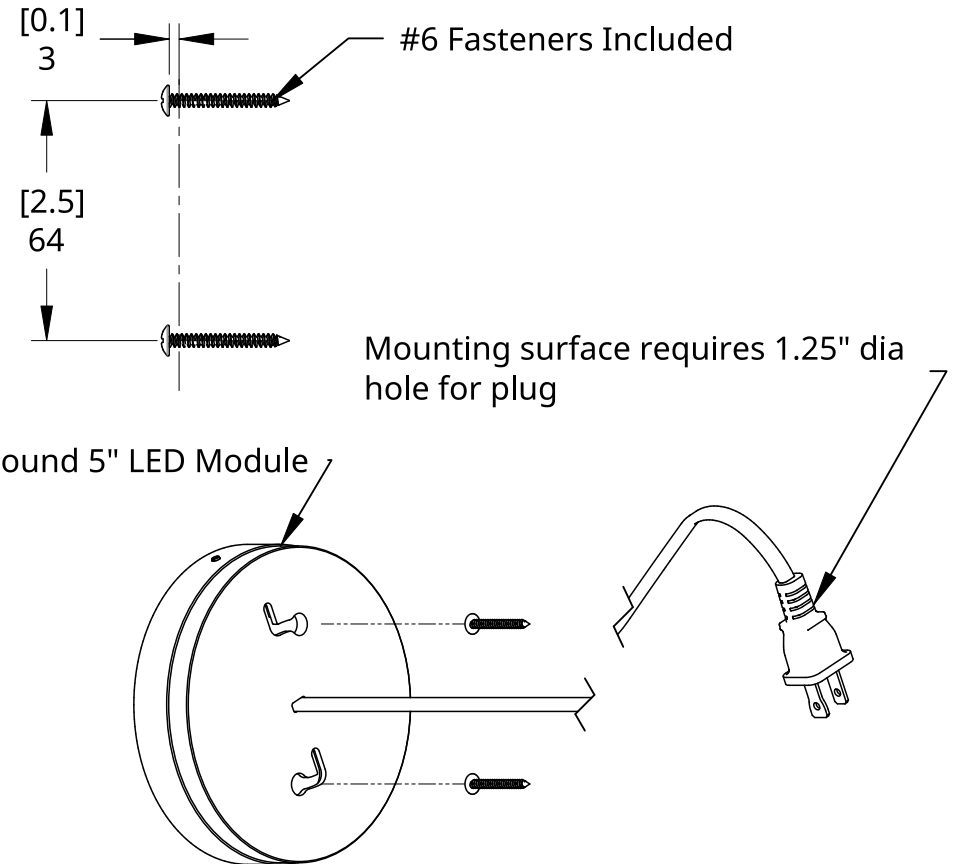


Installation - Module Corded Plug-in (Back)

1. Sink 2X #6 Screws using RBW mounting template so screw heads are approximately 0.1" from mounting surface.
2. Remove template from wall.
3. Place Module keyholes over screw heads.
4. Rotate Module counterclockwise until it drops vertically and is locked in position.


Corded Plug-in (Bottom)

What's Included: Part Configurations May Vary

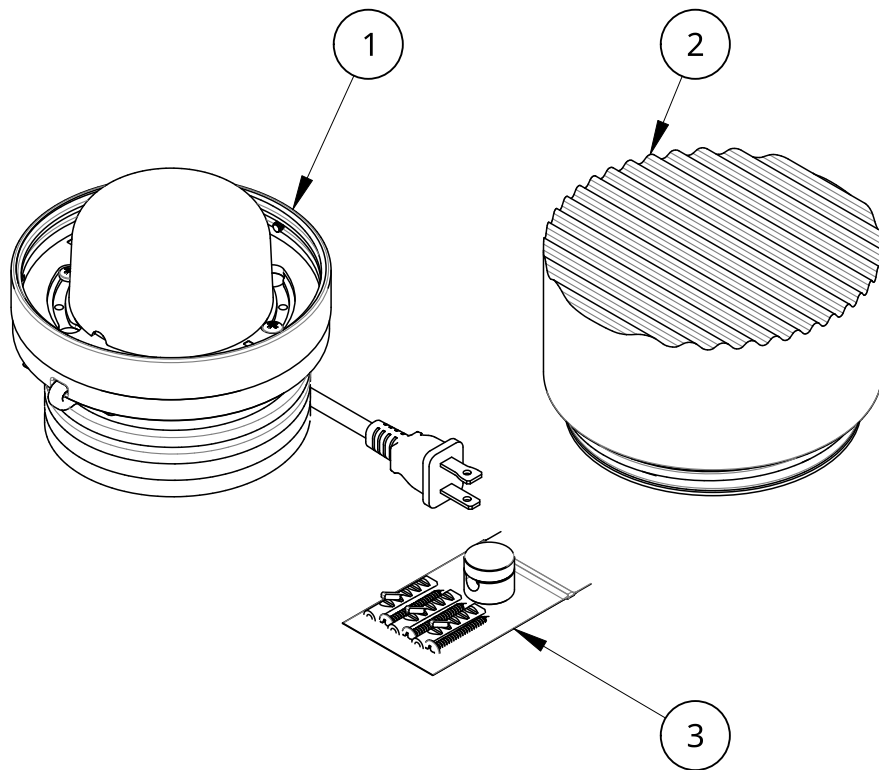

Item	Qty	Part number	Description
1	1	17959-AA01-27	Assembly: Round LED Module 5". Corded Plug-in (Bottom). Natural Anodized. 2700K CCT
2	1	12220	Package: Crisp Glass Clear & Painted White
3	1	18439	Package: Corded Plug-in Hardware Kit

* Adjust Screw depth for tightness as needed

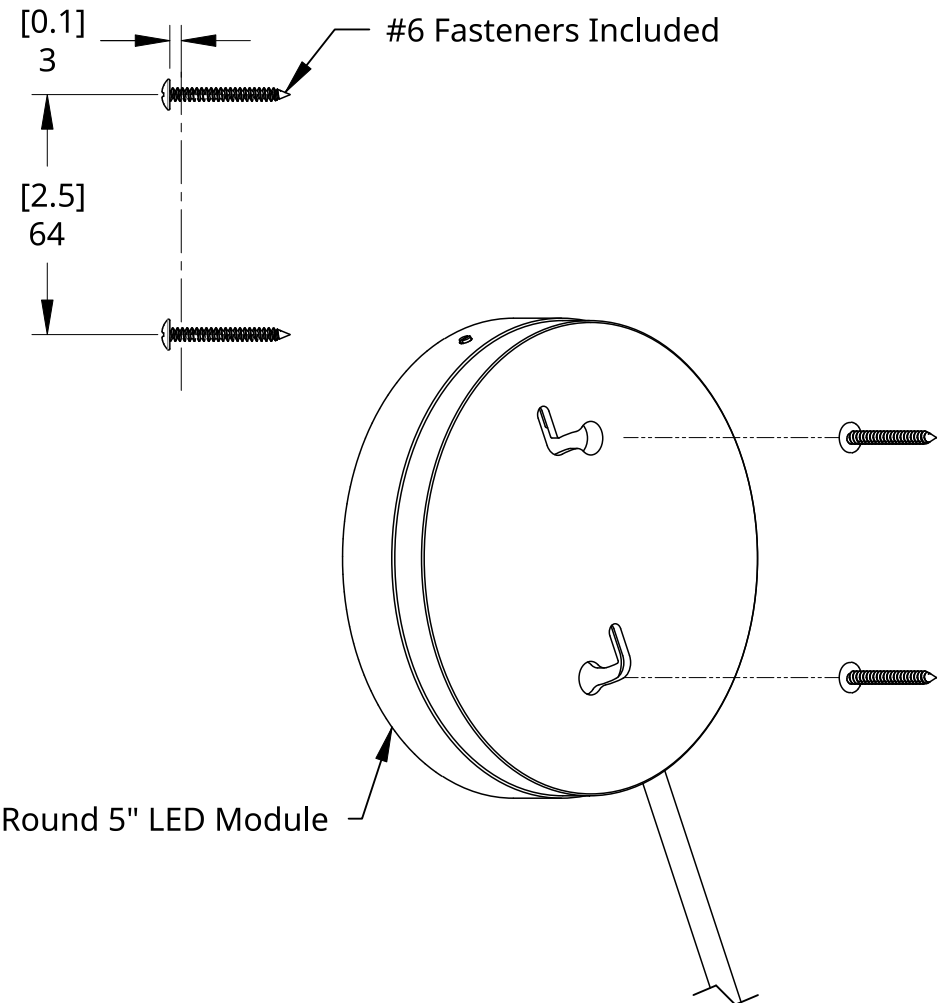


Installation - Module Corded Plug-in (Bottom)

1. Sink 2X #6 Screws using RBW mounting template so screw heads are approximately 0.1" from mounting surface.
2. Remove template from wall.
3. Place Module keyholes over screw heads.
4. Rotate Module counterclockwise until it drops vertically and is locked in position.



Corded Plug-in (Toggle Switch)

What's Included: Part Configurations May Vary

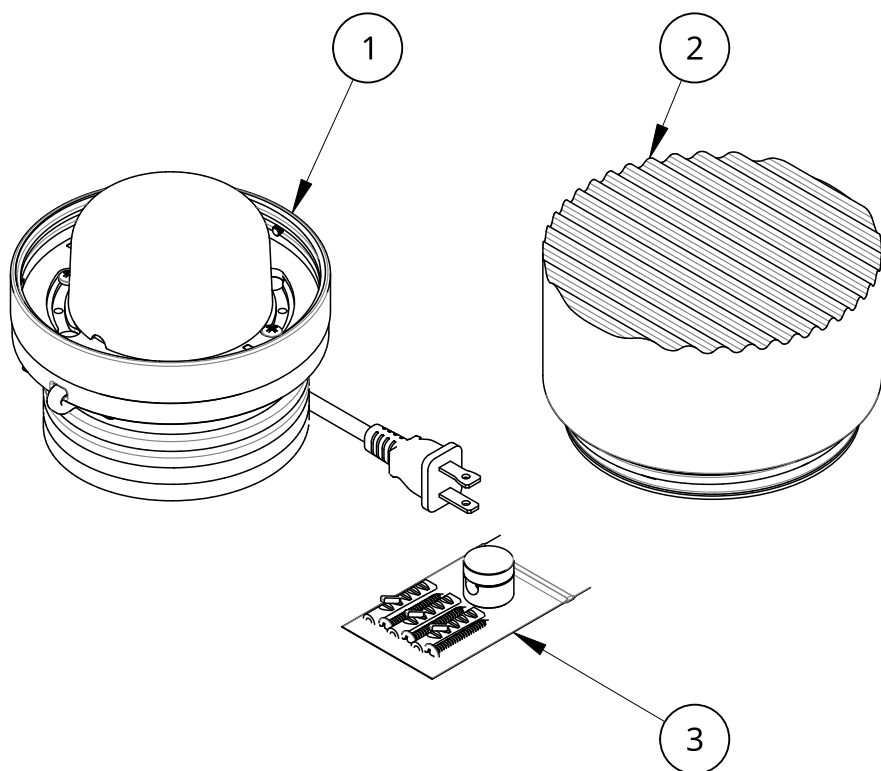


Item	Qty	Part number	Description
1	1	17961-AA01-27	Assembly: Round LED Module 5". Corded Plug-in (Toggle Switch). Natural Anodized. 2700K CCT
2	1	12220	Package: Crisp Glass Clear & Painted White
3	1	18439	Package: Corded Plug-in Hardware Kit

* Adjust Screw depth for tightness as needed

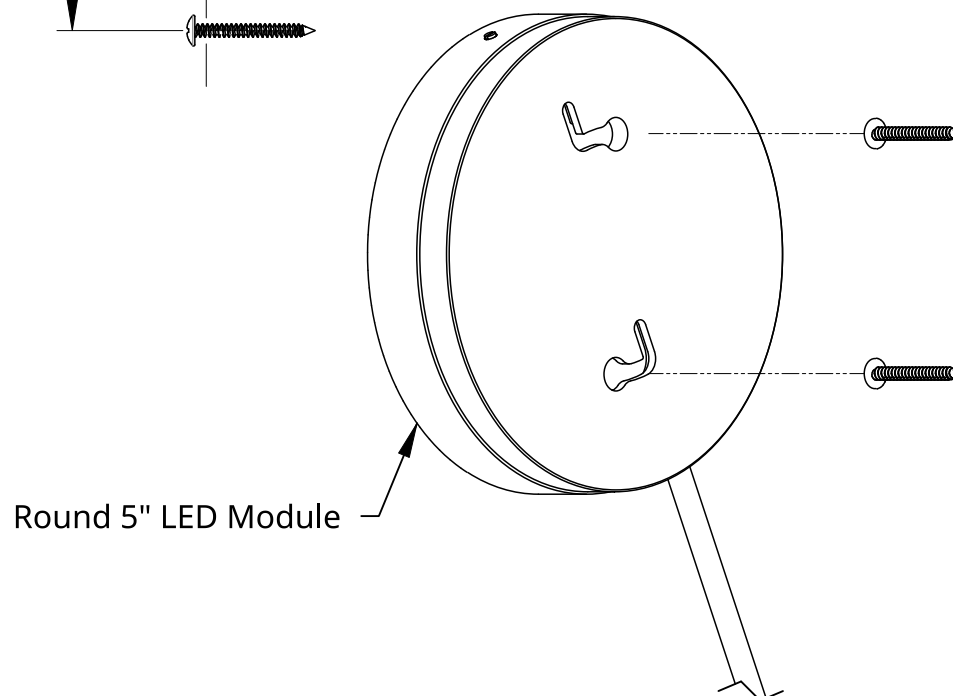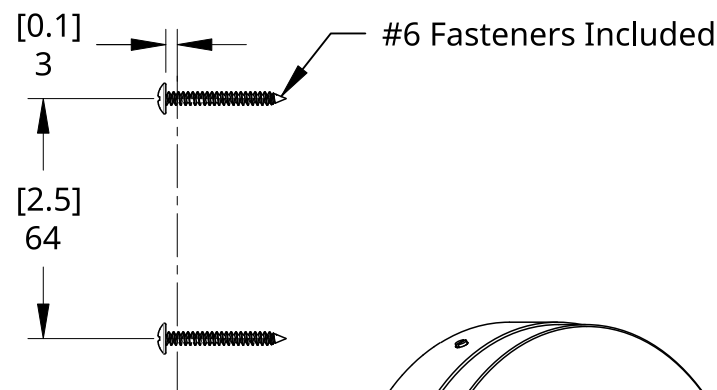

Installation - Module Corded Plug-in (Toggle Switch)


1. Sink 2X #6 Screws using RBW mounting template so screw heads are approximately 0.1" from mounting surface.
2. Remove template from wall.
3. Place Module keyholes over screw heads.
4. Rotate Module counterclockwise until it drops vertically and is locked in position.

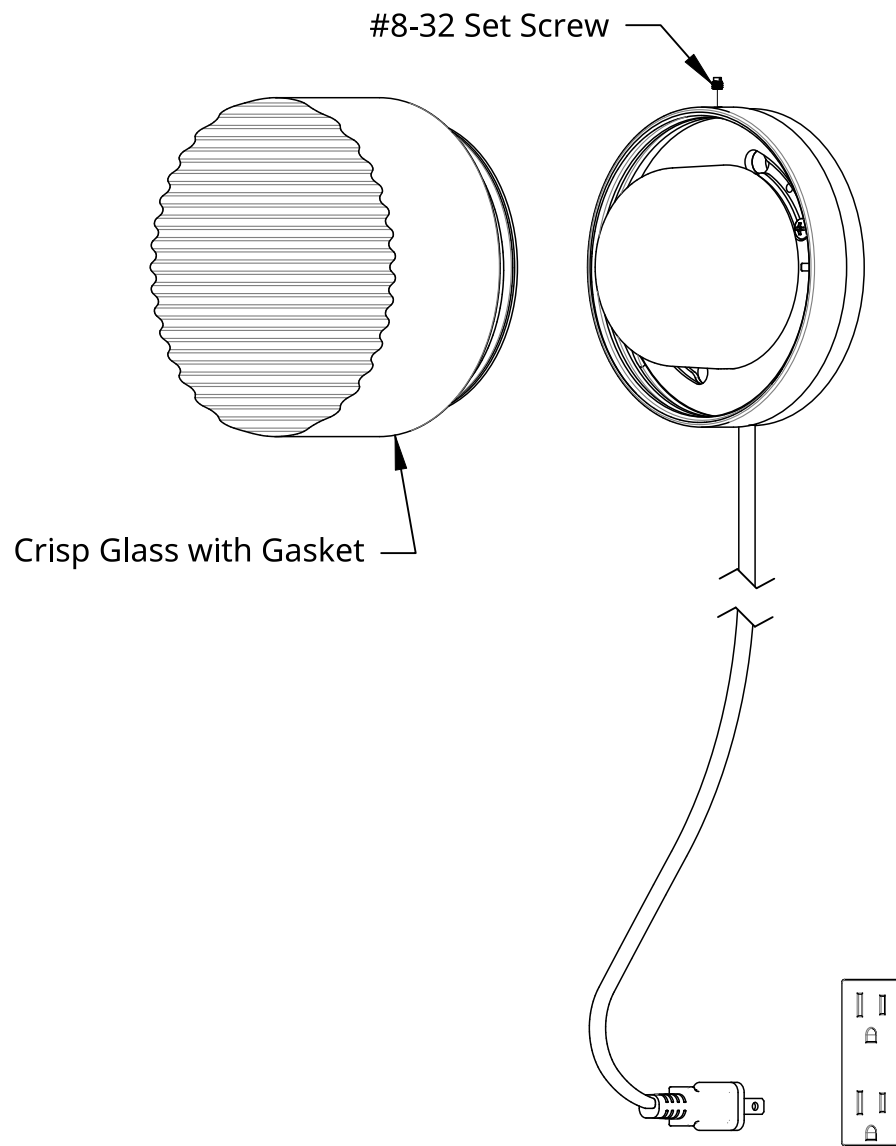

Page Intentionally Left Blank

Installation - Sconce Glass


1. Thread Sconce Glass clockwise onto Module.
2. Fasten #8-32 Set Screw to secure Glass.
3. Plug in fixture to desired 110-120VAC outlet.

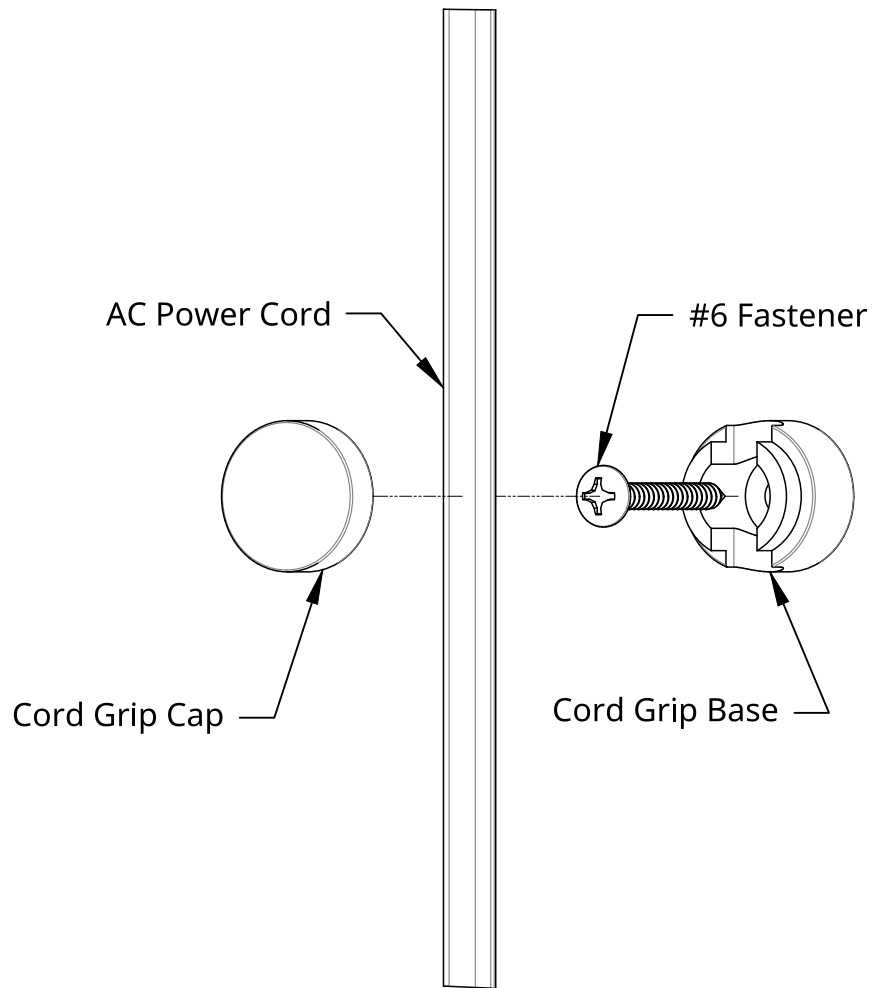

Page Intentionally Left Blank

Installation - (Optional) Cord Grip

1. In desired location place Cord Grip Base against mounting surface and sink #6 Fastener through Cord Grip Base.
2. Place AC Power Cord into Cord Grip Base and thread cap clockwise onto Base.
3. Congratulations! End of guide.

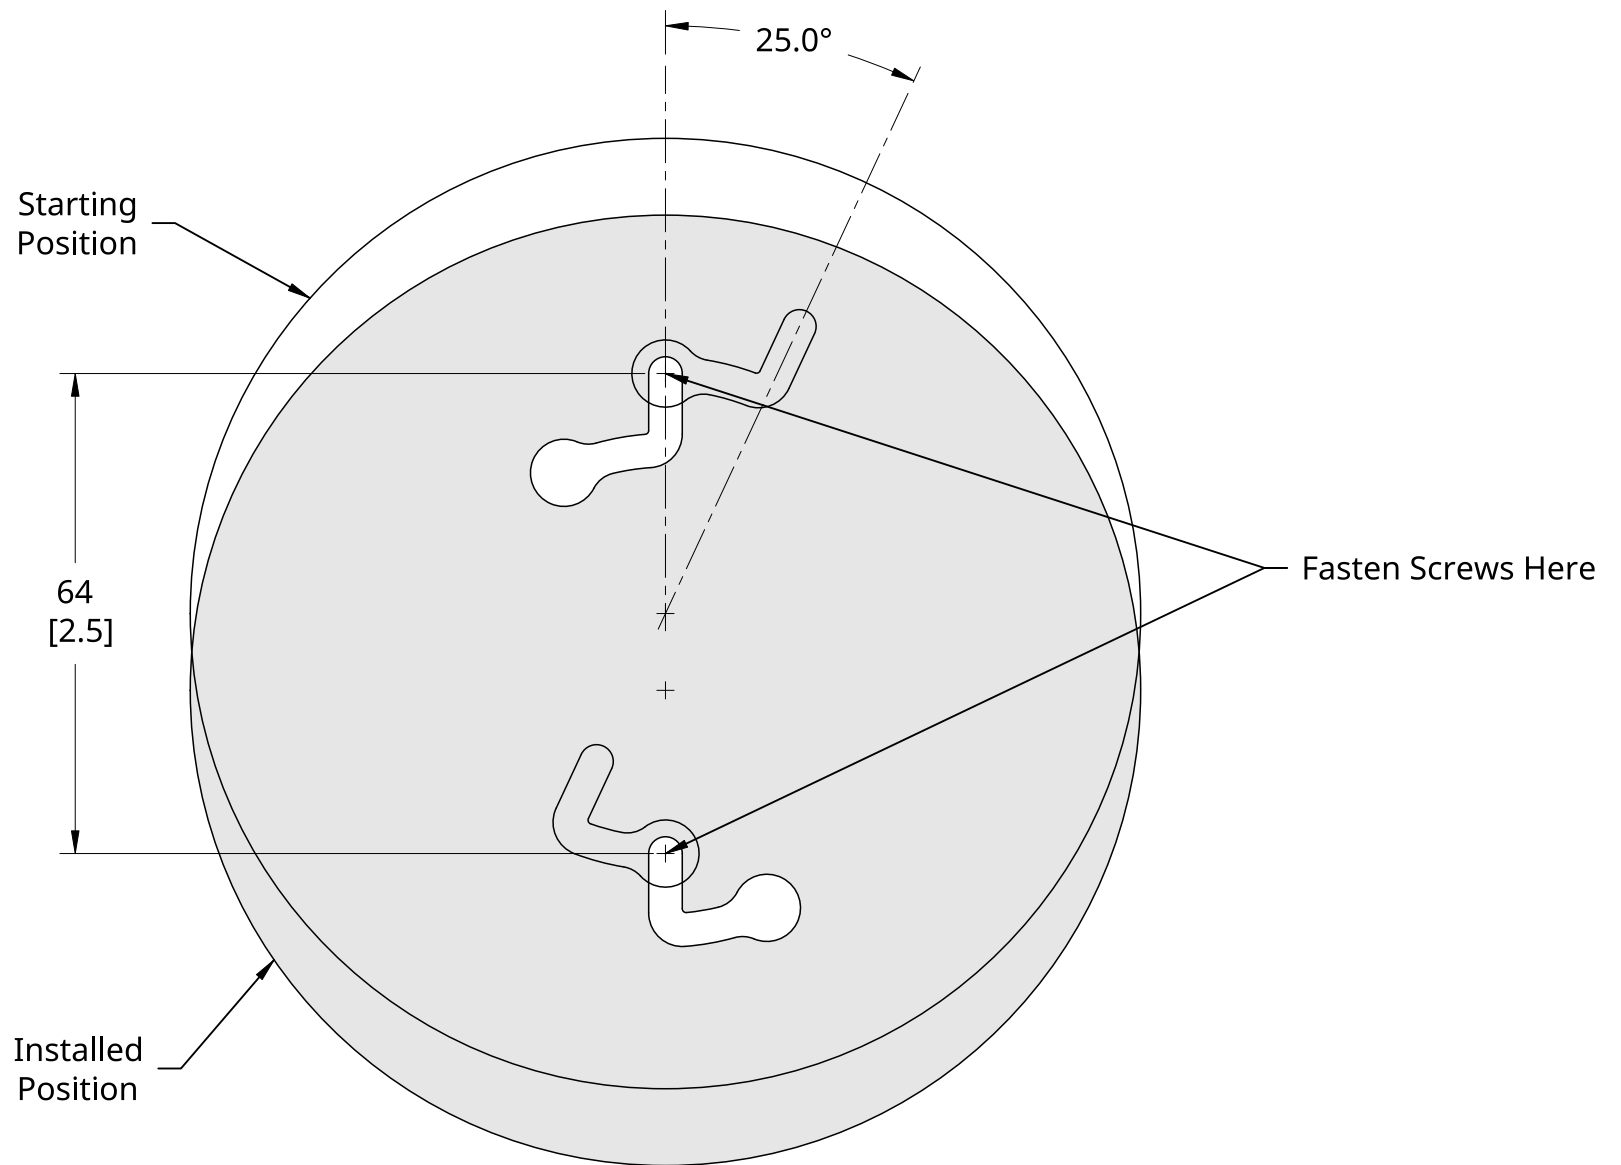

RBW Mounting Template