

# Cape Flush Mount

Ceiling Flush Mounts

## YOUR PRODUCT CODE

CP-FM- - - - -  
- -

### DESCRIPTION

Designed in collaboration with Little Wing Lee of Studio & Projects, Cape is a modern ode to maritime design—a refined exploration of nautical light—where distinctive geometry, playful expression and high-performance lighting technology come together.

### MATERIALS

Blown solid glass, steel, aluminum

### PRODUCT DIMENSIONS

Small: 6 in Dia 4 in H | Medium: 9 in Dia 4 in H

### PRODUCT WEIGHT

Small: 2lb | Medium: 3.5lb

### PERFORMANCE

Delivered Lumens Medium 360.4lm (AC)  
684.2lm (DC) | Small 324lm (AC) 401.5 lm (DC)  
Power Consumption Medium 12W (AC) 8W (DC)  
| Small 8W (AC) 7.2W (DC)  
Luminous Efficacy Medium 30 lm/W (AC) 85.5  
lm/W (DC) | Small 40.5 lm/W (AC) 55.8 lm/W  
(DC)  
90+ CRI

### PATENT FILE NUMBER

Patent Number 202412578, DM/236841

### CERTIFICATION

ADA Compliant  
UL Listed  
• Suitable for Wet Locations  
IP65



### LED LIFESPAN

50k hr

## SPECIFICATION LOGIC

### SIZE

Small	S
Medium	M

### PRIMARY FINISH

Jet Black	PC94
Taupe	PC95
Ocean Blue	PC96
Copper Brown	PC97
Custom Powder Coated	PCXX

### COLOR TEMPERATURE

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

### DIMMING / CONTROL / INPUT


10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
Low Voltage (Driver required, driver not included)	LV

### IP RATING

IP 65	IP65
-------	------

## DRAWINGS

CP-WS-S Cape Sconce Small (Rotate 90 degrees for flush mount version)

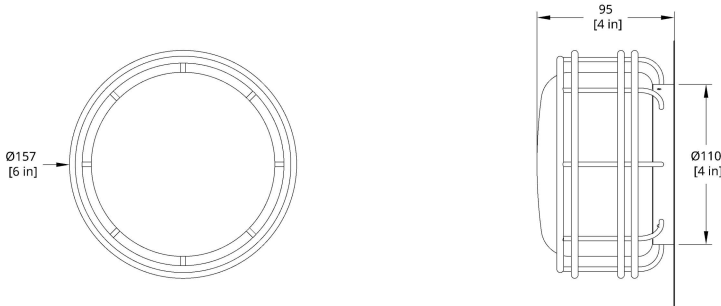

CP-WS-M Cape Sconce Medium (Rotate 90 degrees for flush mount version)

