


Ample Pendant

23341 r A

Low Voltage Input

Note: External power supply may be required

RBW recommends this product be installed by
a qualified electrician only.

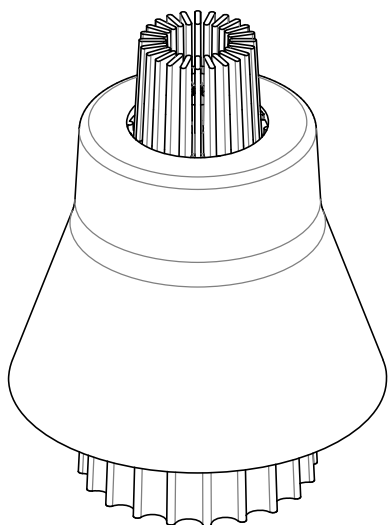

CAUTION:

Before starting, turn off power
at main circuit panel.

ADVERTENCIA:


Antes de comenzar la instalación,
apague la corriente en el tablero
principal.

ATTENTION:

Coupez l'alimentation avant de
procéder à l'installation.





Calling for backup? Scan above
to contact our team.

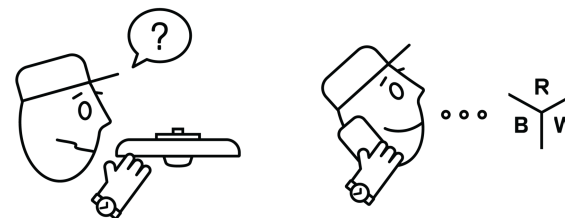

www.RBW.com
+1 212 388 0399
support@RBW.com
© 2025, RBW Studio LLC

Cable Suspension

What's Included: Part Configurations May Vary

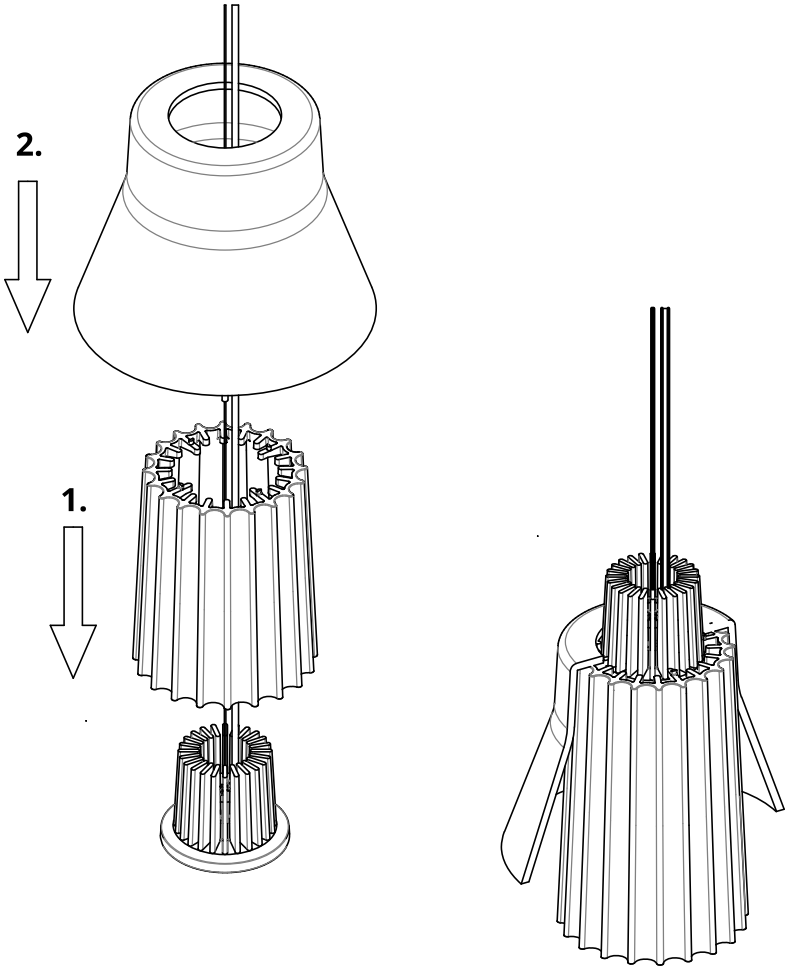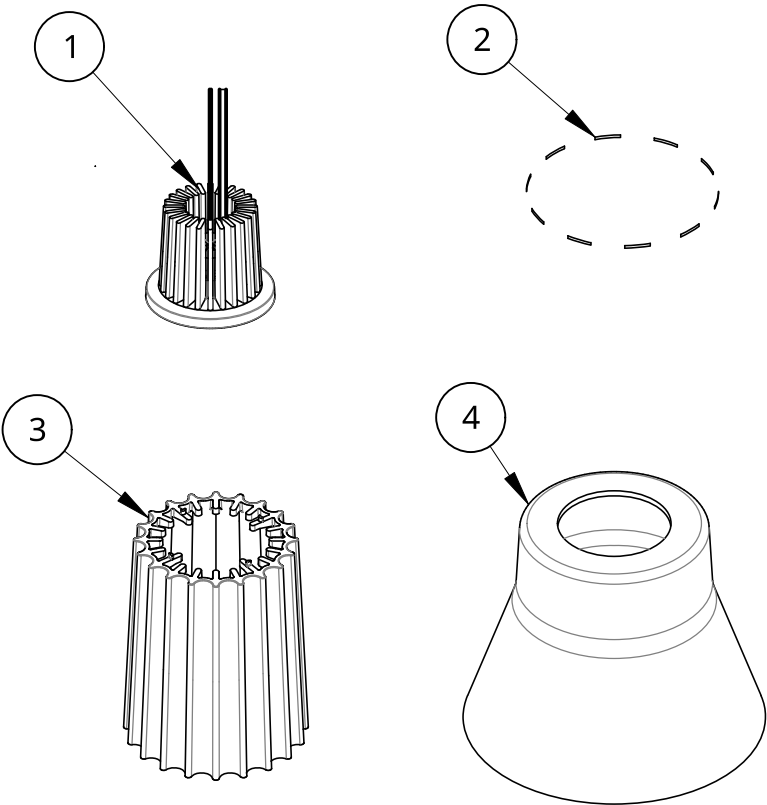

Glass Shown with Section View



Installation - Diffuser and Shade

- 1. Place Diffuser onto Heatsink.
- 2. Place Shade on top of Diffuser.

Item	QTY	Description
1	1	Assembly: Ample Heatsink Module
2	1	Canopy Kit
3	1	Ample Diffuser
4	1	Ample Glass Shade

Stem Mount


What's Included: Part Configurations May Vary

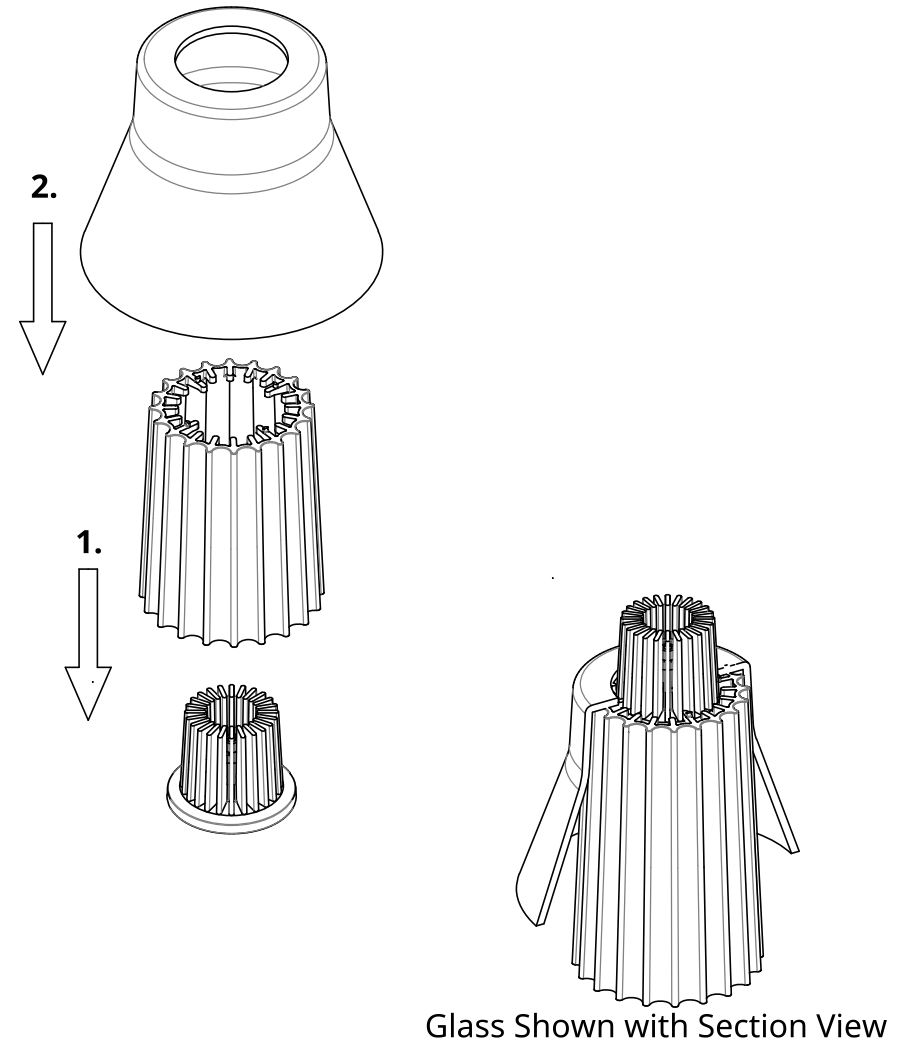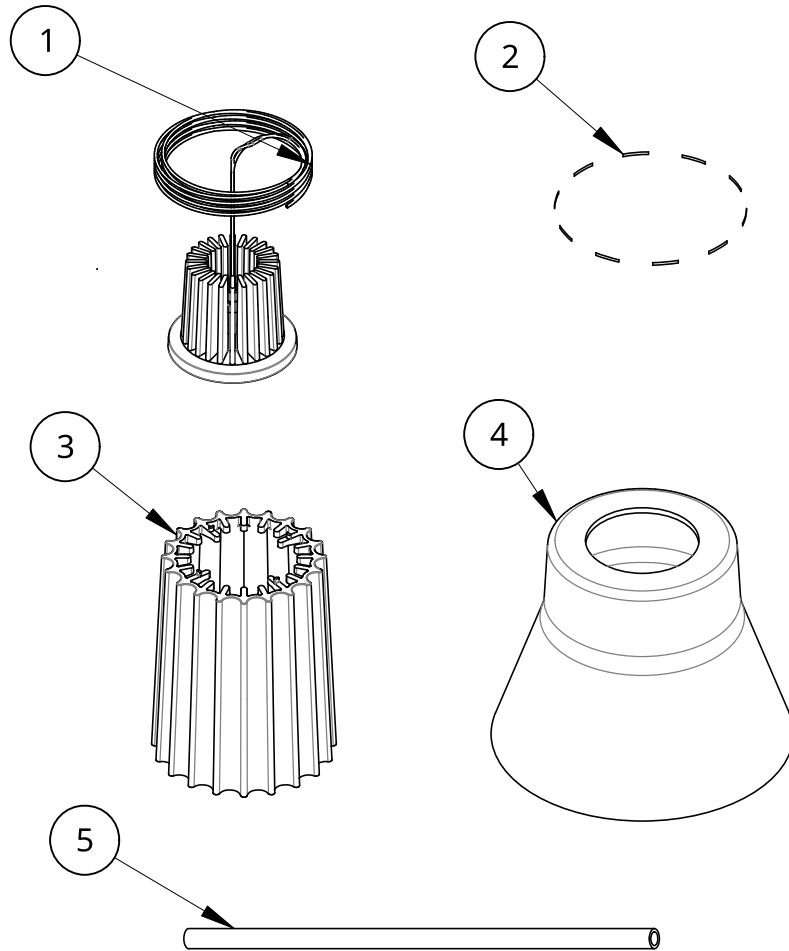


Installation - Diffuser and Shade

1. Place Diffuser onto Heatsink.
2. Place Shade on top of Diffuser.

Item	QTY	Description
1	1	Assembly: Ample Heatsink Module
2	1	Canopy Kit
3	1	Ample Diffuser
4	1	Ample Glass Shade
5	1	Stem

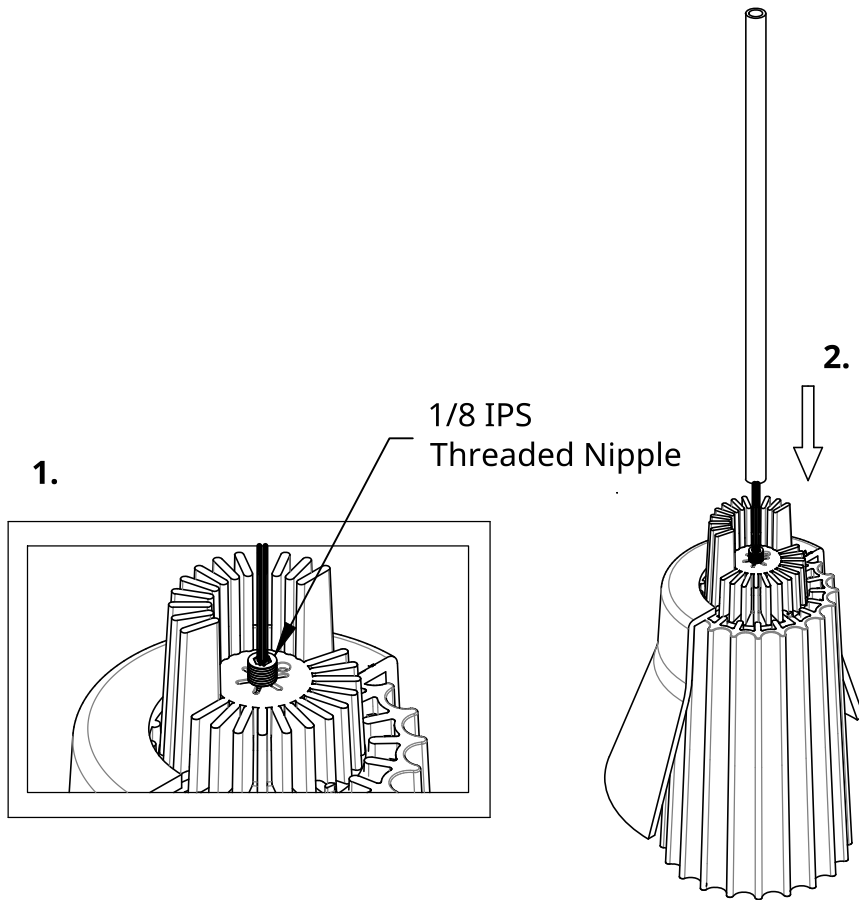


Parts Shown with Section View

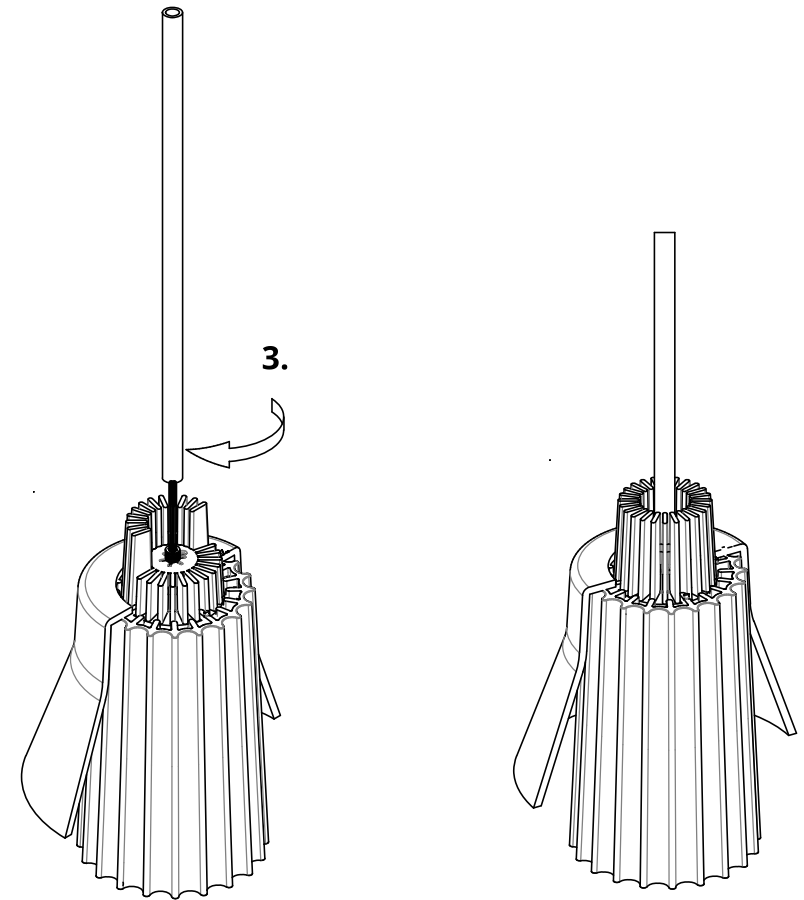


Parts Shown with Section View

Installation - Stem


1. Locate 1/8 IPS Threaded Nipple and Wires on Heatsink.
2. Pass Heatsink Wires Through Stem.
3. Thread Stem onto Heatsink Threaded Nipple.




Driver dimensions and location may vary, consult your order confirmation for details.

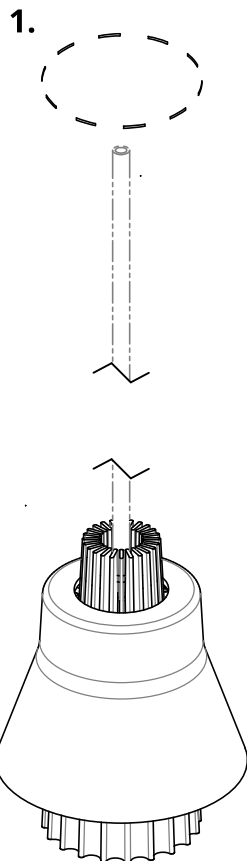

2.

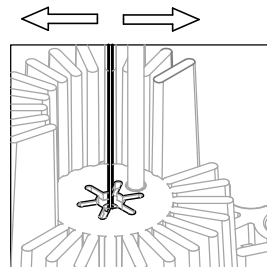

3.

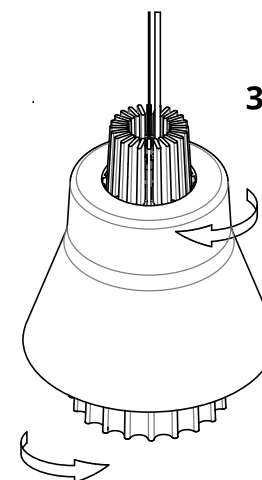

Installation - Canopy

1. Refer to the following supplementary instructions for Canopy installation details:

Canopy Type	Cable Mount Instructions Part Number	Stem Mount Instructions Part Number
Flat Canopy	14273	19624
Deep Canopy	13163	13517
Trimless Canopy	21796	22668

Installation - Leveling

2. Once the luminaire is suspended from the canopy, leveling can be performed by sliding the aircraft cable in the slots on top of the Heatsink.
3. If needed, rotate Shade or Diffuser to re-balance the luminaire as desired.
4. Congratulations! End of guide.