

SLIDE SCONCE 16

The classic geometric shape of our Slide Sconce is perfect for punctuating any space. The linen-clad shade is supported by an elegant bent brass arm through a pivoting joint that allows the Slide Sconce to be set at a variety of angles. Unaltered by hardware or finials, the shade comes to a refined point, creating its distinct and refined silhouette.

CARE | Clean lamp shade with compressed air, using a dry microfiber cloth or lint roller if necessary. Brass components can be cleaned using a soft, dry dust cloth, using gloves to protect wax finish.

DIMENSIONS/ WEIGHT

Variable depending on orientation
Typ 20.25" x 16.5" x 13"
1.5 lbs

BULB/ TECHNICAL SPECS

E26 G25 LED 6W DTW bulb
2700K-1800K, 90+CRI, 480 Lumens
Bulb lifespan 15K hours
7W, 2700K, 800 Lumens
90+CRI, bulb option available

CERTIFICATION

UL, cUL
JA8 Compliant

J-BOX SPECS

Connects to J-Box with ceiling cutout
under 5" DIA

VOLTAGE

120V/220V

FINISH OPTIONS



Brass
Black
Satin Nickel

DIMMABILITY

CL Dimmers Recommended
Dims to 10%
Recommended Models:
Lutron Diva: DVCL-153P
Lutron Skylark: SCL-153P
Lutron Maestro: MACL-153M

RAVENHILL STUDIO

323.977.8532
contact@ravenhillstudio.com

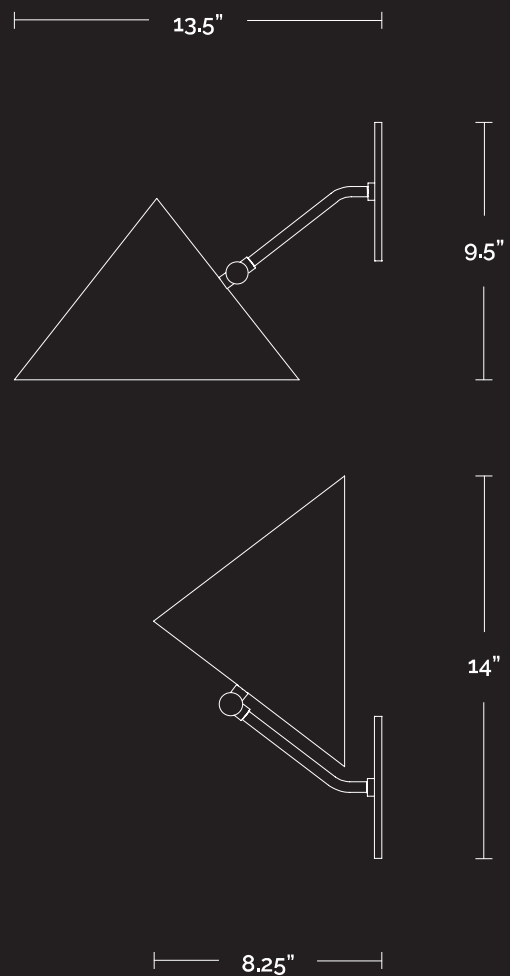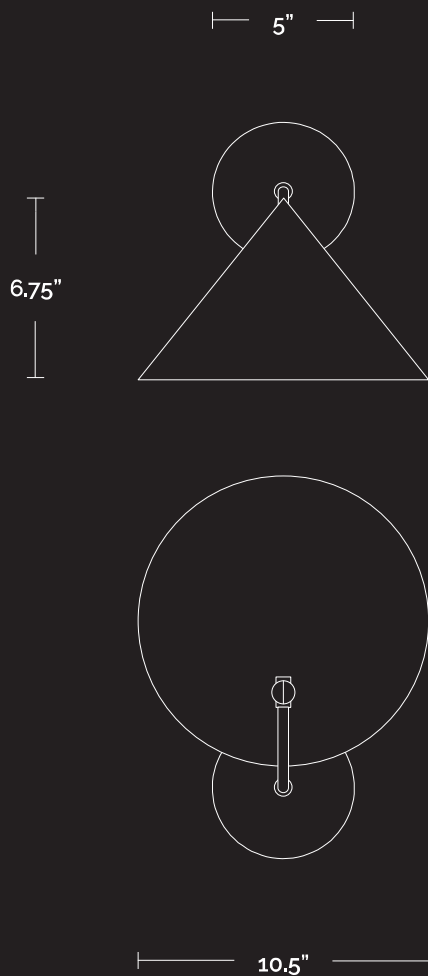

SLIDE SCONCE 10

The classic geometric shape of our Slide Sconce is perfect for punctuating any space. The linen-clad shade is supported by an elegant bent brass arm through a pivoting joint that allows the Slide Sconce to be set at a variety of angles. Unaltered by hardware or finials, the shade comes to a refined point, creating its distinct and refined silhouette.

CARE | Clean lamp shade with compressed air, using a dry microfiber cloth or lint roller if necessary. Brass components can be cleaned using a soft, dry dust cloth, using gloves to protect wax finish.

RAVENHILL STUDIO 323.977.8532
contact@ravenhillstudio.com

DIMENSIONS/ WEIGHT

Variable depending on orientation
Typ 13.5" x 10.5" x 9.5"
1.5 lbs

BULB/ TECHNICAL SPECS

E12 G16.5 LED 4W DTW bulb
2700K-1800K, 90+CRI, 400 Lumens
Bulb lifespan 15K hours
5W, 2700K, 450 Lumens
90+CRI, bulb option available

CERTIFICATION

UL, cUL
CE upon request
JAS Compliant

J-BOX SPECS

Connects to J-Box with ceiling cutout
under 5" DIA

VOLTAGE

120V
220V upon request

FINISH OPTIONS

Brass
Black
Satin Nickel

DIMMABILITY

CL Dimmers Recommended
Dims to 10%
Recommended Models:
Lutron Diva: DVCL-153P
Lutron Skylark: SCL-153P
Lutron Maestro: MACL-153M