



OUTDOOR CYLINDERS ONE-LIGHT OUTDOOR FLUSH MOUNT

7813801


General Product Information




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR/OUTDOOR




WET LOCATION SAFE




NEC COMPLIANT JUNCTION BOX




BULB(S) (NOT INCLUDED)




CONVERTS TO LED




INSTALL IN ADHERANCE WITH LOCAL ELECTRICAL CODES



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty




FCC Statement


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



CAULK GUN




LADDER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



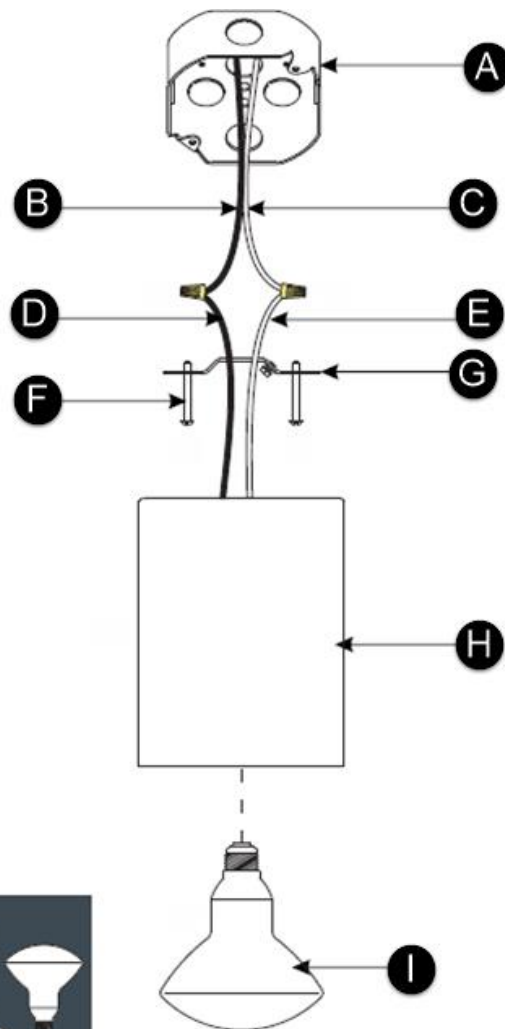

FIXTURE PARTS

- A. Junction box
- B. Hot Power Line Wire
- C. Neutral Power Line Wire
- D. Black Fixture Wire
- E. White Fixture Wire.
- F. Mounting Screws
- G. Mounting Plate
- H. Fixture
- I. Bulb (Not Included)

For item # 7813801, use **MAX** 120 volt
65 Watt Type BR30 Medium Base Lamp.

For item # 7813901, use **MAX** 120 volt
100 Watt Type BR40 Medium Base Lamp.

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box with the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Carefully tuck all the wires into the junction box.

Installing the Fixture

1. Align the key slots on the fixture base to the mounting plate studs, place the fixture base onto the mounting plate, and secure it by rotating it to the narrow portion of the keyed slot.
2. Screw the bulb into the socket to finish installation. Refer to the socket label for max wattage information.