

Leo Semi-Flush Mount

7518-220,7501801-220 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

SAVE THESE INSTRUCTIONS!

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer.
LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

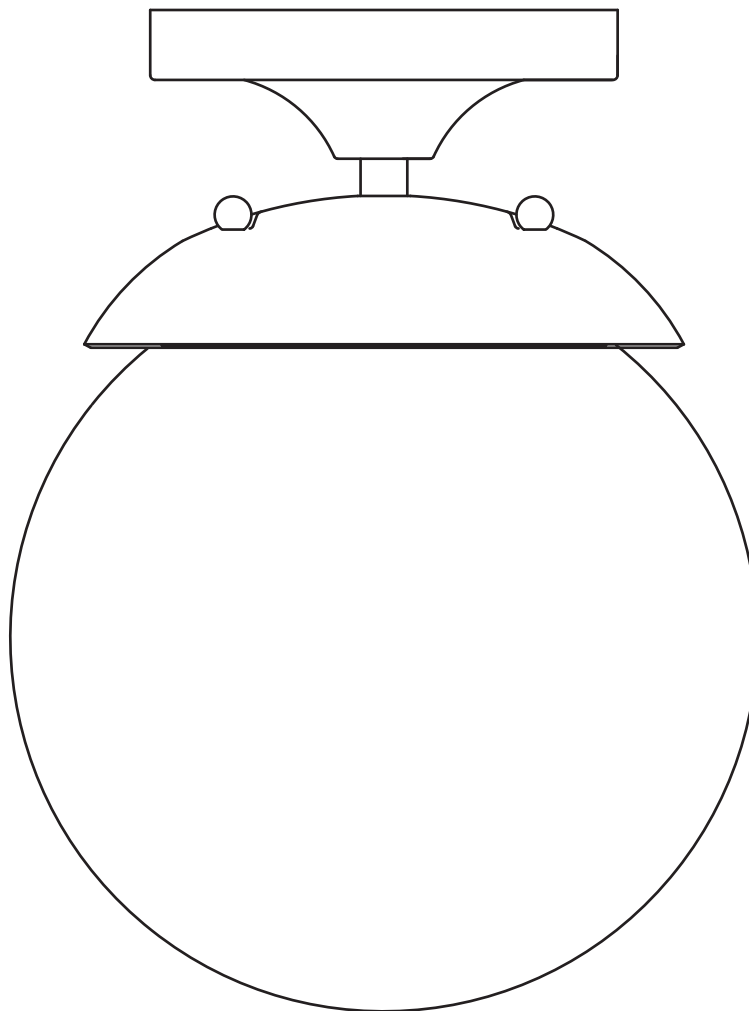

Install the Fixture

IA

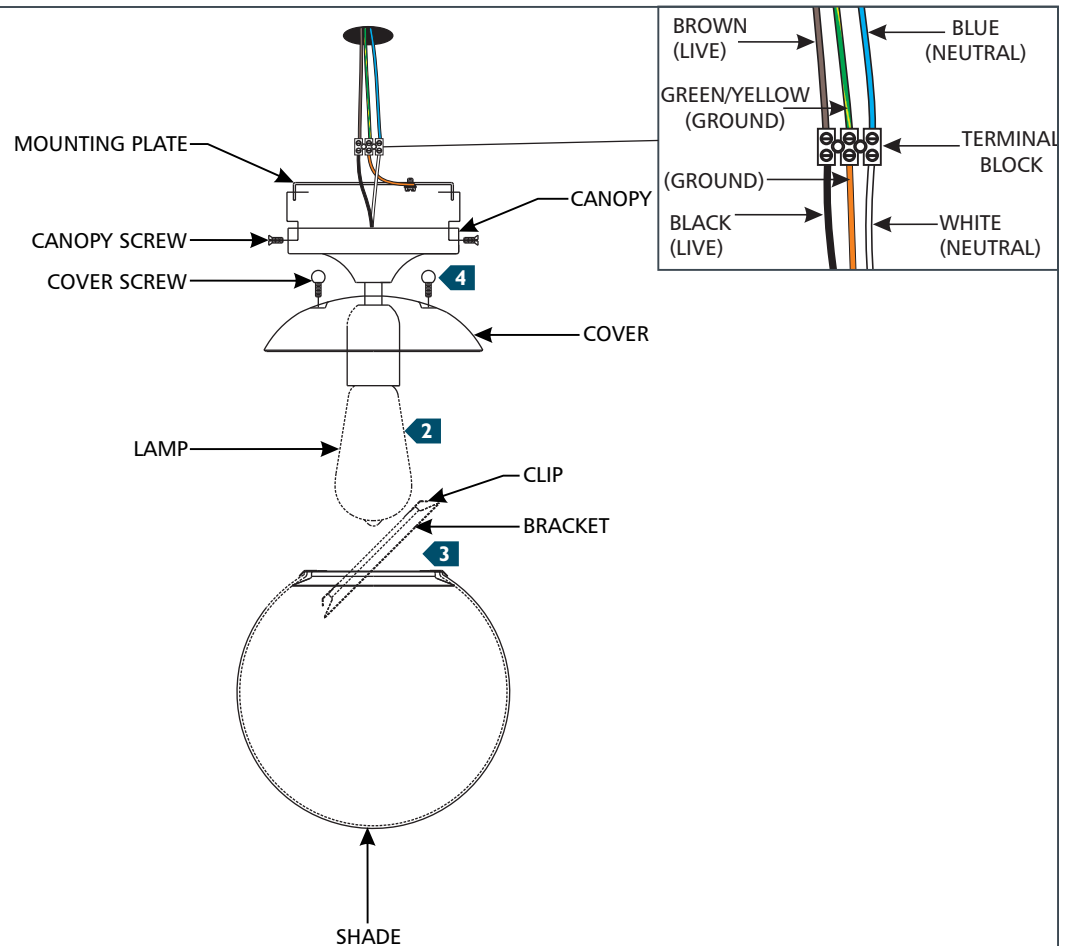

- 1** Secure the mounting plate to the junction box.
- 2** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage information.
- 3** Install the shade bracket:
 - A) Lift up the clips on the shade bracket.
 - B) Insert the shade bracket into the shade at an angle.
 - C) Snap the clips back down onto the top of the shade.
- 4** Align the holes on the shade bracket with the holes on the cover and secure it in place with the shade screws.
- 5** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 6** Connect the blue (neutral) 220-240V wire to the terminal port connected to the white wire.
- 7** Connect the brown (live) 220-240V wire to the terminal port connected to the black wire.
- 8** Neatly place the terminal and all the wires into the ceiling/canopy, place the canopy onto the ceiling, and secure it in place using the canopy screws.