# Zire Chandelier

# VISUAL COMFORT & CO.

STUDIO COLLECTION

#### 990CH3190309-ZIR

## 3190309 1.0

### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

# VISUAL COMFORT & CO.

7400 Linder Ave, Skokie, IL 160077 800.969.3347


#### www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

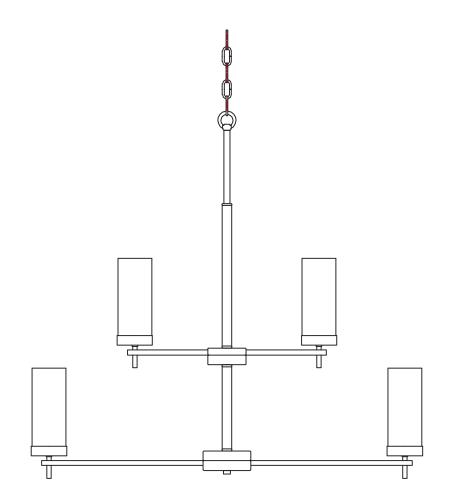

## **SAVE THESE INSTRUCTIONS!**

## Install the Fixture

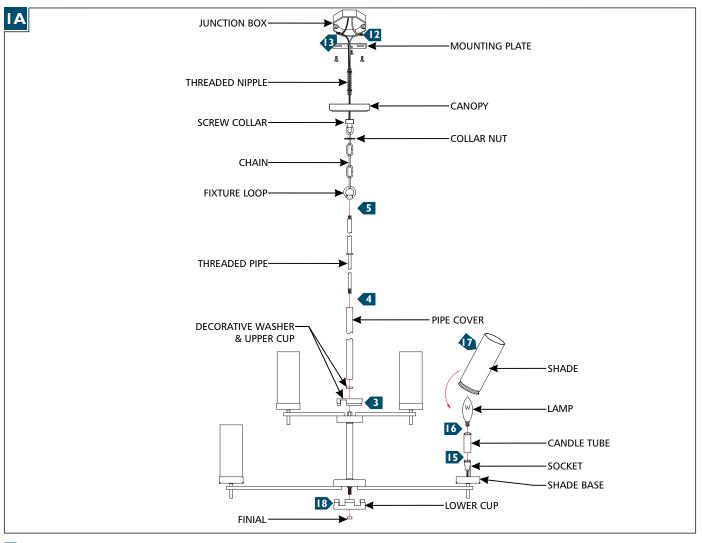

- If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2 Secure the mounting plate to the junction box.
- 3 Feed the fixture wires through the upper cover and decorative washer, then install them to the top of the fixture.
- 4 Insert the threaded pipe into the pipe cover, then feed fixture wires through the pipe and screw it onto the top of the fixture.
- **5** Feed the fixture wires through the fixture loop and screw it onto the threaded pipe.
- 6 Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 7 Open the chain link with pliers and install the chain on the fixture loop, then re-close the chain link.
- 8 Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
- 9 Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture, re-close the link with pliers.
- Weave the cord through the chain, collar nut, canopy, screw collar, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.
- Install the candle tubes by sliding them over the sockets.
- **I6** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- Place the shade over the socket and into the shade base ensuring that it is secured by the spring clips inside the base. Repeat for remaining shades.
- Install the lower cup to the bottom of the fixture and secure it in place using the finial.