

Foxdale 5, 9 Light & 6 Light Linear Chandelier

310930_, 3609306

1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.




This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

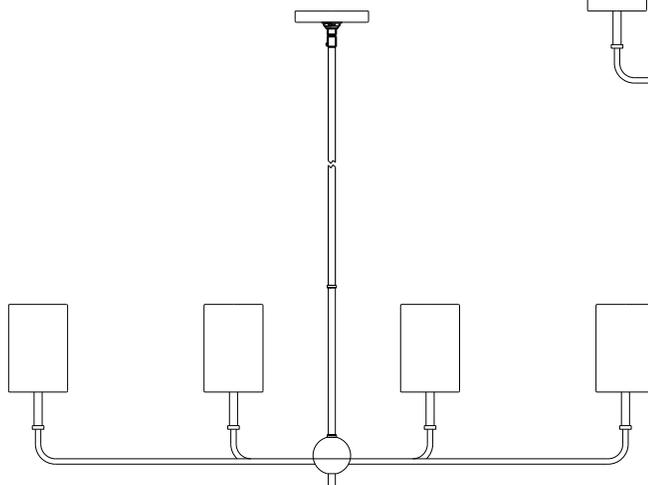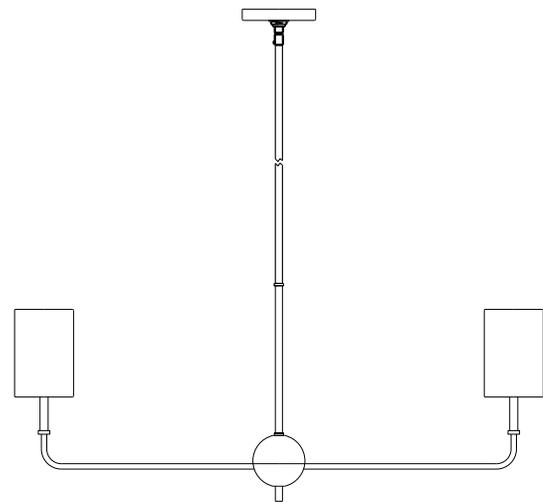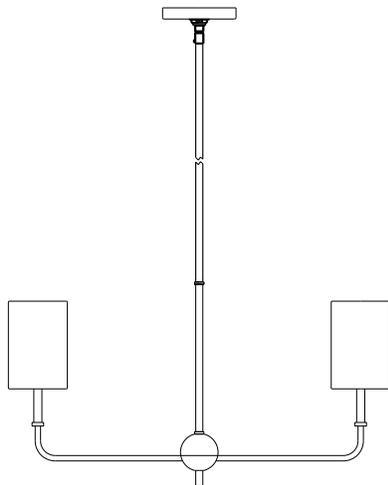

VISUAL COMFORT & Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

www.visualcomfort.com

Install the Fixture

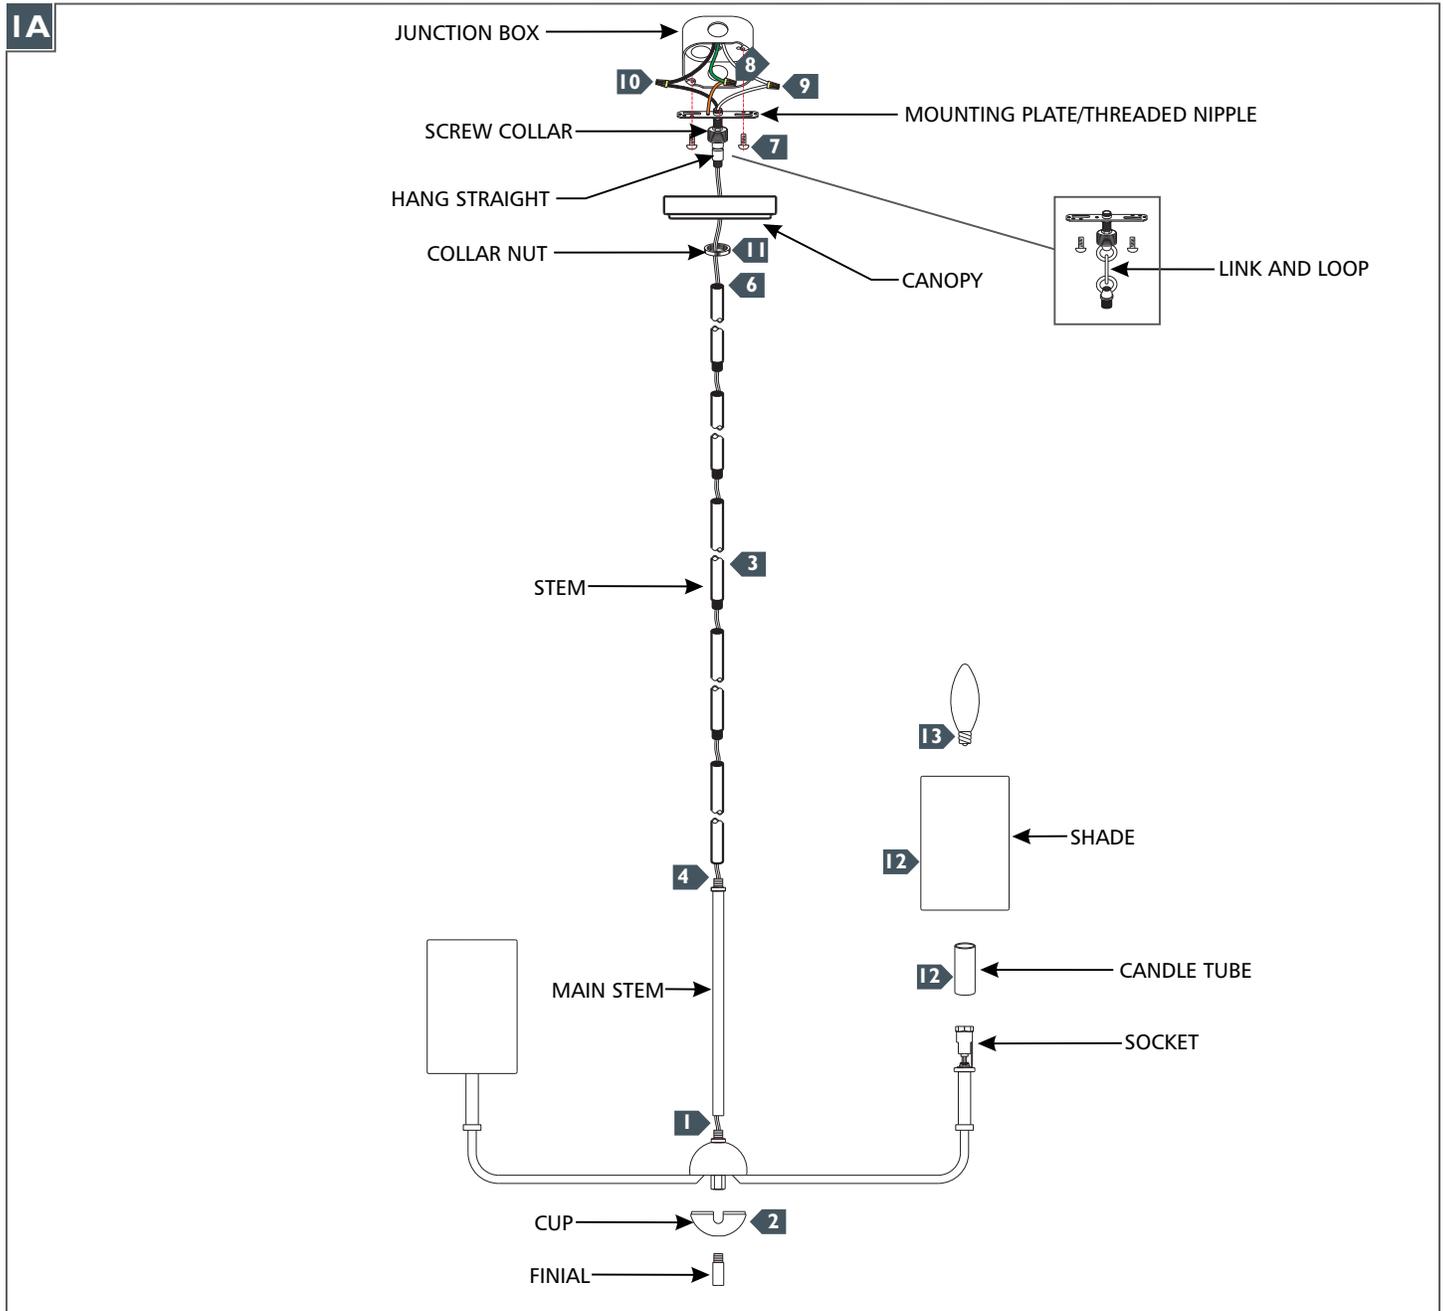

- 1** Feed the fixture wires through the main stem and screw it to the fixture.
- 2** Install the cup onto the bottom of the fixture and secure it in place with the finial.
- 3** Determine the wanted height or look of the fixture with the provided stems, hang straight and/or link and loop, and assemble them by screwing them together. **NOTE: Use hang straight for standard ceilings and use link and loop for sloped ceilings.**
- 4** Feed the fixture wires through the stem assembly and screw it to the main stem.
- 5** Unscrew the collar nut off the screw collar and slide it onto the stem assembly, followed by the canopy.
- 6** Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the hang straight or link and loop.
- 7** Align and secure the mounting plate to the junction box.
- 8** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 9** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 10** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 11** Neatly place all the wires into the junction box, place the canopy onto the ceiling and secure it in place with the collar nut.
- 12** Place the candle tubes over the sockets, followed by the shades.
- 13** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.