

# Dearborn Flush Mount

7529693S, 7629693S | 1.0

## VISUAL COMFORT & Co.

STUDIO COLLECTION

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

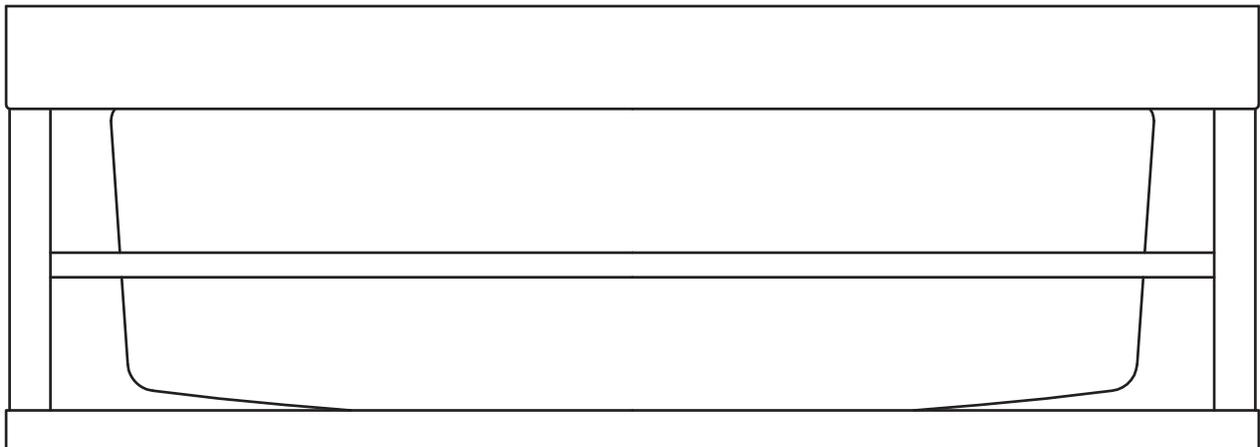

VISUAL COMFORT & Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

IA

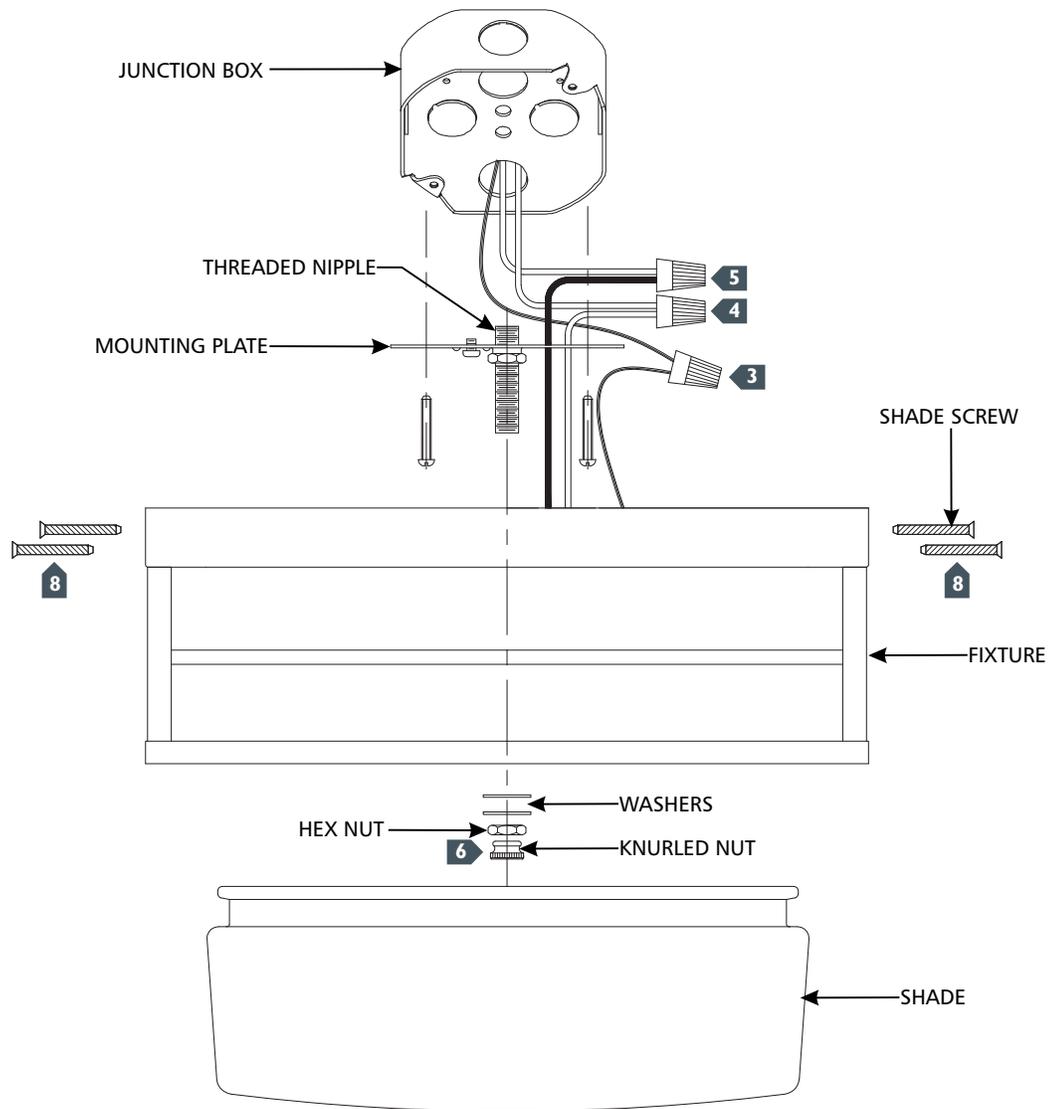

- 1 If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2 Secure the mounting plate to the junction box.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 6 Properly tuck the wires into the junction box, place the fixture base and washers onto the threaded nipple, and secure them in place by screwing the hex nut onto the threaded nipple. Screw the knurled nut onto the threaded nipple.
- 7 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 8 Install the shade to the fixture and secure it in place using the shade screws.