




DOME PENDANT


Installation Instructions

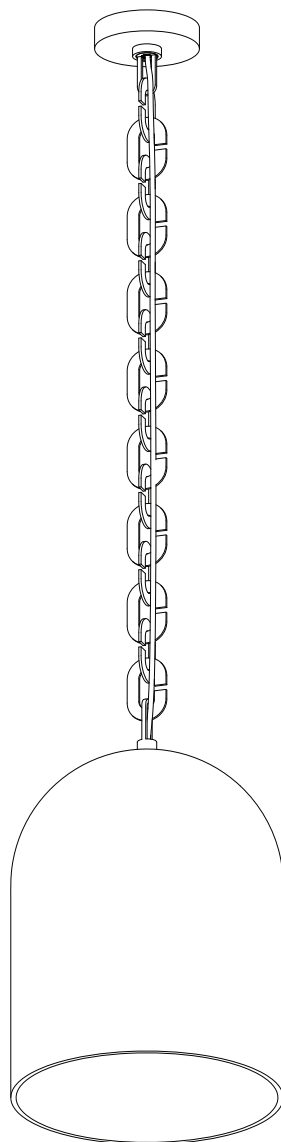

SkLO

sklo.com

SkLO US 115 WEST NORTH STREET HEALDSBURG CALIFORNIA 95448 USA +1.707.385.2101 us@sklo.com
SkLO EU VÁŽNÍ 488 500 03 HRADEC KRÁLOVÉ CZECH REPUBLIC +420.495.542.071 eu@sklo.com




DOME PENDANT











Congratulations on your purchase of a SkLO Dome Pendant. This product must be installed in accordance with the applicable codes by a person familiar with the construction and operation of the product and the hazards involved, preferably a licensed electrician. Use a maximum 60W bulb.

When unpacking individual items and parts of the light fixture, make sure to lay them out on a protective surface that will neither mar the delicate metal finishes nor scratch the glass. Gloves (nitrile) are provided and must be worn during installation to avoid fingerprints on the finish of the exposed metal parts.

Your SkLO fixture will arrive with the hand-blown glass elements packed separately from the light fixture itself.



CONTENTS:

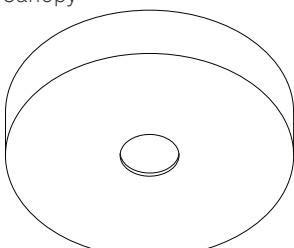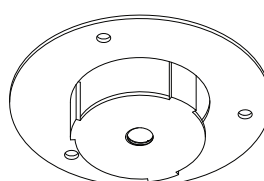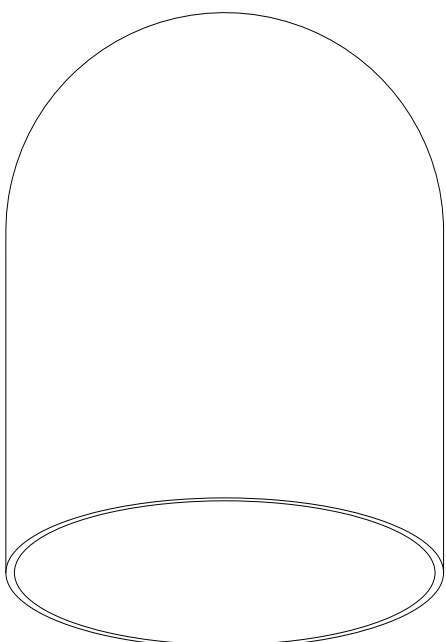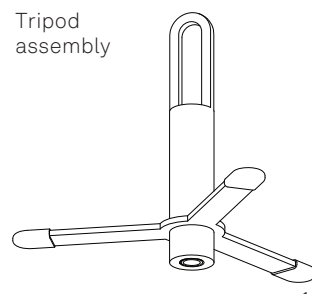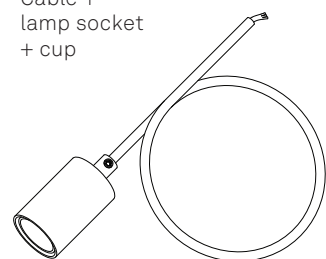Canopy	Loop anchor	Mounting plate	Chain link
			
1x		1x	quantity varies*
Glass dome		Tripod assembly	Cable + lamp socket + cup
			
		1x	1x
	Strain relief	Wire connector	Light bulb
			
	1x	1x	3x
			1x




1. Position the mounting plate over the electrical leads on the ceiling in a way that the central opening in the plate and leads are aligned. Install the mounting plate directly to the ceiling using fasteners/anchors (not provided) that are appropriate to the ceiling material being fastened to and to support the approximate 10 kg (for Dome 17 Pendant) or 17 kg (for Dome 22 Pendant) weight of the fixture (Figure 1).
2. Attach the loop anchor to the mounting plate by threading the exposed nipple threaded in the loop anchor. Thread fully until tight (Figure 2a). Slide the canopy up over the anchor loop and secure it in place by threading on a threaded ring (Figure 2b).
3. Assemble the chain by sliding chain links onto each other. Take great care when assembling the chain so that chain links do not scratch (Figure 3).
4. Carefully pass the fabric-wrapped electrical cord through the hole in the tripod assembly in a direction from the bottom towards the loop on the top. Pass the tripod assembly with the cord through the hole on the top part of the glass dome diffuser. Carefully hook the chain to the loop on the top of the assembly (Figure 4).
5. Carefully raise the fixture by the chain and hook the chain link on the free end to the loop anchor. Unthread the threaded ring below the canopy and carefully lower the canopy until it sits on the chain (Figure 5).
6. Carefully feed the fabric-wrapped electrical cord through all parts of the canopy assembly in the following order: 1. threaded ring, 2. canopy, 3. loop anchor. Pull the end of the cord all the way out to have easy access to the exposed leads. Slide plastic strain relief over the end of the cord and fix the length of the cord by tightening set screw – do not overtighten or damage the electrical cord and insulation. Connect the exposed leads of the fixture to the exposed leads on the ceiling following the wiring diagram and using the provided wire connectors. Attach the ground (TE) wires to ground (TE) wires of the light fixture, phase 1 (L1) to phase 1 (L1) of the light fixture, neutral (N) to neutral (N) of the light fixture (Figure 6). Please note the number and type of wire connectors may vary.


*Proposed appropriate length of the exposed cord below the tripod assembly is 65 mm for Dome 17 Pendant and 115 mm for Dome 22 Pendant.
7. Raise the canopy up all the way flush to the ceiling taking care that no electrical cables or connections are exposed where the canopy meets the ceiling. Fasten the canopy to the loop anchor by threading on the threaded ring (Figure 7).
8. Install the supplied LED light bulb (60W Max) into the socket (Figure 8).




1.

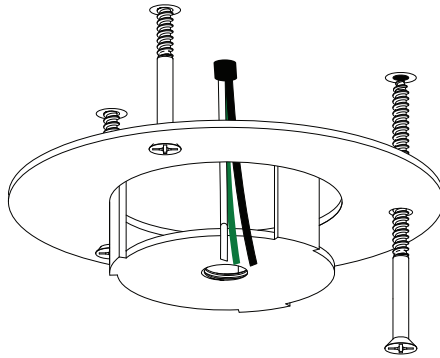



2a.

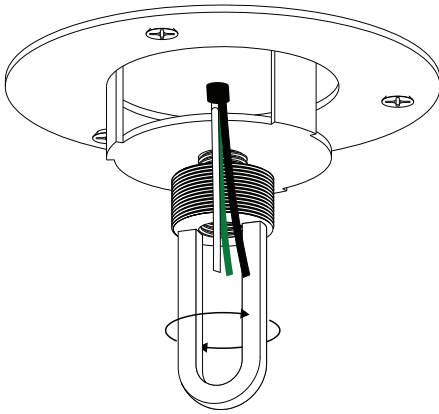



2b.

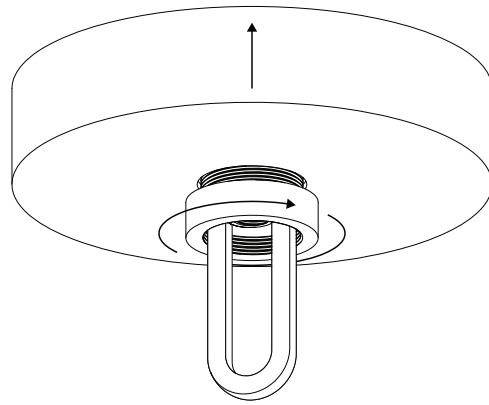

3.

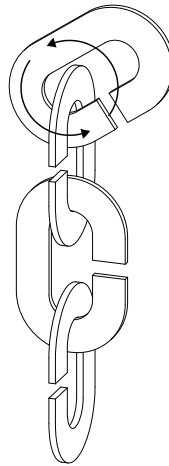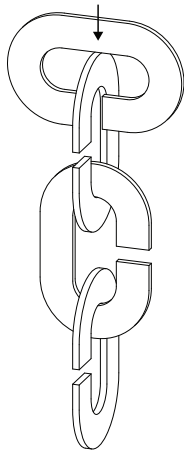


4.

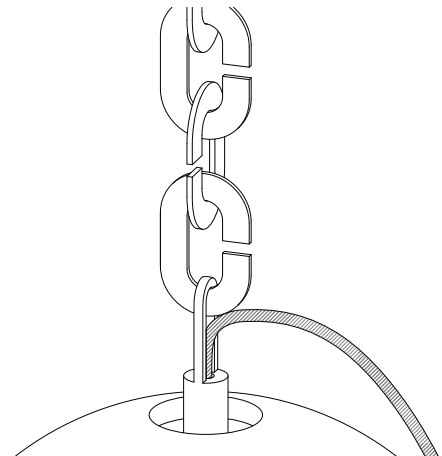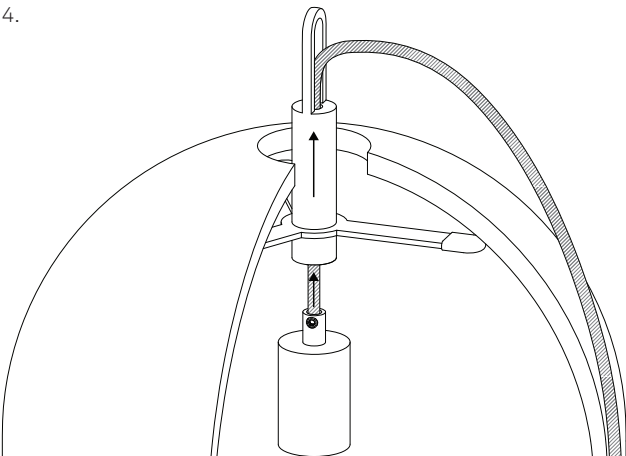





5.

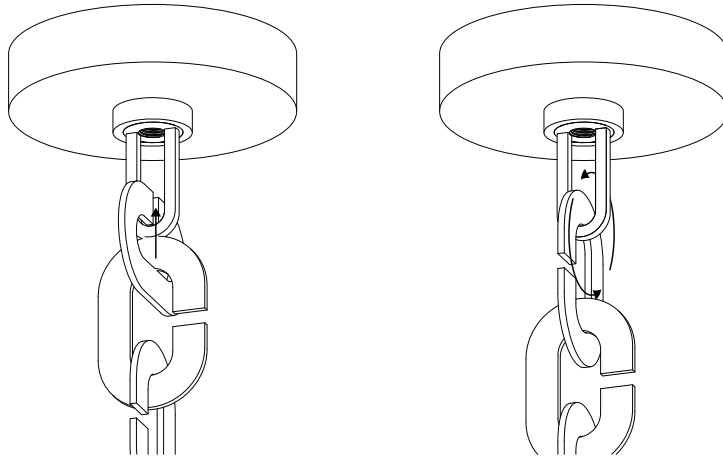

6.

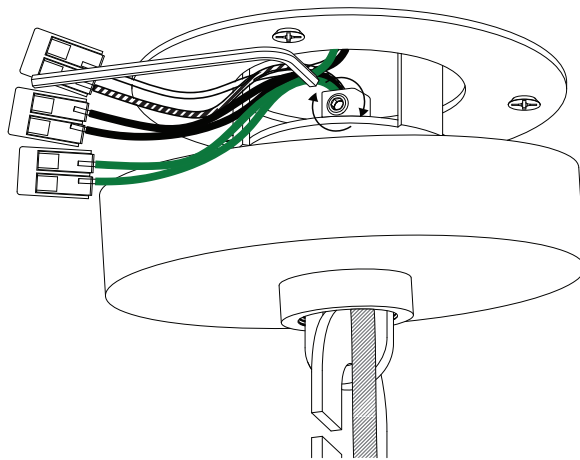

7.

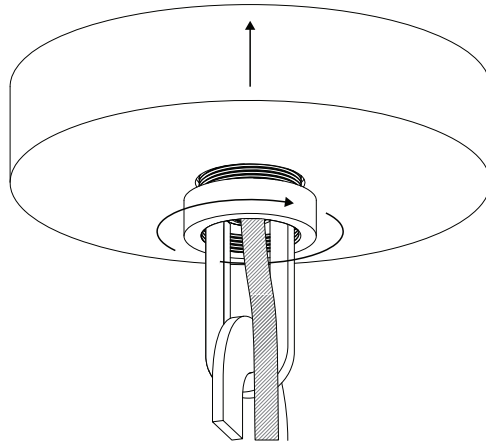

8.

