




POPPY SUSPENSION 14 FREE-STANDING

- Light Source: 14 X 3,2 W Integrated LED 100 ~ 240 Vac/24 - 6.300 Lumen - 3000 or 2700 Kelvin
- Dimmable: PWM, 0-10 or Triac Trailing Edge
- Materials: Lentiflex®, red-painted brass stems
- Weight: net 4,18 lbs - gross 9,24 lbs PWM version
net 3,3 lbs - gross 8,36 lbs TRIAC version
- Packaging: 31,39 x 15,6 x h. 5,85 in
31,39 x 15,6 x h. 5,85 in
12,09 x 11,11 x h. 2,34 in

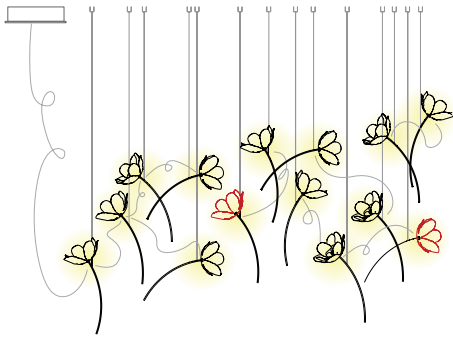

MAIN COPPER ELECTRIC WIRE
max 300 cm (117")


COPPER ELECTRIC WIRE
max distance from one poppy
to another max 80 cm (31")

ADJUSTABLE STEEL CABLES
min 20 cm (7-3/4")
max 300 cm (117")

FINISH	PRODUCT CODE	CANOPY DETAILS
 PRISMA/RED	POPSL00PRR03SLD000US 3000 KELVIN TRIAC	TRIAC Ø5,46 x h. 9,9 in 
	POPSL00PRR03SLD27KUS 2700 KELVIN TRIAC	
	POPSL00PRR03SLD000US 3000 KELVIN PWM	
	POPSL00PRR03SLD27KUS 2700 KELVIN PWM	
	ACCESSORIES	PWM Ø7,41 x h. 1,95 in 
	6M CABLE KIT (<i>must be ordered with lamp</i>)	
	DALI	
	CASAMBI	

POPPY SUSPENSION 7 FREE-STANDING

- Light Source: 7 X 3,2 W Integrated LED 100 ~ 240 Vac/24 - 3.150 Lumen - 3000 or 2700 Kelvin
- Dimmable: PWM, 0-10 or Triac Trailing Edge
- Materials: Lentiflex®, red-painted brass stems
- Weight: net 3,3 lbs - gross 6,16 lbs PWM version
net 0,39 lbs - gross 5,06 lbs TRIAC version
- Packaging: 31,39 x 15,6 x h. 5,85 in
12,09 x 11,11 x h. 2,34 in

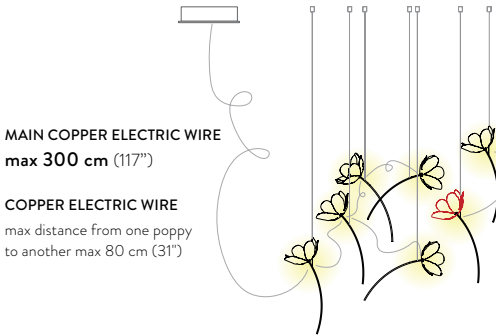

MAIN COPPER ELECTRIC WIRE
max 300 cm (117")

COPPER ELECTRIC WIRE
max distance from one poppy
to another max 80 cm (31")

ADJUSTABLE STEEL CABLES
min 20 cm (7-3/4")
max 300 cm (117")

~ 13 cm (~ 5")
~ 6 cm (~ 2 3/8")
35 cm (13 - 3/4")

FINISH	PRODUCT CODE	CANOPY DETAILS
 PRISMA/RED	POPSM00PRR03SLD000US 3000 KELVIN TRIAC	TRIAC Ø5,46 x h. 9,9 in 
	POPSM00PRR03SLD27KUS 2700 KELVIN TRIAC	
	POPSM00PRR03SLD000US 3000 KELVIN PWM	
	POPSM00PRR03SLD27KUS 2700 KELVIN PWM	
	ACCESSORIES	PWM Ø7,41 x h. 1,95 in 
	6M CABLE KIT (<i>must be ordered with lamp</i>)	
	DALI	
	CASAMBI	

