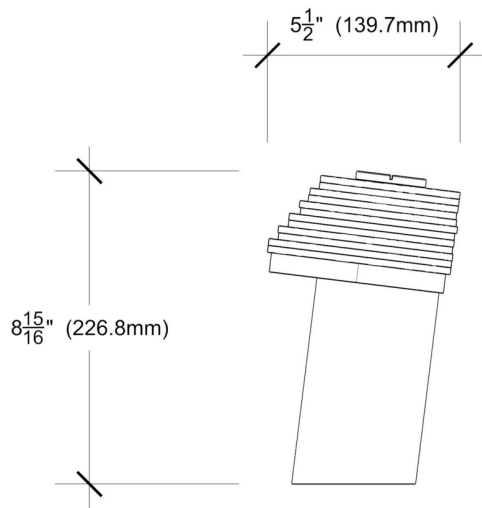


Tilt

06

SA-A-TILT-06



PERFORMANCE PROFILE

LED color temperature:
2200, 2700, 3000, 3500

Driver location:
Small USB C driver, fabric-wrapped
cable, black

Dimming control:
Touch on/off/dim

Voltage:
12V DC (USB-C PPS)

Lumens delivered:
350




Watts: 4W


Weight: 2 lbs



Sabins: 0.15

Dimensions: 5 1/4" W x 5 1/4" D x 9" H

COLOR MOOD Select One Colour Mood

							
Champagner	Salbei	Silber	Weiß	Sand Dollar	Oat	Champagne	Ceppo Di Mere

							
Weinrot	Augergine	Terracotta	Maigrün	Maroon	Honeydew	Black	Belvedere

							
Indigo	Traube	Stahl	Petrol	Lagune	Ozean	Clear	Cristallo White

NOTES

Application: DryLead Time: 6-10 weeks

Maintenance: Lint roll occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface.