
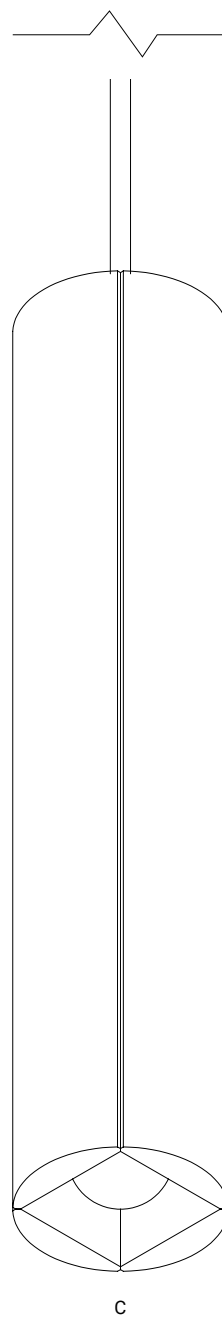
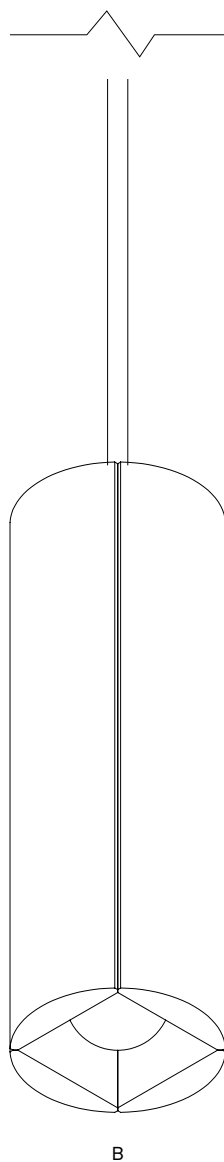


PILLAR PENDANT A,B,C

INSTALLATION INSTRUCTIONS
WITH METAL STEM

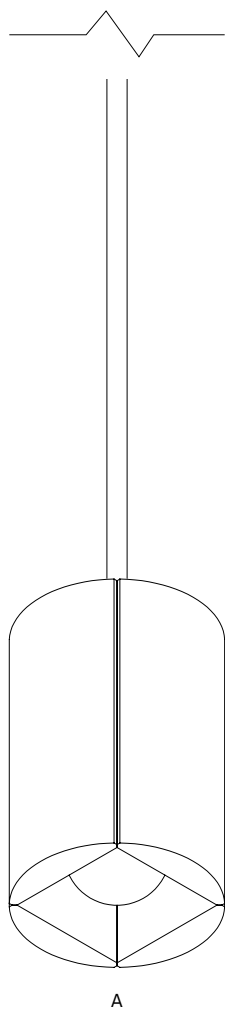


INSTALLATION OVERVIEW


PARTS + NOTES

CAUTION

Make sure building power is disconnected prior to handling wires. Installation should be done by a certified electrician.

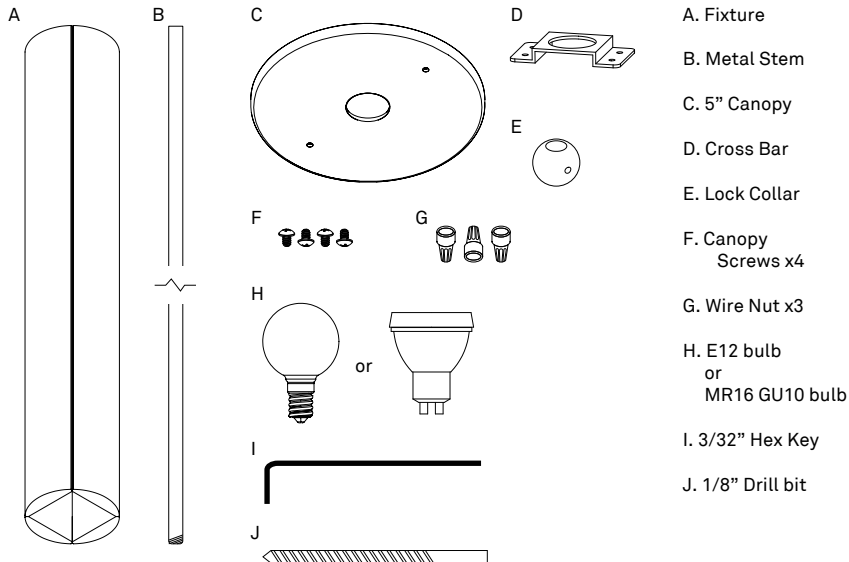**NOTE:**

Requires octagonal J-box to mount with canopy bracket.

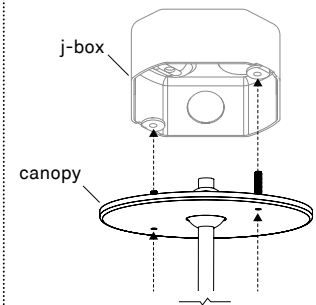

FIXTURE INSTALLATION

1**Prepare Stems**

Calculate the stem length for your desired fixture height. Trim stem length accordingly, leaving one end threaded.


Remove the set screw in lock collar (E) using the hex key (I). Position shaft collar 1/4" offset from the end of the cut end of stem. Use it as a guide to drill a hole in the stem with provided drill bit (J). Remove any burred edges from the inside of the stem. Attach the shaft collar to the stem. Ensure the dog nose set screw engages the hole.



Tube Cutter



Hacksaw

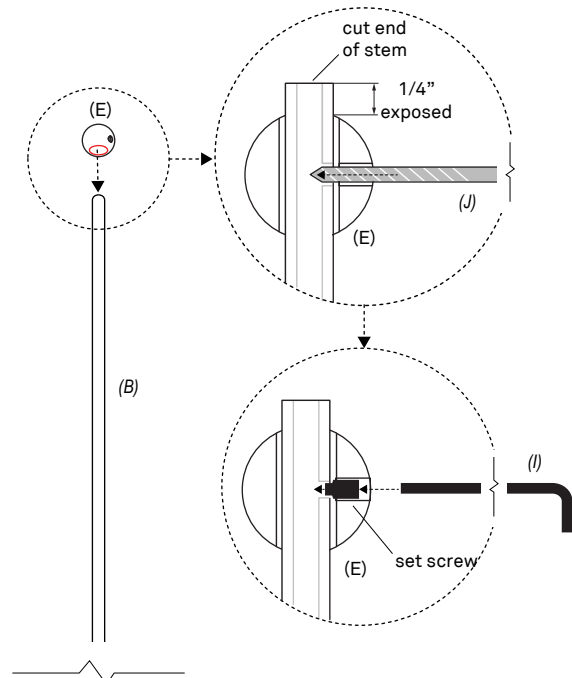

FIXTURE INSTALLATION

CAUTION

Make sure building power is disconnected prior to handling wires. Installation should be done by a certified electrician.

2

Connect Stems to Fixture


Slip the threaded end of the stems through canopy (C) and secure collar shaft (E) between Cross Bar (D) and Canopy (C) using Screws (F).

Thread the wires from fixture (A) through the stem and thread stem (B) to fixture.

3

Connect Wires


This step requires two people. Make sure breaker is off before handling wires. Support the fixture from below. Connect the wires from the fixture to the building supply.

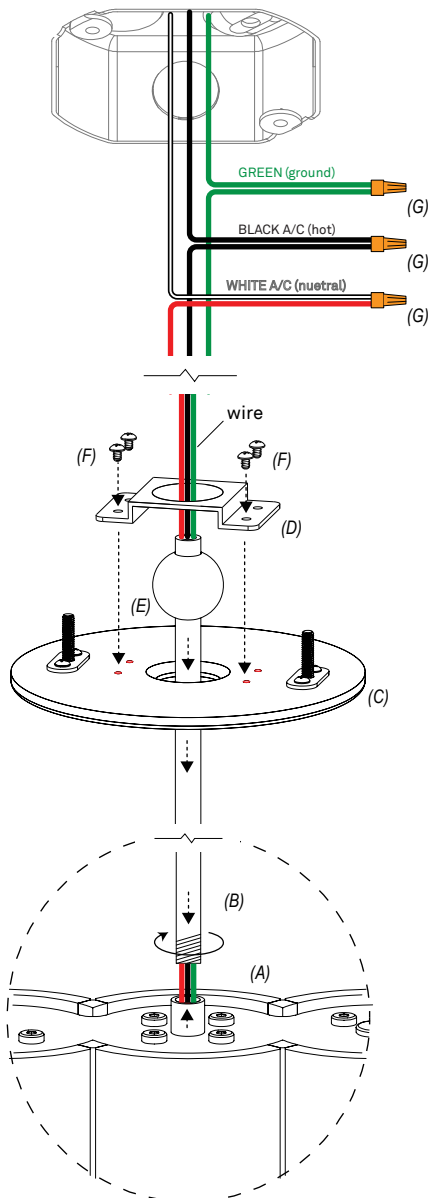

4

Attach Canopy

This step requires two people. Using the protruded screws attached, screw the canopy to the j-box through the small front holes with

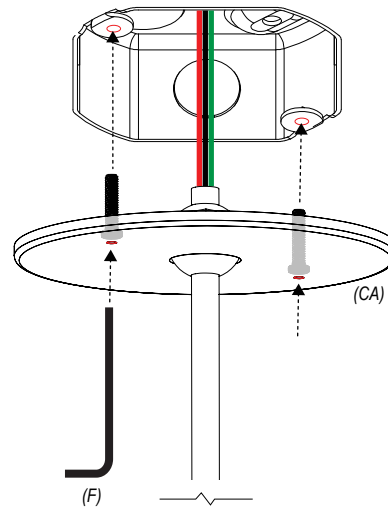

7

Install Bulb

Screw in E12 Bulbs (H) provided.

