







## KEATON SMALL, MEDIUM, & LARGE VANITY


4465002; 4565002; 4665002

### General Product Information



Product Warranty

### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

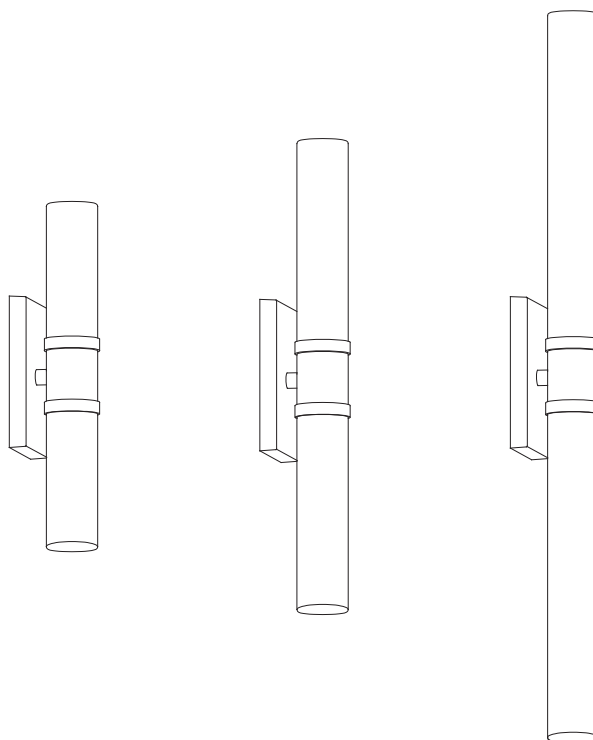

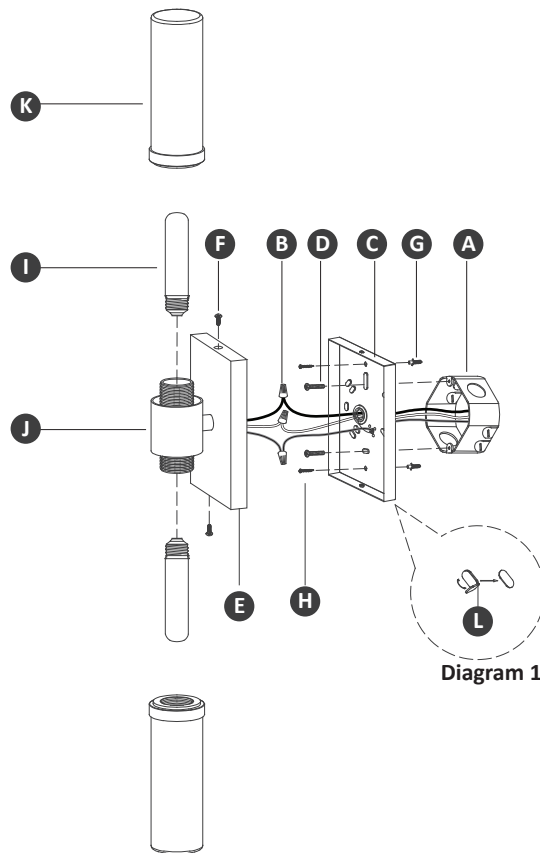

## FIXTURE PARTS

- A. Junction Box (Not Included)
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Fixture
- F. Fixture Screws
- G. Anchor Screws
- H. Anchors
- I. Light Bulbs (Not Included)
- J. Sockets
- K. Shades
- L. Knockout Tab

## INSTRUCTIONS

### I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging. Carefully place all parts on a clean, soft surface.
2. Remove the fixture screws to separate the mounting plate from the fixture.
3. Align the mounting plate with the junction box and mark the anchor positions. Using a drill bit slightly smaller than the anchors, drill holes at the marked locations, then tap the anchors into the holes with a hammer until they are flush with the surface.
4. Attach the mounting plate to the junction box using the mounting screws, then insert the anchor screws into the anchors to securely fasten the mounting plate to the wall.

**NOTE:** If necessary, remove the knockout tab from the mounting plate (see diagram 1).

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to a suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a. Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
  - b. Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)

### III. Installing the Fixture

1. Secure the fixture to the mounting plate with the fixture screws.
2. Install the bulbs (not included) into the sockets. Refer to the socket label for the maximum wattage rating.
3. Thread the shades to the sockets.