

## HOWELL MEDIUM PENDANT LANTERN

DJO1051

### General Product Information



Intertek




STANDARD  
INSTALLATION



INDOOR/  
OUTDOOR



DAMP LOCATION  
SAFE



NEC COMPLIANT  
JUNCTION BOX



CLEAN WITH SOFT,  
DRY CLOTH ONLY -  
NO HARSH CHEMICALS!



CONVERTS TO  
LED



SAVE THESE  
INSTRUCTIONS!

### Tools Required



PHILLIPS-HEAD  
SCREWDRIVER



WIRE CUTTER

### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



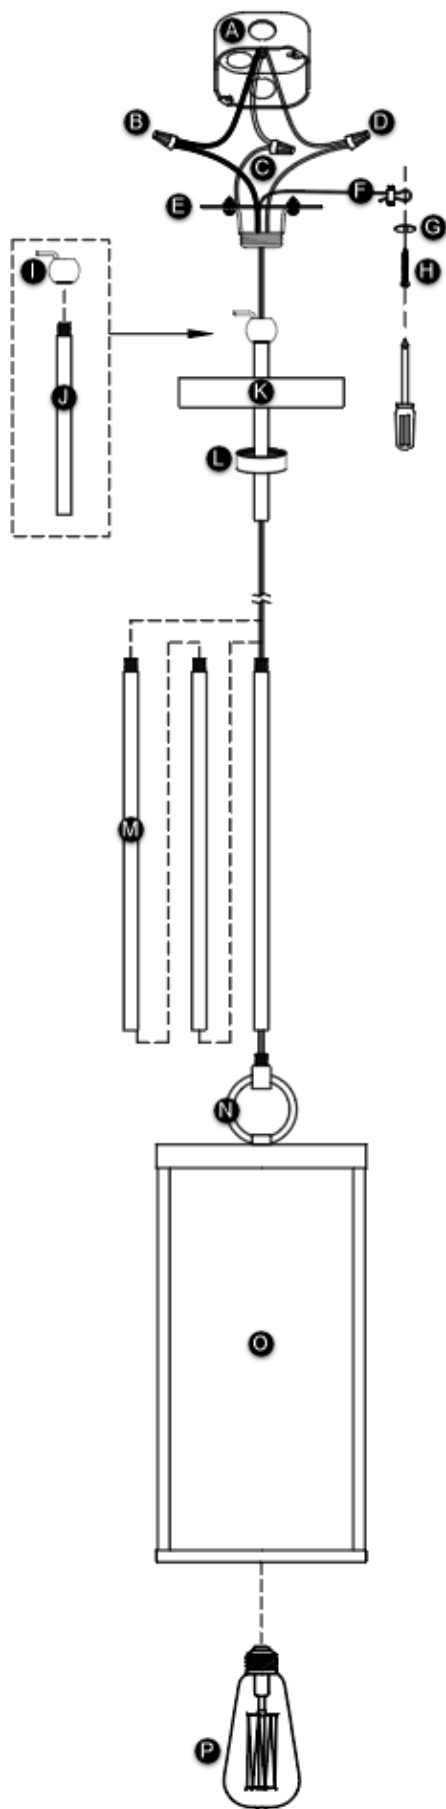

## FIXTURE PARTS

- A. Junction Box
- B. Ground Wire
- C. Neutral Wire
- D. Hot Wire
- E. Mounting Plate
- F. Safety Cable
- G. Washer
- H. Screw
- I. Half Ball
- J. Top Stem
- K. Canopy
- L. Collar Nut
- M. Stem Assembly
- N. Fixture Ring
- O. Shade
- P. Lamp

## **INSTRUCTIONS**

### **I. Preparing the Fixture**

1. Screw the half ball to the top of the stem assembly.
2. Determine the desired height of the fixture and assemble the stems accordingly by screwing them together.
3. Feed the fixture wires and safety cable through the stem assembly.
4. Screw the stem assembly onto the top of the fixture.
5. Thread the fixture wires and safety cable through the collar nut, canopy, and half ball assembly and screw it onto the stem assembly.
6. Align and secure the mounting plate to the junction box and slide the half ball assembly onto the mounting plate.
7. Loop the safety cable over a secure and solid structure that agrees with the local building code.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (round and smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (square and rigid) and neutral power line wire from the junction box (neutral to neutral)
5. Carefully tuck all wires into the junction box.

### **III. Installing the Fixture**

1. Affix the fixture canopy to the mounting plate by screwing the collar nut securely onto the canopy.
2. Screw the lamp into the socket. Please refer to the label on the socket for max wattage information.