

# MAGNUS LARGE PENDANT

EP1451

## General Product Information



Intertek




STANDARD  
INSTALLATION



INDOOR



DAMP LOCATION  
SAFE



NEC COMPLIANT  
JUNCTION BOX



CLEAN WITH SOFT,  
DRY CLOTH ONLY -  
NO HARSH CHEMICALS!



CONVERTS TO  
LED



SAVE THESE  
INSTRUCTIONS!

## Tools Required



PHILLIPS-HEAD  
SCREWDRIVER



WIRE CUTTER



ALLEN WRENCH



UTILITY  
KNIFE/BLADE

## Safety Information

### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



**Turn off electrical current at the source before working with any lighting fixture or portable lamp.**

**Install and use this product in adherence with local electrical codes and regulations.**



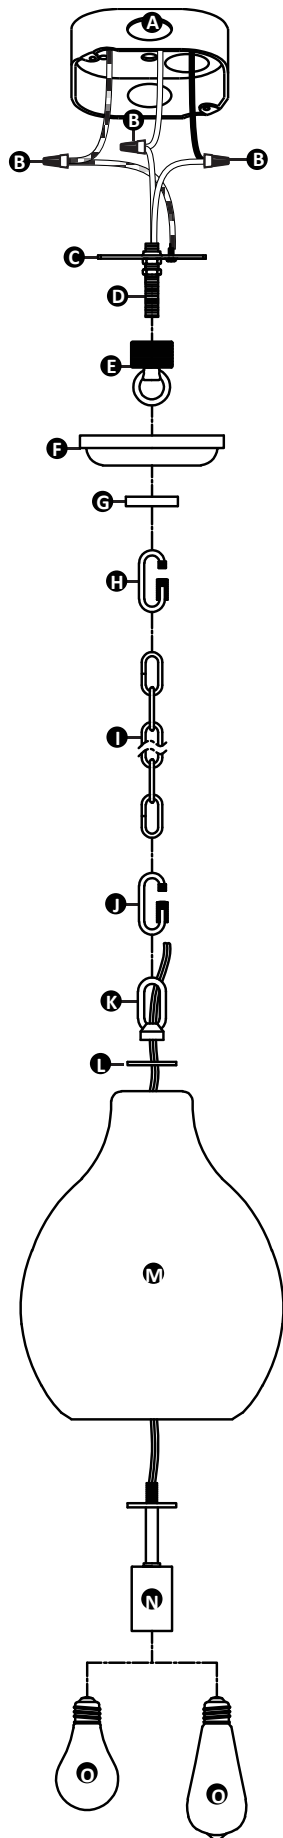

## **FIXTURE PARTS**

- A. Junction box
- B. Wire nut
- C. Mounting plate
- D. Threaded rod
- E. Screw collar/canopy loop
- F. Canopy
- G. Collar Nut
- H. Upper quick link
- I. Chain
- J. Lower quick link
- K. Fixture loop
- L. Check Ring
- M. Shade
- N. Socket
- O. Bulbs (Not Included)

## **INSTRUCTIONS**

### **I. Preparing the Fixture**

1. Feed the fixture wires and ground wires through the rod components, collar ring, and canopy.
2. Screw the rod components together.
3. Install the mounting plate to the junction box.
4. Screw the threaded nipple onto the mounting plate, then attach the collar and canopy loop onto the threaded nipple.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (round and smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (square and rigid) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

### **III. Installing the Fixture**

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the bulbs into the sockets. Please refer to the label on the socket for max wattage information.