







# NOEMIE LARGE CHANDELIER

KSC11210



**General Product Information**

 <p>Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>INDOOR</p>	 <p>DAMP LOCATION SAFE</p>
 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>CONVERTS TO LED</p>	 <p>PLEASE SEE <a href="http://visualcomfort.com">visualcomfort.com</a> FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>

  
WARRANTY

  
FCC STATEMENT

**Tools Required**


 <p>PHILLIPS-HEAD SCREWDRIVER</p>	 <p>PLIERS</p>
--	---

**Safety Information**

**CAUTION-RISK OF FIRE**

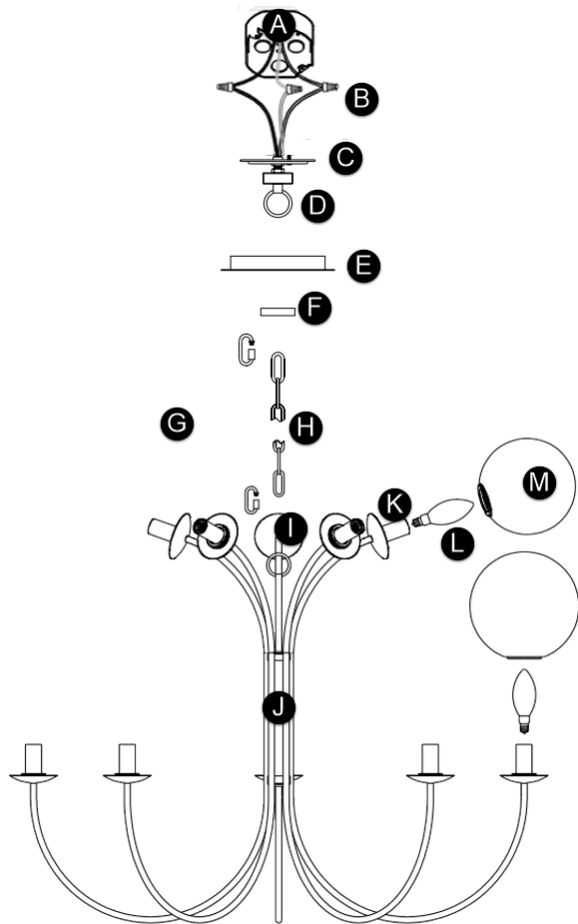
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**

 Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.





## FIXTURE PARTS

- A. Junction box
- B. Wires and wire nut
- C. Mounting bar
- D. Canopy loop
- E. Canopy
- F. Screw collar
- G. Quick links
- H. Chain
- I. Fixture Loop
- J. Fixture
- K. Socket
- L. Bulb (Not Included)
- M. Shade

## INSTRUCTIONS

### I. Preparing the Fixture

1. Secure the mounting bar to the junction box.
2. Feed the fixture wires and ground wire through the fixture and fixture loop, then screw both parts together.
3. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
  - a) Remove a portion of the chain by opening a link with pliers.
  - b) Install the bottom end of chain onto the fixture loop using the lower quick link.
  - c) Unscrew the collar nut from the screw collar.
  - d) Install the collar nut onto the chain, then install the canopy onto the chain.
  - e) Install the upper quick link onto the remaining end of chain, then secure the quick link onto the canopy loop.
4. Weave the cord through the chain, collar nut, canopy, screw collar, stem, and out of the junction box.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting bar, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (round and smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (square and rigid) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the bulbs into the sockets. Please refer to the label on the socket for max wattage information.
3. Lastly, screw the glass shades on the socket assemblies to complete installation.