


ARCHER ONE-LIGHT FLUSH MOUNT

DJF1021

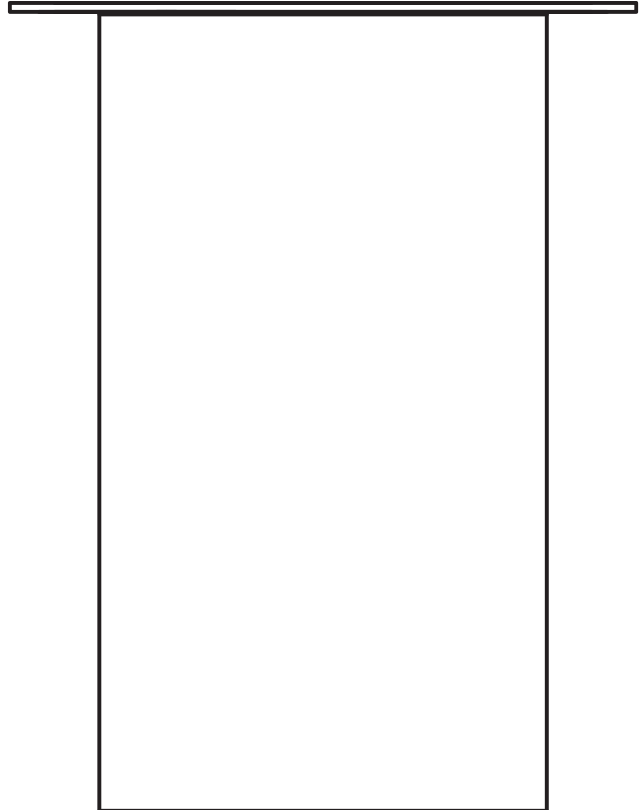

General Product Information

 Intertek	 FLUSH MOUNT	 STANDARD INSTALLATION
 INDOOR USE	 DAMP LOCATION SAFE	 DIMMER COMPATIBLE
 NEC COMPLIANT JUNCTION BOX	 CLEAN WITH SOFT DRY CLOTH ONLY - NO HARSH CHEMICALS!	 CONVERTS TO LED

Tools Required




Safety Information


SAVE THESE INSTRUCTIONS!

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.

	<p>Turn off electrical current at the source before working with any lighting fixture or portable lamp.</p> <p>Install and use this product in adherence with local electrical codes and regulations.</p>
---	---

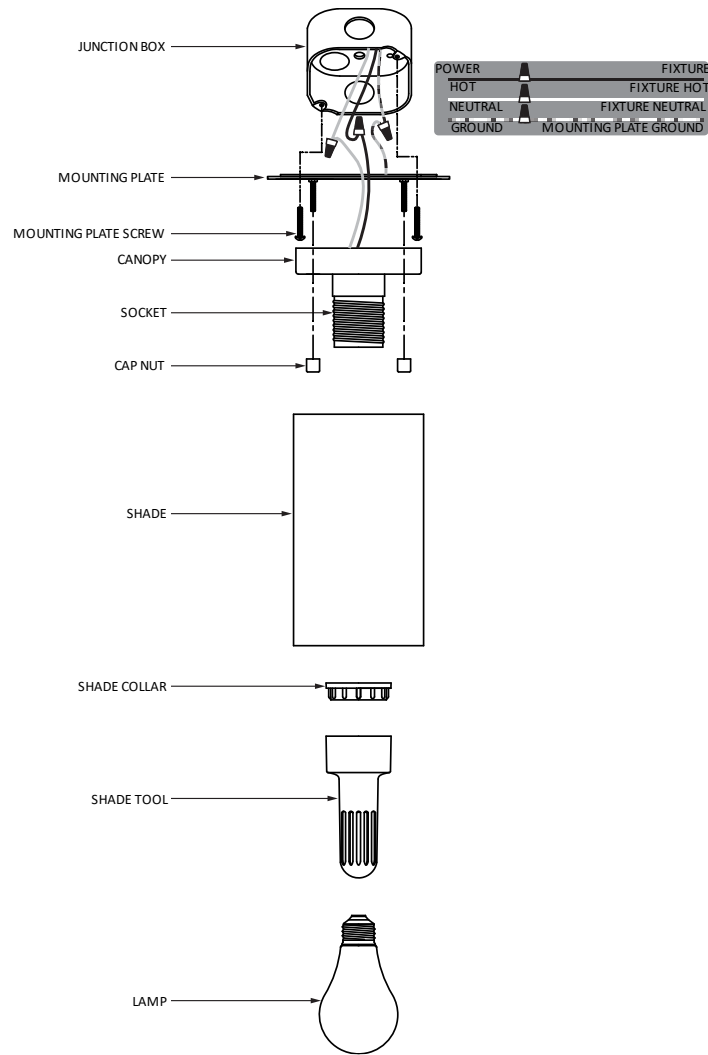

INSTRUCTIONS

I. Preparing for Installation

1. Remove the mounting plate from the canopy.
2. Install the mounting plate to the junction box and thread the wires through the center hole in the mounting plate.

II. Wiring the Fixture

3. Wrap the fixture ground wire to the green ground screw on the mounting plate and secure, then connect to the ground wire in the junction box using the wire nut.
4. Connect the following wires with a wire nut:
 - a) Fixture neutral wire to the outlet neutral wire.
 - b) Fixture hot wire to the outlet hot wire.

III. Installing the Fixture

5. Install the canopy to the junction box and secure with the cap nuts.
6. Insert bulb(s) into the socket and secure the shade with the shade collar.