



NODES SMALL LINEAR PENDANT

KC1143


General Product Information




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION



INDOOR



NEC COMPLIANT JUNCTION BOX



DAMP LOCATION SAFE




BULB(S) (NOT INCLUDED)



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



WARRANTY



FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER



WIRE CUTTER




ELECTRIC DRILL

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.



USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

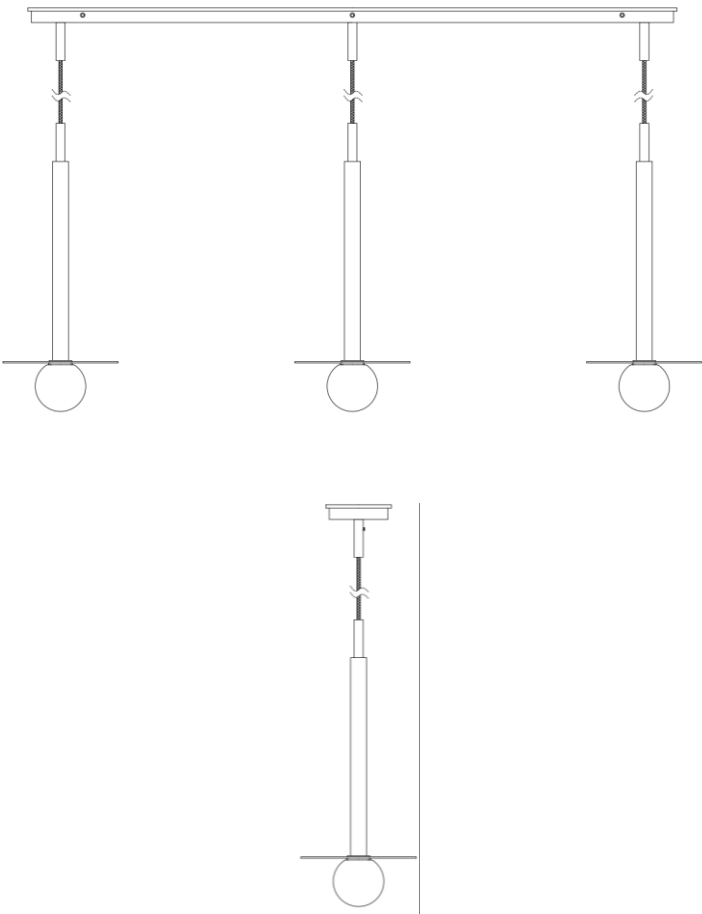

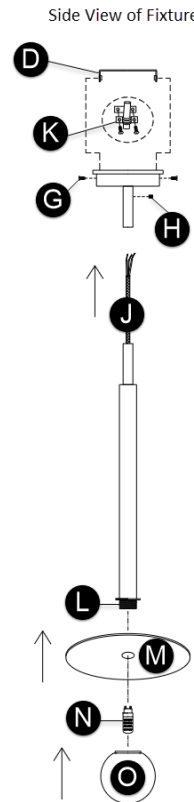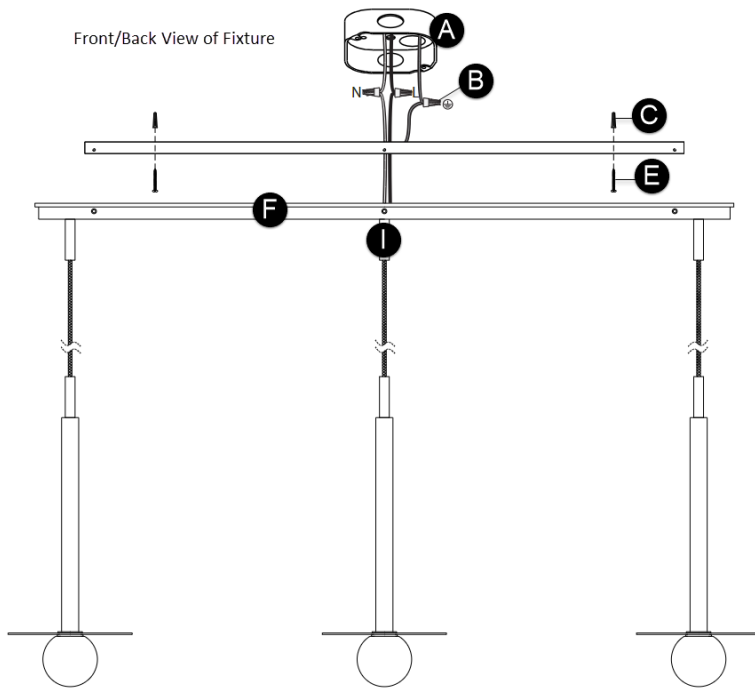

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Anchors
- D. Mounting Plate
- E. Mounting Screws (Not Provided)
- F. Canopy
- G. Fixture Screws
- H. Set Screws
- I. Fixture
- J. Cords
- K. Cord Clips
- L. Sockets
- M. Plates
- N. LED Bulbs (Not Included)
- O. Shades

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate and bracket from the fixture base.
2. Secure the mounting plate to the junction box using the mounting screws.
3. Mark the location for the anchors and install them accordingly.
4. Determine the desired height of the fixture and adjust the cords accordingly as follows:
 - a) Loosen (do not remove) the set screw for the cord.
 - b) Feed the cords up or down through the canopy until the preferred length is reached. Ensure that they are all the same length.
 - c) Place the cords in between the two cord clips and secure them in place using the clip screws.
 - d) Trim the cord, while leaving enough for electrical connections. Strip the insulation 4" from the end of the cord and then strip the end of the wires. Be careful not to nick the inner wires.
 - e) Tighten the set screw to secure the cord.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Black fixture wire (round and/or smooth) to hot power line wire
 - b) White fixture wire (square and/or rigid) to neutral power line wire
4. Carefully tuck all the wires and wire-nut connections into the junction box.

III. Installing the Fixture

1. Mount the fixture canopy onto the mounting plate and secure it in place by installing the fixture screws.
2. Screw the plates into the sockets.
3. Insert the LED bulbs into the sockets. Refer to the socket label for max wattage information.
4. To finish, install the shade over the LED blub and socket.