



# PERTH MEDIUM & EXTRA-LARGE CHANDELIERS

CC1744; CC1724

## General Product Information




SAVE THESE INSTRUCTIONS!




STANDARD INSTALLATION




INDOOR




NEC COMPLIANT JUNCTION BOX




DAMP LOCATION SAFE




CONVERTS TO LED



BULB(S) (NOT INCLUDED)




PLEASE SEE [visualcomfort.com](http://visualcomfort.com) FOR PRODUCT SPECS




CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



WARRANTY



FCC STATEMENT

## Tools Required



PHILLIPS-HEAD SCREWDRIVER



PLIERS




WIRE CUTTER

## Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

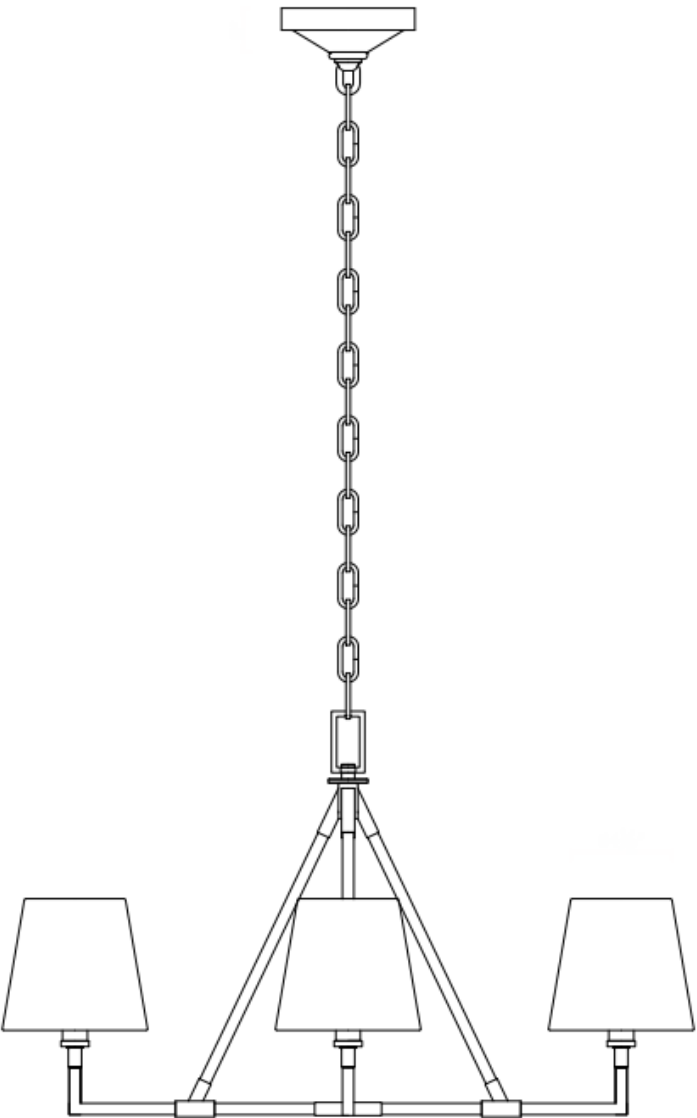

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Threaded Rod
- E. Screw Collar and Canopy Loop
- F. Canopy
- G. Collar Nut
- H. Quick Link
- I. Chain
- J. Fixture Loop
- K. Fixture Nipple
- L. Fixture
- M. Fixture Arms
- N. Socket Assemblies
- O. Candelabra Torpedo Bulbs (Not Included)
- P. Shades

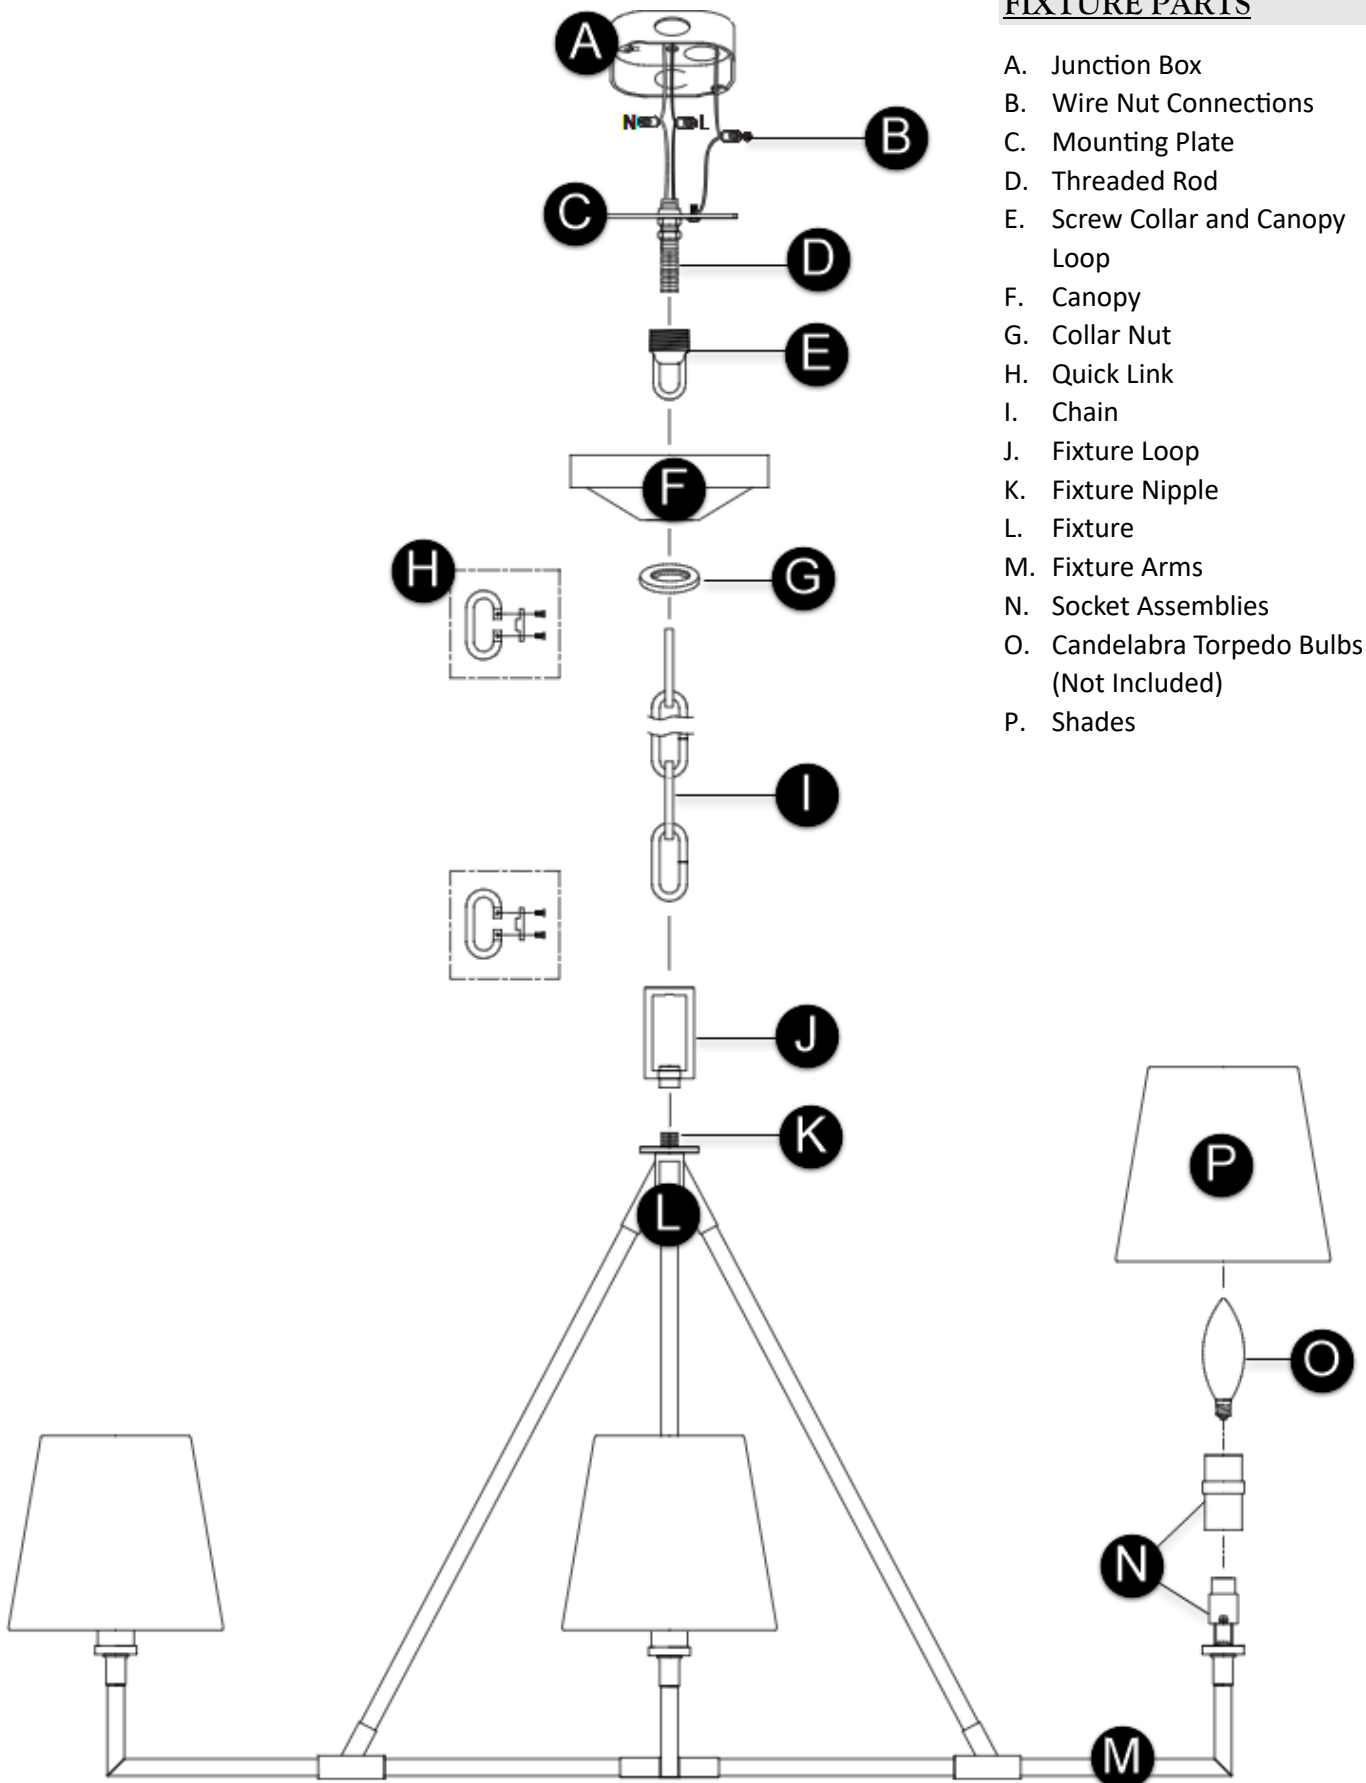

## **INSTRUCTIONS**

### **I. Preparing the Fixture**

1. If necessary, screw the shorter end of the threaded rod tightly onto the mounting plate and the screw collar/canopy loop onto the threaded rod.
2. Secure the mounting plate to the junction box.
3. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
  - a) Remove a portion of the chain by opening a link with pliers.
  - b) Install the bottom end of chain onto the fixture loop using the lower quick link.
  - c) Unscrew the collar nut from the screw collar.
  - d) Install the collar nut onto the chain.
  - e) Then install the canopy onto the chain.
  - f) Install the upper quick link onto the remaining end of chain.
  - g) Secure the quick link onto the canopy loop.
4. Weave the cord through the chain, collar nut, canopy, screw collar and canopy loop, threaded rod, and out of the junction box.
5. Trim the cord leaving enough to make electrical connections.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Black fixture wire (round and/or smooth) to hot power line wire
  - b) White fixture wire (square and/or rigid) to neutral power line wire
4. Carefully tuck all wires into the junction box.

### **III. Installing the Fixture**

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the bulbs into the sockets. Refer to socket label for max wattage information.
3. To finish, install the shades by sliding them over the bulbs.