

# GRAYSON LARGE CHANDELIER

LC1246

## General Product Information



Intertek



SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



BULB(S) (NOT INCLUDED)



PLEASE SEE [visualcomfort.com](http://visualcomfort.com) FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty




FCC Statement

## Tools Required



PHILLIPS-HEAD SCREWDRIVER




WIRE CUTTER

## Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

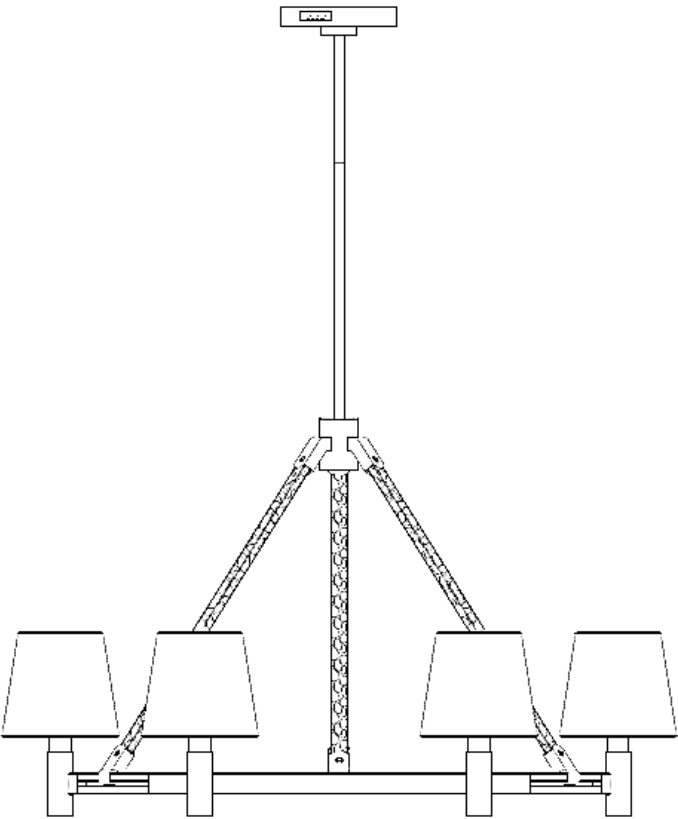

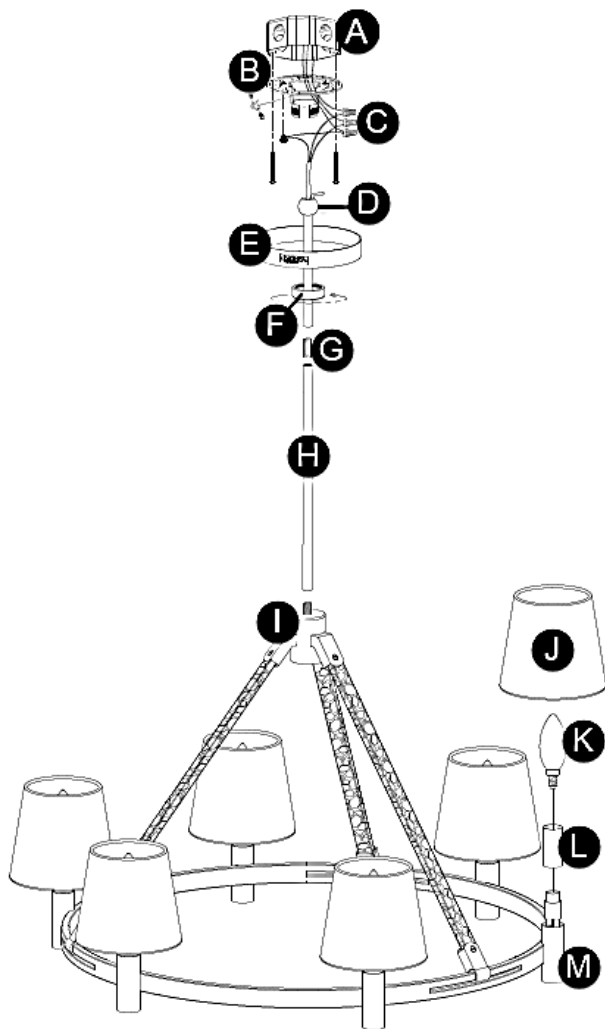

## FIXTURE PARTS

- A. Junction Box
- B. Mounting Plate & Mounting Screws
- C. Wire Nut Connections
- D. Half Ball/Swivel
- E. Canopy
- F. Collar Nut
- G. Stem Connector
- H. Stem
- I. Fixture Base
- J. Shades
- K. Bulbs (Not Included)
- L. Tubes
- M. Socket Bases

## INSTRUCTIONS

### **I. Preparing the Fixture**

1. Separate the mounting plate from the canopy.
2. Secure the mounting plate to the junction box with the mounting screws.
3. Screw the half ball to the top stem.
4. Determine the desired height of the fixture with the provided stems, then assemble them by screwing together.
5. Feed the fixture wires through the stem assembly, then screw the stem assembly to the top of the fixture.
6. Feed the fixture wires through the collar nut, canopy and half ball assembly, then screw it onto the stem assembly.
7. Slide the half ball assembly of the assembled fixture onto the mounting plate.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white, textured) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

### **III. Installing the Fixture**

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto the mounting plate.
2. Slide the candle tubes onto the socket bases.
3. Screw the bulbs into the sockets. Refer to the label on the socket for Max Wattage Information.
4. To complete the installation, slide the shades over the bulbs.