




ALDRIC 2 LIGHT MEDIUM & 3 LIGHT LARGE PENDANTS

AP1272; AP1283

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

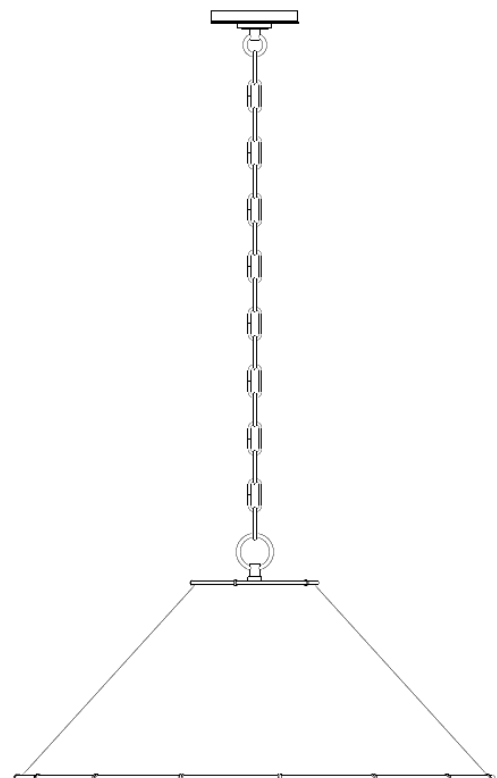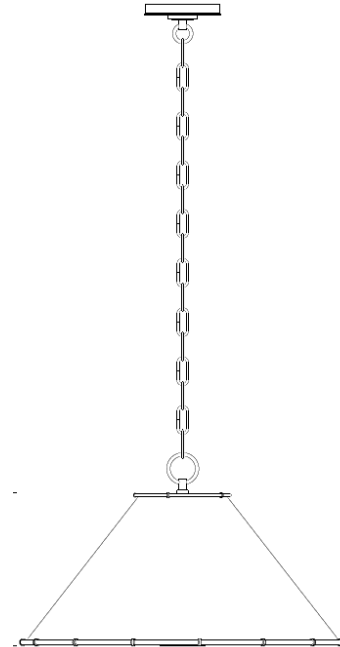

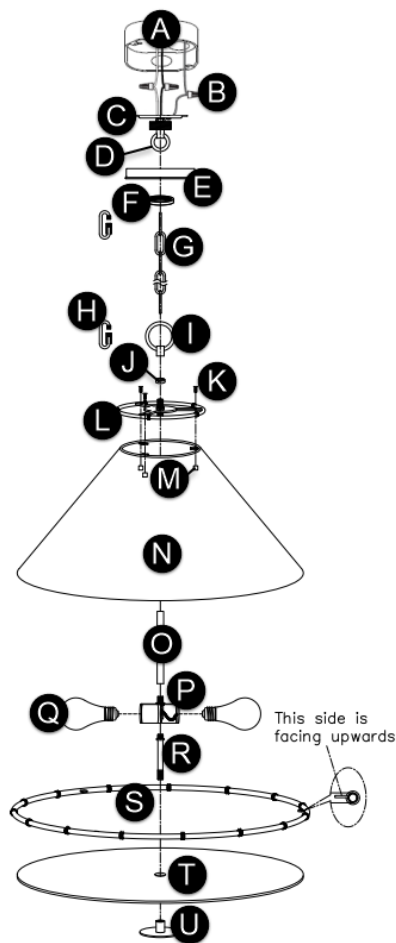

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Bar with Screw Collars & Mounting Screws (Not Illustrated)
- D. Canopy Loop
- E. Canopy
- F. Collar Nut
- G. Quick Links Chain Assembly
- H. Quick Links
- I. Fixture Loop
- J. Spacer
- K. Shade Screws
- L. Spider Ring
- M. Cap Nuts
- N. Shade
- O. Upper Rod
- P. Socket Assembly
- Q. Bulbs
- R. Lower Rod
- S. Shade Ring
- T. Diffuser
- U. Finial

INSTRUCTIONS

I. Preparing the Fixture

1. Install the mounting bar with screw collar and canopy loop to the junction box by using the mounting screws.
2. Feed the fixture wires from the socket through the upper rod and shade and thread through the spider ring, spacer and fixture loop.
3. Secure the fixture loop with the spacer to the spider ring.
4. Attach the spider ring to the shade with the shade screws and nuts.
5. Thread the upper rod inside the shade and screw on to the center of the spider ring.
6. Screw the socket assembly to the upper rod. Then screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
7. Screw the lower rod into the bottom of the socket assembly. Place the lower shade ring on the diffuser. (NOTE the side of the ring is to face upwards).
8. Lift the lower shade rings/diffuser onto the lower rod against the bottom rim of the shade and secure in place by screwing the finial to the lower rod through the diffuser.
9. Determine desired overall length, and amount of chain needed. Shorten the chain using the chain pliers. (Keep extra chain)
10. Attach the chain to the fixture loop using quick link, secure quick link.
11. Weave the fixture wires and ground wire through the chain and feed the chain and wires through the collar nut and canopy.
12. Attach the chain to the canopy loop using quick link, secure quick link.
13. Thread fixture wire and ground wire through the canopy loop, screw collar and mounting bar and out of junction box. NOTE: When you reach the junction box, ensure there is no tension on the wires. Cut excess wires, being sure to leave about 12" to reach the junction box.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length of any of the wires using a wire cutter/stripper, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black, smooth) fixture wire to hot power line wire
 - b) Neutral (white, textured) fixture wire to neutral power line wire

III. Installing the Fixture

1. Neatly place all the wires and wire nut connections in the canopy / junction box. Place the canopy onto the mounting bar and secure it in place by screwing the collar nut tightly onto the mounting bar.
2. Turn on the power.