

ALDRIC TWO LIGHT MEDIUM FLUSH MOUNT

AF1182

General Product Information



Intertek



SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE



NEC COMPLIANT JUNCTION BOX



BULB(S) (NOT INCLUDED)



CONVERTS TO LED



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!




BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty




FCC Statement

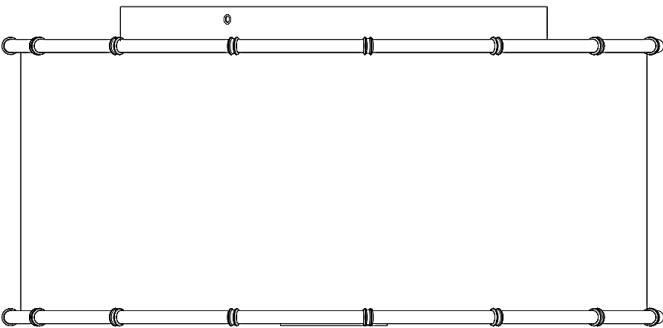


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

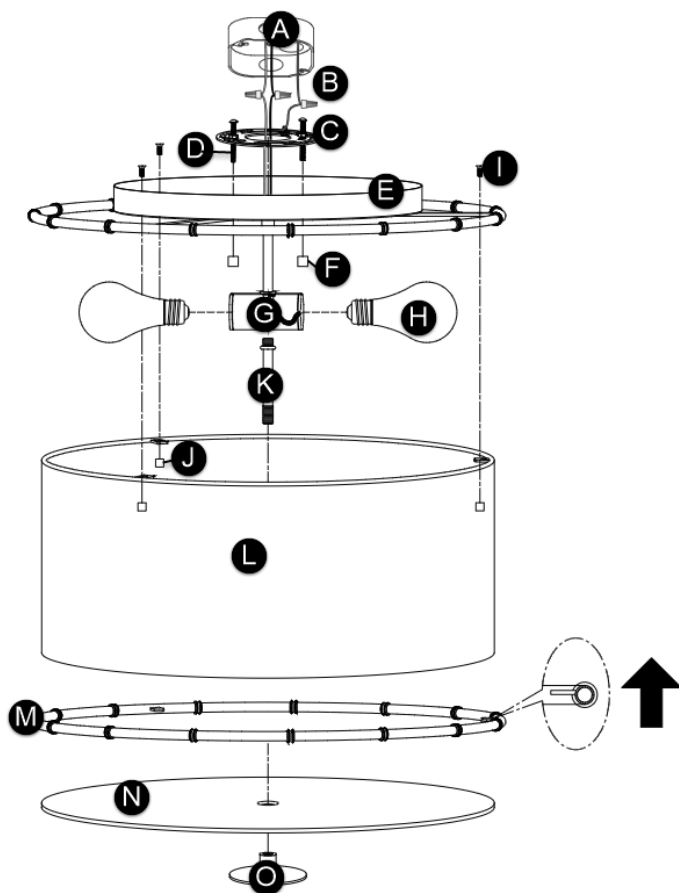

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Mounting Studs
- E. Fixture Base
- F. Cap Nuts
- G. Socket Assembly
- H. Bulbs (Not Included)
- I. Fixture Screws
- J. Fixture Screw Cap Nuts
- K. Threaded Rod
- L. Shade
- M. Metal Rings
- N. Diffuser
- O. Fixture Cap

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.
2. Install the mounting studs in alignment with the holes in the fixture base and with their heads facing the junction box.
3. Install the mounting plate to the junction box and secure it using the mounting screws.
4. Attach the shade to the fixture base with the fixture screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Align the holes in the fixture base with the mounting studs on the mounting plate and push upwards so that they poke through the holes in the fixture base.
2. Secure the fixture base to the mounting plate by screwing the cap nuts on the mounting screws.
3. Screw the bulb into the socket assembly. Refer to the socket label for max wattage information.
4. Install the threaded rod to the bottom of the socket assembly.
5. Attach the remaining metal ring and the diffuser to the bottom of the shade.
6. Secure the diffuser to the shade with the fixture cap to complete installation.