


ALTAIR LARGE LINEAR CHANDELIER

SLC1059

General Product Information



Suggested/Required Tools

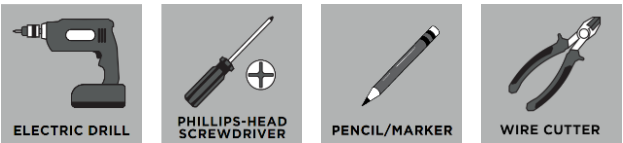

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

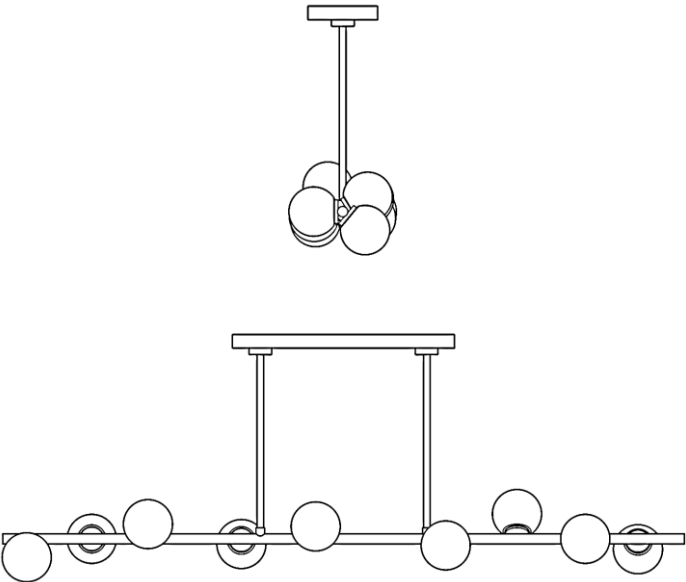

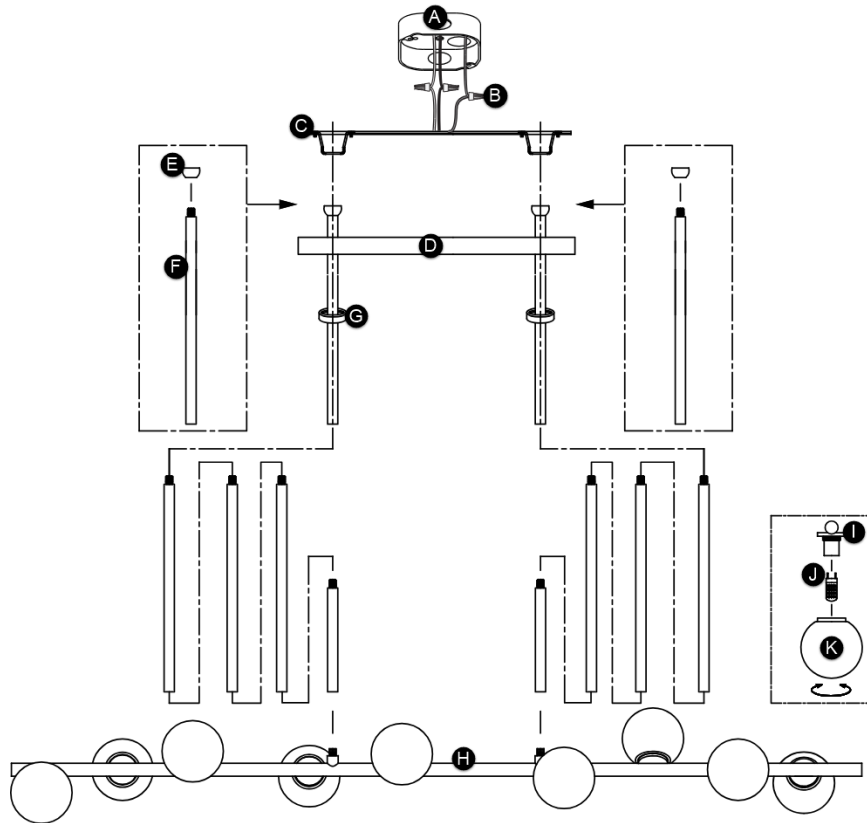

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate with Screw Collars & Mounting Screws (Not Illustrated)
- D. Canopy
- E. Half Balls
- F. Stem Assemblies (2)
- G. Collar Nuts (2)
- H. Fixture
- I. Sockets
- J. LEDs
- K. Globe Shades

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the fixture.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into.
3. Using the mounting screws, secure the mounting plate with the screw collars to the junction box.
4. Determine the desired fixture height and complete the stem assemblies to suit by screwing the stems together. Ensure that both completed stems are equal in length.
5. Feed the fixture wires through one of the assembled stems and screw it to the top of the fixture at the appropriate location.
6. Screw the remaining assembled stem to the corresponding location on top of the fixture.
7. Slide a collar nut (thread side up) onto each stem followed by the canopy.
8. Screw a half ball onto the top of each stem.
9. Lift the assembled fixture up and slide the half ball onto the screw collar portions of the canopy. It is best to have a second person assist with this installation.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Adjust the length of any of the wires using a wire cutter/stripper, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black/smooth) fixture wire to hot power line wire
 - b) Neutral (white/textured or ribbed) fixture wire to neutral power line wire
5. Carefully tuck all the wires behind the hanging plate into the junction box.
6. Place the canopy onto the mounting plate and secure it in place by screwing each of the collar nuts tightly onto it.

III. Installing the Fixture

1. Insert the LEDs into the sockets (refer to label for max wattage information) and install the globe shades over them to finish.